


DIPS Fabricated Cross



| DIPS Fittings Fabricated Cross | | | | | | |
|--------------------------------|---------|----|----------------|-----------------------------|-------|------------------------------|
| Nominal Pipe Size (in) | OD (in) | DR | Part # | Dimensions L (in) H (in) | | Weight Shipping (lbs) Method |
| 4 | 4.8 | 11 | ISFFCS0411DIPS | 15.64 | 4.1 | 5 FedEx |
| 6 | 6.9 | 11 | ISFFCS0611DIPS | 19.34 | 5.1 | 13 FedEx |
| 8 | 9.05 | 11 | ISFFCS0811DIPS | 23.16 | 5.17 | 26 FedEx |
| 10 | 11.1 | 11 | ISFFCS1011DIPS | 26.5 | 6 | 45 FedEx |
| 12 | 13.2 | 11 | ISFFCS1211DIPS | 30 | 8.45 | 77 LTL |
| 14 | 15.3 | 11 | ISFFCS1411DIPS | 33 | 8.85 | 112 LTL |
| 16 | 17.4 | 11 | ISFFCS1611DIPS | 36 | 9.3 | 156 LTL |
| | | 17 | ISFFCS1617DIPS | " | " | 105 " |
| 18 | 19.50 | 11 | ISFFCS1811DIPS | 40 | 10.25 | 217 LTL |
| | | 17 | ISFFCS1817DIPS | " | " | 146 " |
| 20 | 21.60 | 11 | ISFFCS2011DIPS | 52 | 15.2 | 363 LTL |
| | | 17 | ISFFCS2017DIPS | " | " | 244 " |
| 24 | 25.80 | 11 | ISFFCS2411DIPS | 54 | 14.1 | 516 LTL |
| | | 17 | ISFFCS2417DIPS | " | " | 347 " |

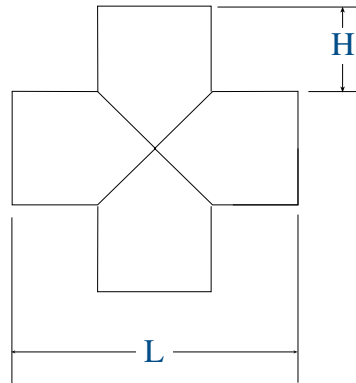

DIPS HDPE Fittings

Pressure Rating of Fab Cross is based pipe DR (Wall thickness) and resin properties.

| Crosses from 3608 resin: | |
|--------------------------|-----------------|
| DR | Pressure Rating |
| 7 | 107 psi |
| 9 | 80 psi |
| 11 | 64 psi |
| 13.5 | 51 psi |
| 15.5 | 44 psi |
| 17 | 40 psi |
| 21 | 32 psi |
| 26 | 26 psi |
| 32.5 | 20 psi |

| Crosses from 4710 resin: | |
|--------------------------|-----------------|
| DR | Pressure Rating |
| 7 | 134 psi |
| 9 | 101 psi |
| 11 | 81 psi |
| 13.5 | 64 psi |
| 15.5 | 56 psi |
| 17 | 50 psi |
| 21 | 40 psi |
| 26 | 32 psi |
| 32.5 | 26 psi |

Note: Size/DR listings shown are commonly requested. Many DR options not listed are available. Please consult an ISCO representative for availability.

1-800-345-ISCO

www.isco-pipe.com

