



Tired of pulling multiple cables? Fed up with long, bulky cable runs? Simplify with Intelix DIGI-V3A2 extenders.

When used with a compatible send balun, distribution amplifier, or matrix switcher, the DIGI-V3A2-R transmits component video and stereo audio up to 1,000 feet over a single twisted pair cable. Plus, built-in skew correction ensures perfect 1080i, 720p, 480i, and 480p video every time.

Intelix SD Series: audio/video distribution made better.


Maximum Distance	1,000 feet
Supported Signals	YPbPr, Y/C, com
	video, stereo audi
Supported Resolutions	1080i, 720p, 480i
Video Bandwidth	300 MHz
Audio Frequency Response	20 Hz to 20 kHz
Connectors	(3) RCA: video
	(2) RCA: audio
Skew Adjustment	Front panel (R,G,
-	pots
Enclosure	Metal
Max Distance of AV Cables	6 feet
Operating Temperature	-41 to 95 degrees
Range	-5 to 35 degrees (
Operating Humidity Range	5 to 90% non-cor
• •	

nposite lio)i, 480p B) trim s F С ndensing

Diagnostic Regulatory Shipping Weight Dimensions Intelix Part Number Included Accessories **Compatible Transmitters**

```
Power 5 VDC
Power LED
 CE, RoHS
 5.0 lbs
 5.25"x 3.38" x 1.00"
 DIGI-V3A2-R
 (1) 5 VDC power supply
 DIGI-V3A2-S
  DIGI-V3SD-S
  DIGI-VGASD-8X8
 DIGI-VGASD-16X16
 DIGI-VGASD-T4
 DIGI-VGASD-T8
 2 years
```

Warranty

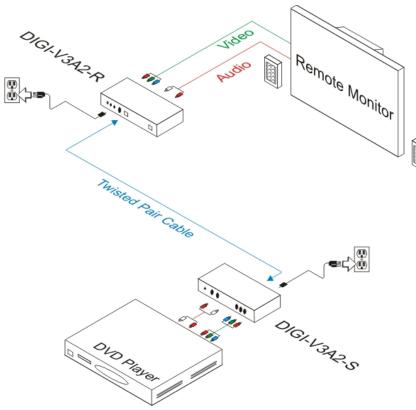





2222 Pleasant View Road Suite #1 Middleton, WI 53562

Phone: 608-831-0880 Toll-Free: 866-4-MATMIX Fax: 608-831-1833