


4x4 MATRIX FOR HDMI 1.3

Switch between any four HDMI 1.3 sources to any four HDMI displays



EXT-HDMI1.3-444

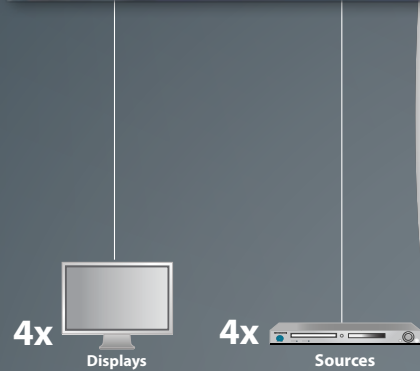

Features:

- Supports resolutions up to 1080p/60, 2K and 1920x1200
- Supports compressed lossless audio formats such as Dolby Digital TrueHD and DTS-HD Master Audio
- Extends the range of HDMI compliant signals by equalizing and reclocking the HDMI signal
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Rack-mountable
- HDMI 1.3 compliant
- HDCP compliant

SPECIFICATIONS:

- Maximum Pixel Clock: 225 MHz
- Maximum Resolution: 1080p/60, 1920x1200, 12 bit color depth
- Pass-through: lipsync, Deep Color, xvYCC color space
- HDMI Input: (4) Type A 19 pin female
- HDMI Output: (4) Type A 19 pin female
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Rack Size: 1U (rack-ears included)
- Power Supply: 24V DC, 5V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 6.8"D x 17.1" W x 1.8"H
- Shipping Weight / Unit Weight: 7 lbs. /3 lbs.

EXT-HDMI-CAT5-444



4x4 MATRIX OVER CAT-5e FOR HDMI

Switch between any four HDMI sources to any four HDMI displays with extension up to 300 feet (90 meters) over CAT-5e cable



FEATURES:

- Supports resolutions up to 1080p/60, 2K and 1920x1200
- Discrete IR remote control (included)
- Extends 1080i signals up to 300ft (90m)
- Extends 1080p signals up to 150ft (45m)
- IR back-channel to control source devices
- EDID modification ensures compatibility with HDMI 1.3 equipment
- Matrix can be remote controlled using the included RMT-444MSR receivers, optional IR remote controls, for the receivers, RS-232 control from receivers, or from the main unit
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Includes four receivers (EXT-HDMI-CAT5-444R)
- Rack-mountable
- HDMI 1.2 compliant/HDMI 1.3 compatible
- HDCP compliant

SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- HDMI Input: (4) Type A 19 pin female
- HDMI Output: (4) Type A 19 pin female
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Link Connector: (8) RJ-45 shielded
- Rack Size: 2U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions(S): 6.5"D x 17.1" W x 3.5"H
- Dimensions(R): 4.6"D x 7.5" W x 1.2"H
- Shipping Weight / Unit Weight: 15 lbs. /7 lbs.