

## CAT-5 7500HD EXTENDER

Extends two DVI, USB, PS/2, RS-232 and audio signal up to 200 feet (60 meters) away over 6 CAT-5e cables


### FEATURES:

- Extends any DVI compliant device up to 150 feet (45 meters) from the computer at 1920 x 1200
- Extends any DVI compliant device up to 200 feet (60 meters) from the computer at 1280 x 1024
- Extends USB 1.1, PS/2, RS-232, and audio devices up to 200 feet from the computer
- Uses CAT-5e cable for DDC and control signals
- Video is transmitted digitally for zero signal loss over CAT-5e cable
- Supports resolutions up to 1080p, 2K, and 1920 x 1200
- Supports DDWG standard for DVI compliant monitors
- Rack-mountable
- HDCP compliant

### SPECIFICATIONS:

- Max. Pixel Clock: 165 MHz
- Maximum Resolution: 1080p/60, 1920x1200
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- DVI Connector: DVI-I (29 pin) female (digital)
- Link Connectors: RJ-45 shielded
- PS/2 Connector: 6 Pin Mini-DIN
- Audio Connector: Mini stereo 3.5 mm jack
- USB Input Connector(1): Type B
- USB Input Connector(2): Type A
- RS-232 Input: DB-9 female
- RS-232 Output: DB-9 male
- Power Supply: 5V DC (external)
- Power Consumption: 20 Watts (max)
- Dimensions(S): 4.25"D x 17.2"W x 4.38"H x 1.75"
- Dimensions(R): 4.25"D x 15.2"W x 4.38"H x 1.75"
- Shipping Weight / Unit Weight: 8 lbs. /3 lbs.

EXT-CAT5-7500HD

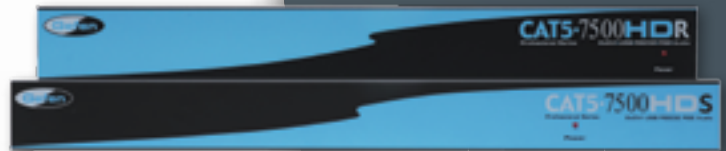

## CAT-5 9500HD EXTENDER

Extends one DVI, USB, PS/2, RS-232 and audio signal up to 200 feet (60 meters) over 4 CAT-5e cables

### FEATURES:

- Extends any DVI compliant device up to 150 feet from the computer at 1920x1200
- Extends any DVI compliant device up to 200 feet from the computer at 1280 x 1024
- Extends USB 1.1, PS/2, RS-232, and audio devices up to 200 feet from the computer
- Uses CAT-5e cable for DDC and control signals
- Video is transmitted digitally for zero signal loss over CAT-5e cables
- Supports resolutions up to 1080p, 2K, and 1920 x 1200
- Supports DDWG standard for DVI compliant monitors
- Rack-mountable
- HDCP compliant

### SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- DVI Connectors: DVI-I (29 pin) female (digital only)
- Link Connector: RJ-45 shielded
- PS/2 Connector: 6 pin Mini-DIN
- Audio Connector: Mini stereo 3.5 mm jack
- USB Input Connector(1): Type B
- USB Input Connector(2): Type A
- RS-232 Input: DB-9 female
- RS-232 Output: DB-9 male
- Power Supply: 5V DC
- Power Consumption: 10 Watts (max)
- Dimensions(S): 4.25"D x 17.2"W x 4.38"H x 1.75"
- Dimensions(R): 4.25"D x 15.2"W x 4.38"H x 1.75"
- Shipping Weight / Unit Weight: 8 lbs. /3 lbs.



EXT-CAT5-9500HD

