


# DISTRIBUTION AMPLIFIERS

EXT-COMPAUD-44424

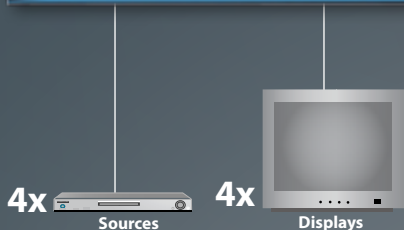

## 4x4 COMPONENT WITH AUDIO MATRIX

Switch any four Component video signals with audio to any four outputs in any combination





### FEATURES:

- Supports resolutions up to 1920x1200, 1920x1080p/60
- Analog right/left RCA audio and digital coaxial (S/PDIF) audio are supported
- Plug-and-play installation
- Discrete front panel switching
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Rack-mountable

### SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Maximum Resolution: 1080p
- Video Input Connectors: (4) YPbPr - 3 RCA
- Video Output Connectors: (4) YPbPr - 3 RCA
- Audio Input Connectors: (4) Analog L+R -RCA / (4) Digital Coaxial (S/PDIF)
- Audio Output Connectors: (4) Analog L+R -RCA / (4) Digital Coaxial (S/PDIF)
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Rack Size: 1U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 4.4"D x 17.1" W x 1.8"H
- Shipping Weight / Unit Weight: 9 lbs. /2 lbs.

EXT-COMPAUD-CAT5-444

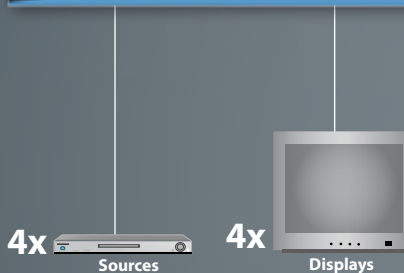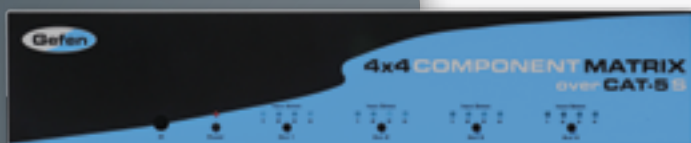

## 4x4 COMPONENT WITH AUDIO MATRIX OVER CAT-5

Switch any four Component video sources to any four outputs with extension of each output up to 1000 feet (300 meters) over one CAT-5e cable



### FEATURES:

- Supports resolutions up to 1080p/60
- Extends 1080p signals up to 300ft (90m)
- Analog right/left RCA audio and digital coaxial (S/PDIF) audio are supported
- IR back-channel to control source devices
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Includes four receivers (EXT-COMPAUD-CAT5-444R)
- Rack-mountable

### SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Maximum Resolution: 1080p
- Video Input/output Connectors: (4) YPbPr - 3 RCA
- Audio Input/Output Connectors: (4) Analog L+R -RCA (4) Digital Coaxial (S/PDIF)
- Link Connector: (4) RJ-45 shielded
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Blaster Port: (4) 3.5mm mini-stereo jack
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Rack Size: 2U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 4.8"D x 17.1" W x 3.5"H
- Shipping Weight / Unit Weight: 14 lbs. /5 lbs.

EXT-DVIKVM-444DL



## 4x4 DVI KVM DUAL LINK MATRIX

Switch any four dual link DVI signals to any four dual link DVI workstations with USB 1.1 and audio



### FEATURES:

- Supports resolutions up to 3840x2400
- Supports all major operating systems - Windows, MacOS and Linux
- USB 1.1 matrix switching capabilities
- Supports analog audio matrixing
- Discrete IR remote (included)
- Remote switching available using the EXT-RMT-MATRIX-848 (sold separately)
- Discrete switching via integrated RS-232 serial communications
- Supports DDWG standards for DVI monitors
- Rack-mountable

### SPECIFICATIONS:

- Maximum Pixel Clock: 2 x 165 MHz
- Maximum Resolution: 3840x2400
- DVI Input: (4) DVI-I 29 pin female
- DVI Output: (4) DVI-I 29 pin female
- Audio Input: (4) 3.5mm mini-stereo jack
- Audio Output: (4) 3.5mm mini-stereo jack
- USB Input Connection: (4) Type B
- USB Output Connection: (4) Type A
- Remote Switch Connection: (4) RJ-45 shielded
- Rack Size: 2U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 4.2"D x 17.1" W x 1.8"H
- Shipping Weight / Unit Weight: 9 lbs. /2 lbs.