

## COMPONENT VIDEO EXTENDER

Extends any component video signal up to 1000 feet (300 meters) over one CAT-5e cable




EXT-COMP-141

### FEATURES:

- Supports resolutions up to 1080p
- Power required only on transmitter; receiver power is supplied over the CAT-5e cable
- Plug & play installation
- Equalization adjustment for different CAT-5 skew
- One CAT-5e cable for extension
- No loss of quality

### SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Video In/Out: (3) RCA Component
- Link Connector: (1) RJ-45 shielded
- Power Supply: 5V DC
- Power Consumption: 5 Watts (max)
- Dimensions: 2"D x 3.5" W x 1.2"H
- Shipping Weight / Unit Weight: 2 lbs. / 1 lb

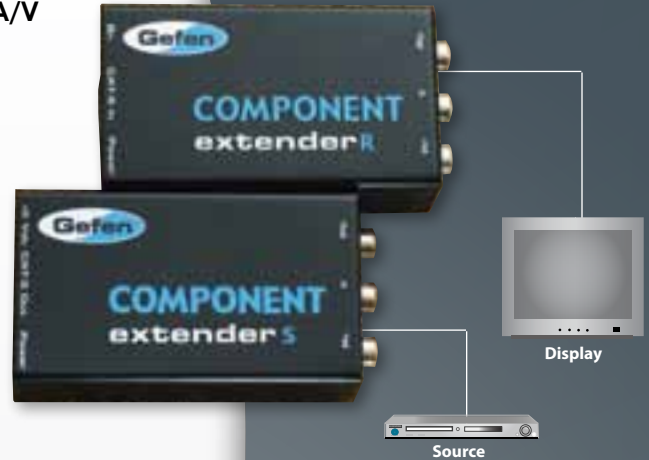

## COMPOSITE VIDEO WITH AUDIO EXTENDER

Extends any composite video signal with stereo audio up to 1000 feet (300 meters) over one CAT-5e cable



EXT-COMPOSITE-141

### FEATURES:

- Supports resolutions up to 480i composite video
- Supports analog left and right audio
- Power required only on transmitter; receiver power is supplied over the CAT-5e cable
- Plug & play installation
- One CAT-5e cable for extension
- No loss of quality

### SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Video In/Out: (1) RCA Composite
- Audio In/Out: (2) RCA L+R Audio
- Link Connector: (1) RJ-45 shielded
- Power Supply: 5V DC
- Power Consumption: 5 Watts (max)
- Dimensions: 2"D x 3.5" W x 1.2"H
- Shipping Weight / Unit Weight: 2 lbs. / 1 lb



## COMPONENT VIDEO WITH AUDIO EXTENDER

Extends any component video signal with stereo/digital audio up to 1000 feet (300 meters) over one CAT-5e cable



EXT-COMPAUD-141

### FEATURES:

- Supports resolutions up to 1080p
- Supports analog left and right audio
- Supports digital TOSLINK and S/PDIF
- Plug & play installation
- Equalizations for different CAT-5e skew
- One CAT-5e cable for extension
- No loss of quality

### SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Video In/Out: (3) RCA Component
- Analog Audio In/Out: (2) RCA L+R Audio
- Digital Audio In/Out: (1) TOSLINK and (1) SPDIF
- Link Connector: (1) RJ-45 shielded
- Power Supply: 5V DC
- Power Consumption: 10 Watts (max)
- Dimensions: 2.7"D x 5.2" W x 1.2"H
- Shipping Weight / Unit Weight: 3 lbs. / 1 lb

