


EXT-CAT5-5500

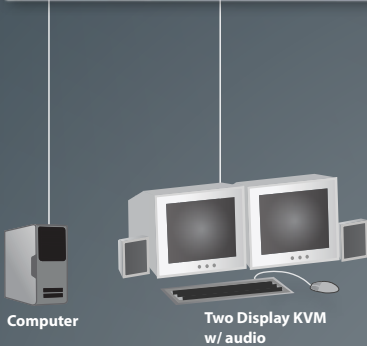

CAT-5 5500 EXTENDER

Extends any dual VGA signal with USB 1.1 and audio up to 450 feet (135 meters) over three CAT-5e cables


FEATURES:

- Extends any two VGA signals up to 450 ft. (135m)
- Supports resolutions up to 1920x1200
- Extends USB 1.1 signals up to 450 ft. (135m)
- Stereo audio is extended for multimedia applications
- Brightness and focus adjustments for fine tuning the output signal
- Uses three CAT-5e cables
- Local video output on the sender unit
- Rack-mountable

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Video In: (1) HD-15 male
- Video Out/Receiver: (2) HD-15 female
- Video Out/Sender: (2) HD-15 female
- Audio Connector: (1) 3.5mm mini-stereo jack
- Link Connectors: (3) RJ-45 shielded
- USB Input Connectors: (1) Type B
- USB Output Connectors: (4) Type A
- Power Supply: 5V DC
- Power Consumption: 20 Watts (max)
- Dimensions(S): 4.2"D x 8.4" W x 1.6"H
- Dimensions(R): 4.25"D x 17.1" W x 1.6"H
- Shipping Weight / Unit Weight: 7 lbs. /3 lbs.

EXT-CAT5-7000

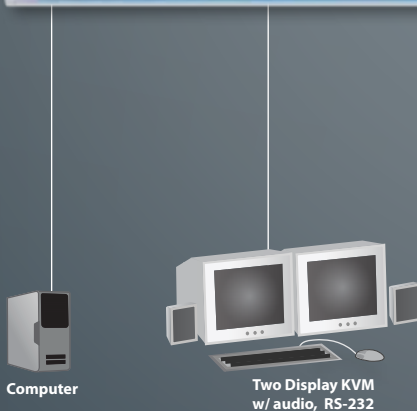

CAT-5 7000 EXTENDER

Extends any dual VGA signal with PS/2, USB 1.1, RS-232 and audio up to 330 feet (100 meters) over four CAT-5e cables

FEATURES:

- Supports resolutions up to 1920x1200
- Extends USB 1.1 signals up to 330 ft. (100m)
- Built-in 4-port USB hub on the receiver
- Bi-directional audio transmission for speaker and microphone
- Dual audio signal extension with one audio signal return
- Brightness and focus adjustments for fine tuning the output signal
- Uses four CAT-5e cables
- Local video output on the sender unit
- Rack-mountable

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Video In: (2) HD-15 male
- Video Out/Receiver: (2) HD-15 female
- Video Out/Sender: (2) HD-15 female
- Audio Connector In: (3) 3.5mm mini-stereo jack
- Audio Connector Out: (3) 3.5mm mini-stereo jack
- Link Connectors: (4) RJ-45 shielded
- RS-232 Connector: DB-9
- PS/2 Connectors: 6 pin mini-DIN
- USB Input/Output Connectors: (1) Type B/(4) Type A
- Power Supply: 5V DC
- Power Consumption per unit: 20 Watts (max)
- Dimensions(S): 4.2"D x 17.1" W x 1.4"H
- Dimensions(R): 4.2"D x 8.4" W x 2"H
- Shipping Weight / Unit Weight: 8 lbs. /3 lbs.