


DISTRIBUTION AMPLIFIERS - HDMI

EXT-HDMI-CAT5-144

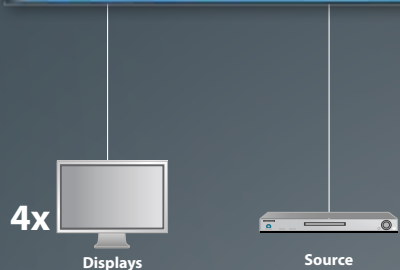

1:4 SPLITTER OVER CAT-5 FOR HDMI

Split one HDMI signal to four HDMI outputs with extension of each output up to 300 feet (90 meters) over 2 CAT-5e cables

FEATURES:

- Supports resolutions up to 1080p/60, 2K and 1920x1200
- Extends 1080i signals up to 300ft (90m)
- Extends 1080p signals up to 150ft (45m)
- EDID modification ensures compatibility with HDMI 1.3 equipment
- Rack-mountable
- HDMI 1.2 compliant/HDMI 1.3 compatible
- HDCP compliant

Note: Sender Unit Only


Use Receiver: EXT-HDMI-CAT5DAR

SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- HDMI Input: (1) Type A 19 pin female
- HDMI Output: (4) Type A 19 pin female
- Link Connector: (8) RJ-45 shielded
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 4.1"D x 17.1" W x 3.5"H
- Shipping Weight / Unit Weight: 1 lb /3 lb



EXT-HDMI-CAT5-145

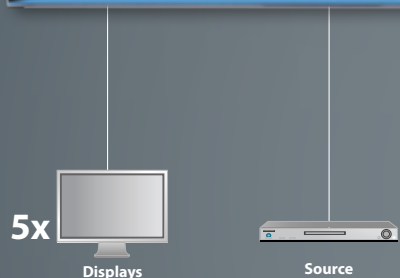

1:5 SPLITTER OVER CAT-5 FOR HDMI

Split one HDMI signal to five HDMI outputs with extension of each output up to 300 feet (90 meters) over 2 CAT-5e cables

FEATURES:

- Supports resolutions up to 1080p/60, 2K and 1920x1200
- Extends 1080i signals up to 300ft (90m)
- Extends 1080p signals up to 150ft (45m)
- EDID modification ensures compatibility with HDMI 1.3 equipment
- Rack-mountable
- HDMI 1.2 compliant/HDMI 1.3 compatible
- HDCP compliant

Note: Sender Unit Only


Use Receiver: EXT-HDMI-CAT5DAR

SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- HDMI Input: (1) Type A 19 pin female
- HDMI Output: (5) Type A 19 pin female
- Link Connector: (10) RJ-45 shielded
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions(S): 5.4"D x 17.1" W x 3.5"H
- Shipping Weight / Unit Weight: 11 lb /4 lbs.



EXT-HDMI-CAT5-148

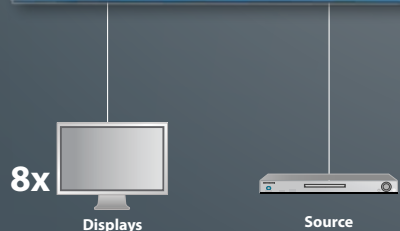

FEATURES:

- Extends 1080i signals up to 300ft (90m)
- Extends 1080p signals up to 150ft (45m)
- EDID modification ensures compatibility with HDMI 1.3 equipment
- Rack-mountable
- HDMI 1.2 compliant/HDMI 1.3 compatible
- HDCP compliant

Note: Sender Unit Only

Use Receiver: EXT-HDMI-CAT5DAR

SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- HDMI Input: (1) Type A 19 pin female
- HDMI Output: (8) Type A 19 pin female
- Link Connector: (16) RJ-45 shielded
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 5.4"D x 17.1" W x 1.7"H
- Shipping Weight / Unit Weight: 5 lbs. /2 lbs.

