

AV CINEMA SCALER PRO*

Switch between multiple digital and analog sources with output up to 2K

EXT-AVCINEMAAA



FEATURES:

- Multiple inputs available; (2) component, (1) VGA, (1) DVI-I, (1) DVI-D, and (1) HDMI
- All inputs, except HDMI, support analog L+R RCA audio and digital coaxial (S/PDIF) audio
- All inputs are format converted and pixel re-scaled
- DB-25 analog audio input; using bypass mode (DB-25 digital audio on digital model)
- DB-25 analog audio output
- On-screen display for easy access of features
- Rack-mountable
- HDMI 1.2 compliant
- HDCP compliant

SPECIFICATIONS:


- Digital Maximum Pixel Clock: 165 MHz
- Analog Video Bandwidth: 350 Mhz
- Maximum Input Resolution: 1920x1200/60Hz
- Maximum Output Resolution: 2K; 2048x1080/60Hz
- HDMI Input Connector: (1) Type A 19 pin female
- DVI Input Connector: (2) DVI-I (29 pin) female
- DVI Output Connector: (2) DVI-I (29 pin) female
- Component Input Connector: (2) YPbPr - 3 RCA
- VGA Input Connector: (1) HD-15 female
- Analog Audio Input Connector: (5) L+R RCA, (1) DB-25 (analog model)
- Digital Audio Input Connector: (5) Coaial (S/PDIF), (1) DB-25 (digital model)
- Audio Output Connector: (1) DB-25
- Rack Size: 1.5U (rack-ears included)
- Power Supply: 12V DC
- Power Consumption: 80 Watts (max)
- Dimensions: 8"D x 16.9" W x 1.7"H
- Shipping Weight / Unit Weight: 6 lbs. / 2 lbs.

*Digital Model: [EXT-AVCINEMAAD](#)

TV MULTI FORMAT SWITCHER

Switch between multiple digital and analog sources to one HDMI output

EXT-TV-MFS

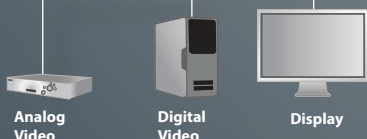

FEATURES:

- Multi Format Switcher allows more inputs to be connected to one HDTV display
- Multiple inputs available; (2) composite, (2) s-video, (2) component, (1) VGA, and (3) HDMI
- Selectable de-interlacing of 480i/576i sources to 480p/576p using back panel button
- Supports resolutions up to 1920x1200/60Hz
- All inputs are format converted and output through HDMI
- Support audio delay for 150ms on all analog inputs
- 3D noise reduction (DNR) and 3D comb filter
- Discrete front panel switching
- Discrete switching via integrated RS-232 serial communications
- Discrete IR remote (included)
- Rack-mountable
- HDMI 1.3 compliant; Deep Color video up to 10bit 1080p-24Hz/60Hz, Dolby TrueHD, DTS-HD Master Audio
- HDCP compliant

SPECIFICATIONS:

- Digital maximum pixel clock: 225MHz
- Analog Video Bandwidth: 350 Mhz
- Input DDC Signal: 5 Volts p-p (TTL)
- Input Video Signal: 1.2 Volts p-p
- Maximum Resolution: 1080p/1920 x 1200/60Hz
- HDMI Input Connector: (3) Type A 19 Pin female
- HDMI Output Connector: (1) Type A 19 Pin female
- Component Input Connector: (2) YPbPr - 3 RCA
- Composite Input Connector: (2) CVBS - 1 RCA
- VGA Input Connector: (1) HD-15 female
- S-video Input connector: (1) Y/C - 4 pin mini-DIN
- Analog Audio Input Connector: (6) L+R RCA, (1) 3.5mm stereo mini-jack
- Rack Size: 1U (rack-ears included)
- Power Supply: 5V DC
- Power Consumption: 20 Watts (max)
- Dimensions: 6.2"D x 17.2" W x 1.8"H
- Shipping Weight / Unit Weight: 6 lbs. / 2 lbs.