



## AutoView Digital KVM Appliances Secure access from any location

### Secure remote and local access in a single solution for the SMB environment

The Avocent® AutoView® digital KVM appliances include access for one or two digital users and access for a local user in a single solution. The on-board Web interface lets you remotely and securely manage all connected servers and serial-based devices from any location. The local port gives you convenient at-the-rack access. These solutions also include local PS/2 and USB peripheral support.

The AutoView digital KVM appliance offers LDAP user authentication, SSL-128 bit, DES, 3DES or AES communication, which are superior to industry standards. Other security features include 64 user accounts and an access control list for each user.



The AutoView digital KVM appliances provide secure access for one or two digital users and a local analog user in a single location.

### Benefits

- **Security.** LDAP authenticated and encrypted IP communication between the user's browser and switch can be SSL-128 bit, DES, 3DES or AES.
- **On-Board Web Interface.** No need to load and manage another software program on the user's PC.
- **Access.** One or two digital paths let you remotely manage all connected servers and serial-based devices. A local port provides at-the-rack access for a local analog user.
- **Multi-Platform Support.** Local PS/2 and USB connections and multi-platform target devices, including PS/2, USB, Sun and serial support.
- **IPv6 Support.** Supports Internet Protocol Version 6.


Part Number	Description
-------------	-------------

## Ordering Details

AV3008-XXX	AutoView 3008 digital KVM appliance, one digital port with local port, 8 target devices
AV3016-XXX	AutoView 3016 digital KVM appliance, one digital port with local port, 16 target devices
AV3200-XXX	AutoView 3200 digital KVM appliance, two digital ports with local port, 16 target devices
PS2IAC-7	7 ft. PS/2 CAT-5 integrated access cable
PS2IAC-10	10 ft. PS/2 CAT-5 integrated access cable
PS2IAC-15	15 ft. PS/2 CAT-5 integrated access cable
USBIAC-7	7 ft. USB CAT-5 integrated access cable
USBIAC-10	10 ft. USB CAT-5 integrated access cable
USBIAC-15	15 ft. USB CAT-5 integrated access cable
AVRIQ-PS2	Server interface module for VGA, PS/2 keyboard, mouse
AVRIQ-PS2L	Server interface module for VGA, PS/2 keyboard, mouse
AVRIQ-USB	Server interface module for VGA, USB keyboard, mouse
AVRIQ-VSN	Server interface module for VGA or 13W3, Sun keyboard, mouse
AVRIQ-VMC-G01	USB2 server interface module supporting Virtual Media and Smartcard (CAC) - 20in cabling
AVRIQ-SRL	Server interface module for VT100 serial devices for extended distance (requires UPD-AM)

For country-specific availability, please contact an Avocent sales representative.

The AutoView digital appliances let you securely access targeted devices from any location.

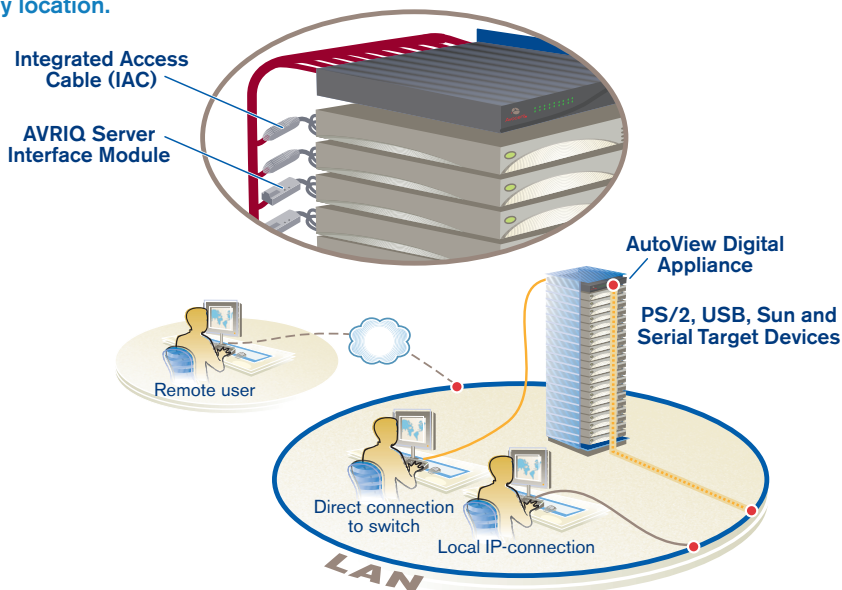

## Specifications

### Mechanical

**Size:** 1.72 in. (4.37 cm)H, 17 in. (43.18 cm)W, 10.98 in. (27.98 cm)D

### Weight:

AV3200: 7.3 lbs. (3.31 kg)

AV3008/3016: 4.2 lbs. (1.9 kg)

**Style:** Rack mount

### Environmental

**Operating Temperature:** 32° to 104°F (0° to 40°C)

### Storage Temperature:

AV3200: -4° to 158°F (-20° to 70°C)

AV3008/3016: -4° to 122°F (-20° to 50°C)

### Power

**Operating Voltage:** 100-240 VAC

**Power Frequency:** 50-60 Hz auto-sensing

### Input:

AV3200: 40 W maximum

AV3008/3016: 15 W maximum

### Supported Hardware

**Computers:** PS/2, Sun, USB

**Monitors:** VGA, SVGA (XGA, XGA-II with adaptor)

Maximum Local Port: 1600x1200

3200 Maximum remote port: 1280x1024@75Hz

3008/3016 Maximum remote port: 1600x1200@60Hz

**Peripherals:** USB keyboard and mouse, PS/2 keyboard, PS/2 mouse, IntelliMouse®

### Standards

#### Approved Agency:

UL, FCC, cUL, ICES-003, CE, GS (3200 only), VCCI, MIC, C-Tick, GOST

### Warranty

Two Years