

EXT-DVI-148

## 1:8 DVI DISTRIBUTION AMPLIFIER


Split one single link DVI signal to eight DVI outputs

### FEATURES:

- Supports resolutions up to 1920x1200, 1920x1080p/60
- Supports single link sources
- Plug-and-play installation
- Front mounted outputs allow easy access
- Supports DDWG standard for DVI compliant monitors
- Rack-mountable
- HDCP compliant

### SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- DVI Input Connector: (1) DVI-I 29 pin female
- DVI output Connector: (8) DVI-I 29 pin female
- Rack Size: 1U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 5.4"D x 17.1" W x 1.6"H
- Shipping Weight / Unit Weight: 6 lbs. /2 lbs.

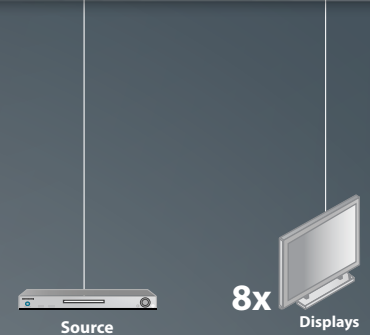

## 2:8 DVI DISTRIBUTION AMPLIFIER

Split and switch between two DVI signals to eight HDMI outputs


### FEATURES:

- Supports resolutions up to 1920x1200, 1920x1080p/60
- Supports single link sources
- Plug-and-play installation
- Front mounted outputs allow easy access
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Supports DDWG standard for DVI monitors
- Rack-mountable
- HDCP compliant



### SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- DVI Input Connector: (2) DVI-I 29 pin female
- DVI output Connector: (8) DVI-I 29 pin female
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Rack Size: 1U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 5.4"D x 17.1" W x 1.6"H
- Shipping Weight / Unit Weight: 6 lbs. /2 lbs.

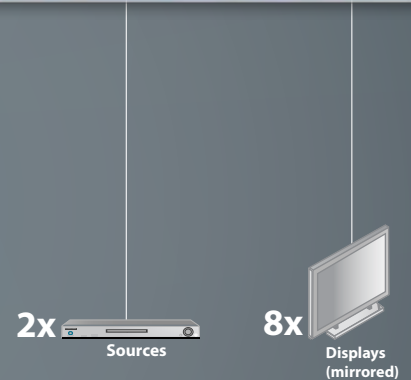

EXT-DVI-248

## 4x4 DVI DL MATRIX

Switch between any four dual link DVI signals to four DVI outputs in any combination



### FEATURES:

- Supports resolutions up to 3840x2400
- Supports dual link sources
- Plug-and-play installation
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Supports DDWG standard for DVI monitors
- Rack-mountable
- HDCP compliant

### SPECIFICATIONS:

- Maximum Pixel Clock: 2 x 165 MHz
- Maximum Resolution: 3840 x 2400
- DVI Input Connector: (4) DVI-I 29 pin female
- DVI output Connector: (4) DVI-I 29 pin female
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Rack Size: 1U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 4.25"D x 17.1" W x 1.7"H
- Shipping Weight / Unit Weight: 7 lbs. /2 lbs.



EXT-DVI-444DL