




Tired of pulling multiple cables? Fed up with long, bulky cable runs? Simplify with Intelix DIGI-V3A2 extenders.

When used with a compatible receive balun, the DIGI-V3A2-S transmits component video and stereo audio up to 1,000 feet over a single twisted pair cable.

Intelix SD Series: audio/video distribution made better.

Maximum Distance	1,000 feet	Enclosure	Metal
Supported Signals	YPbPr, Y/C, composite	Power	5 VDC
	video, stereo audio	Diagnostic	Power LED
Supported Resolutions	1080i, 720p, 480i, 480p	Regulatory	CE, RoHS
Video Bandwidth	300 MHz	Shipping Weight	5.0 lbs
Audio Frequency Response	20 Hz to 20 kHz	Dimensions	5.25"x 3.38" x 1.00"
Connectors	(3) RCA: video	Intelix Part Number	DIGI-V3A2-S
Connectors	(2) RCA: audio	Included Accessories	(1) 5 VDC power supply
Max Distance of AV Cables	6 feet	Compatible Receivers	DIGI-V3A2-R
Operating Temperature	-41 to 95 degrees F	Compatible Receivers	DIGI-V3A2-R DIGI-V3SD-R
	-5 to 35 degrees C	Wannanty	
Range	e	Warranty	2 years
Operating Humidity Range	5 to 90% non-condensing		
DIGILUSAL Remote Monitor			

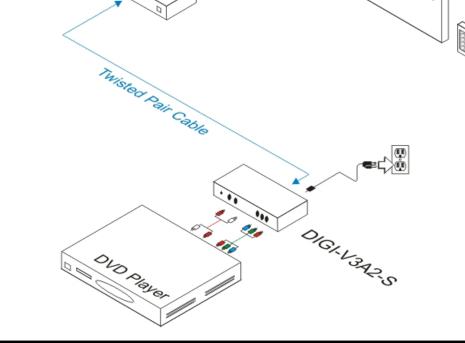





2222 Pleasant View Road Suite #1 Middleton, WI 53562 Phone: 608-831-0880 Toll-Free: 866-4-MATMIX Fax: 608-831-1833