

4x4 VGA MATRIX

Switch any four VGA signals with audio to any four VGA outputs in any combination



EXT-VGAAUD-444




FEATURES:

- Supports resolutions up to 1920x1200
- Analog audio matrixing supported
- Plug-and-play installation
- Discrete front panel switching
- Discrete IR remote (included)
- Discrete switching via integrated RS-232 serial communications
- Rack-mountable

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Video Input Connectors: (4) HD-15 VGA
- Video Output Connectors: (4) HD-15 VGA
- Audio Input Connectors: (4) 3.5mm mini-stereo jack
- Audio Output Connectors: (4) 3.5mm mini-stereo jack
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Rack Size: 1U (rack-ears included)
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 5.8"D x 17" W x 5.8"H
- Shipping Weight / Unit Weight: 4 lbs. /9 lbs.



1:3 COMPONENT AUDIO DISTRIBUTION AMPLIFIER

Split one component A/V signal with audio to three component A/V outputs

FEATURES:


- Supports resolutions up to 1080p/60
- Connects up to three component displays at the same time to one video source
- Analog right/left RCA audio and digital (coaxial) audio are supported
- Support SD (composite) and HDTV (YPbPr, RGsB) input signals

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Maximum Resolution: 1080p/60, 1920x1200
- Video Input Connectors: (1) YPbPr - 3 RCA
- Video Output Connectors: (3) YPbPr - 3 RCA
- Audio Input Connectors: (1) Analog L+R -RCA (1) Digital Coaxial (S/PDIF)
- Audio Output Connectors: (1) Analog L+R -RCA (1) Digital Coaxial (S/PDIF)
- Power Supply: 5V DC
- Power Consumption: 5 Watts (max)
- Dimensions: 3.6"D x 5.5" W x 1.5"H
- Shipping Weight / Unit Weight: 1 lb /3 lbs.



EXT-COMPAUD-143



1:8 COMPONENT DISTRIBUTION OVER CAT-5*

Split one component video signal to eight component video outputs with extension of each output up to 300 feet (90 meters) over one CAT-5e cable

FEATURES:


- Supports resolutions up to 1920x1200
- Extends each component video output
- Analog right/left RCA audio and digital (coaxial and optical) audio are supported
- signal up to 330 feet over 1 CAT-5e
- Power for the receivers are supplied over the CAT-5e cable
- Rack-mountable

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Video Input Connectors: (1) YPbPr - 3 RCA
- Audio Input Connectors: (1) Analog L+R -RCA (1) Digital Coaxial (S/PDIF), (1) Digital Optical (TOSLINK)
- Link Connector: (8) RJ-45 shielded
- Rack Size: 1U (rack-ears included)
- Power Supply: 5V DC
- Power Consumption: 40 Watts (max)
- Dimensions: 5.8"D x 17" W x 5.8"H
- Shipping Weight / Unit Weight: 1 lb /4 lbs.



EXT-COMPAUD-CAT5-148

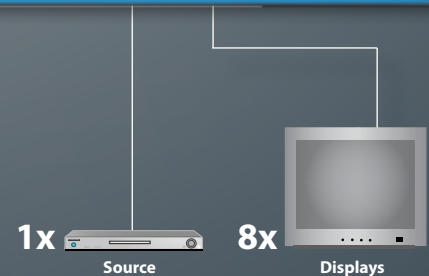

Note: Sender Unit Only
Use Receiver: [EXT-COMPAUD-RDA](#)