

SPLITTERS / DISTRIBUTION AMPLIFIERS

EXT-DVI-142DL



1:2 DVI DL /SL SPLITTER

Split one dual link or single link DVI signal to two DVI outputs



FEATURES:

- Supports resolutions up to 3840x2400
- Supports dual link or single link sources
- Plug-and-play installation
- Supports HDCP pass-through for output one
- Supports DDWG standard for DVI compliant monitors

SPECIFICATIONS:

- Maximum Pixel Clock: 2 x 165 Mhz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 3840 x 2400
- DVI Input Connector: (1) DVI-D DL 24 pin female
- DVI output Connector: (2) DVI-I 29 pin female
- Power Supply: 5V DC
- Power Consumption: 5 Watts (max)
- Dimensions: 3.2"D x 4.2" W x 1"H
- Shipping Weight / Unit Weight: 2 lbs. /1 lb

EXT-DVI-144



1:2 DVI SPLITTER

Split one single link DVI signal to two DVI outputs




FEATURES:

- Supports resolutions up to 1920x1200
- Supports single link sources
- Plug-and-play installation
- Equalization adjustment to fine tune input signal
- Supports HDCP pass-through for output one
- Supports DDWG standard for DVI compliant monitors

SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- DVI Input Connector: (1) DVI-D 19 pin female
- DVI output Connector: (2) DVI-I 29 pin female
- Power Supply: 5V DC
- Power Consumption: 10 Watts (max)
- Dimensions: 5.1"D x 4.2" W x 1"H
- Shipping Weight / Unit Weight: 3 lbs. /1 lb

EXT-DVI-144N

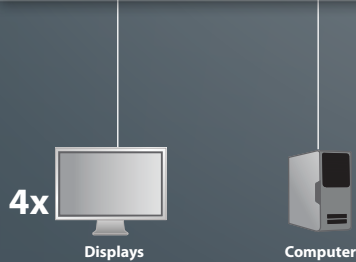

1:4 DVI SPLITTER

Split one single link DVI signal to four DVI outputs



FEATURES:

- Supports resolutions up to 1920x1200
- Supports single link sources
- Supports EDID storage
- Plug-and-play installation
- Supports DDWG standard for DVI compliant monitors

SPECIFICATIONS:

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- DVI Input Connector: (1) DVI-I 29 pin female
- DVI output Connector: (4) DVI-I 29 pin female
- Power Supply: 5V DC
- Power Consumption: 5 Watts (max)
- Dimensions: 4.2"D x 17.1" W x 1.7"H
- Shipping Weight / Unit Weight: 5 lbs. /2 lbs.