

2x2 SWITCHER FOR HDMI 1.3

Switch between two HDMI 1.3 sources to two outputs (mirrored)


Features:

- Supports compressed lossless audio formats such as Dolby Digital TrueHD and DTS-HD Master Audio
- Switch easily between any two HDMI sources
- Dual mirrored outputs
- Extends the range of HDMI compliant signals by Equalizing and reclocking the HDMI signal
- Supports resolutions up to 1080p/60, 2K and 1920x1200
- EDID selection; internal or external
- Discrete IR remote control (included)
- HDMI 1.3 compliant
- HDCP compliant




SPECIFICATIONS :

- Maximum Pixel Clock: 340 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60 12 bit color depth
- HDMI Input: (2) Type A 19 pin female
- HDMI Output: (2) Type A 19 pin female
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Power Supply: 5V DC
- Power Consumption: 10 Watts (max)
- Dimensions: 4.2"D x 12" W x 1.2"H
- Shipping Weight / Unit Weight: 9 lbs. /6 lbs.

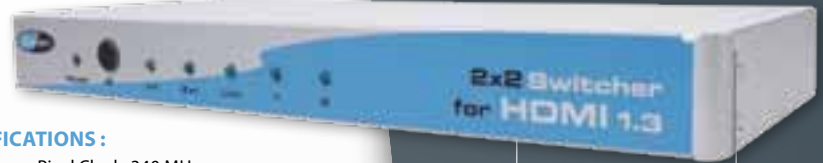

EXT-HDMI1.3-242

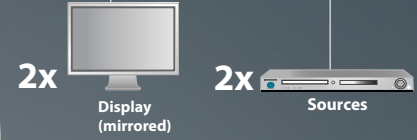

4x2 HDMI SWITCHER FOR HDMI 1.3

Switch between four HDMI 1.3 sources to two outputs (mirrored) and one digital S/PDIF

Features:

- Supports compressed lossless audio formats such as Dolby Digital TrueHD and DTS-HD Master Audio
- Dual mirrored outputs
- Digital S/PDIF audio output for connection to an external audio processor (HDMI 1.2 bitstream/LPCM formats)
- Supports resolutions up to 1080p/60, 2K and 1920x1200
- EDID selection; internal or external
- Discrete IR remote control (included)
- HDMI 1.3 compliant
- HDCP compliant




SPECIFICATIONS :

- Maximum Pixel Clock: 340 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60 12 bit color depth
- HDMI Input: (4) Type A 19 pin female
- HDMI Output: (2) Type A 19 pin female
- Digital Audio Output: (1) Coaxial (S/PDIF)
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Power Supply: 5V DC
- Power Consumption: 10 Watts (max)
- Dimensions: 4.2"D x 12" W x 1.2"H
- Shipping Weight / Unit Weight: 9 lbs. /6 lbs.



EXT-HDMI1.3-442

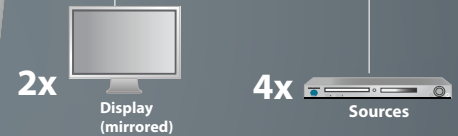

6x2 HDMI SWITCHER

Switch between six HDMI 1.2 sources to two outputs (mirrored) and one digital TOSLINK

Features:

- Switch easily between any six HDMI sources
- Extends the range of HDMI compliant signals by equalizing and reclocking the HDMI signal
- Supports resolutions up to 1080p/60, 2K and 1920x1200
- Digital TOSLINK audio output for connection to an external audio processor
- EDID modification ensures compatibility with HDMI 1.3 equipment
- Discrete IR remote control (included)
- Discrete switching via integrated RS-232 serial communications
- HDMI 1.2 compliant / HDMI 1.3 compatible
- HDCP compliant

SPECIFICATIONS :

- Maximum Pixel Clock: 165 MHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Maximum Resolution: 1080p/60, 1920x1200
- HDMI Input: (6) Type A 19 pin female
- HDMI Output: (2) Type A 19 pin female
- Digital Audio Output: (1) Optical (TOSLINK)
- Remote Control Port: (1) DB-9; RS-232 serial communication
- IR Extension Port: (1) 3.5mm mini-stereo jack
- Power Supply: 24V DC
- Power Consumption: 60 Watts (max)
- Dimensions: 5.8"D x 17" W x 1.7"H
- Shipping Weight / Unit Weight: 7 lbs. /2 lbs.



EXT-HDMI-642

