

1:2 COMPONENT WITH AUDIO SPLITTER OVER CAT5


Extend one Component video signal with audio up to 1000 feet (300 meters) with end-point video distribution to two outputs, all over one CAT-5e cable

FEATURES:

- Supports resolutions up to 1080p/60
- Maximum extension is 1000ft (300m)
- Supports analog left and right audio, multichannel digital TOSLINK or S/PDIF
- Equalizations adjustments for different CAT-5e skews
- Brightness and focus adjustments for fine tuning the output signal
- Simple plug-and-play installation
- Component video split is handled by the receiver

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Horizontal Frequency Range: 15-70 KHz
- Vertical Frequency Range: 30-170 Hz
- Video In: (3) RCA component
- Audio In: (2) RCA Audio, (1) SPDIF, (1) TOSLINK
- Video Out: (6) RCA component
- Audio Out: (4) RCA Audio, (2) SPDIF, (2) TOSLINK
- Link Connector: (1) RJ-45 Shielded
- Power Supply: 5V DC
- Power Consumption: 10 Watts (max)
- Dimensions(S): 2.6"D x 5.1" W x 1.1"H
- Dimensions(R): 4.2"D x 17.1" W x 1.2"H
- Shipping Weight / Unit Weight: 5 lbs. /2 lbs.

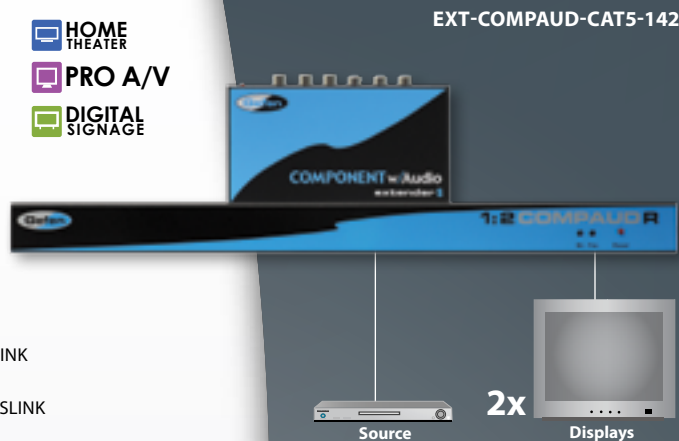

1:4 COMPONENT WITH AUDIO SPLITTER OVER CAT-5

Split one Component video signal to four component video outputs with extension of each output up to 300 feet (90 meters) over one CAT-5e cable

FEATURES:


- Supports resolutions up to 1080p/60
- Maximum extension is 1000ft (300m)
- Supports analog left and right audio, multichannel digital TOSLINK or S/PDIF
- Equalizations adjustments for different CAT-5e skews
- Brightness and focus adjustments for fine tuning the output signal
- Simple plug-and-play installation

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Horizontal Frequency Range: 15-70 KHz
- Vertical Frequency Range: 30-170 Hz
- Video In: (3) RCA component
- Audio In: (2) RCA Audio, (1) SPDIF, (1) TOSLINK
- Link Connector: (4) RJ-45 shielded
- Power Supply: 5V DC
- Power Consumption: 20 Watts (max)
- Dimensions: 4.2"D x 8.4" W x 1.6"H
- Shipping Weight / Unit Weight: 6 lbs. /2 lbs.

Note: Sender Unit Only

Use Receiver: [EXT-COMPAUD-RDA](#)

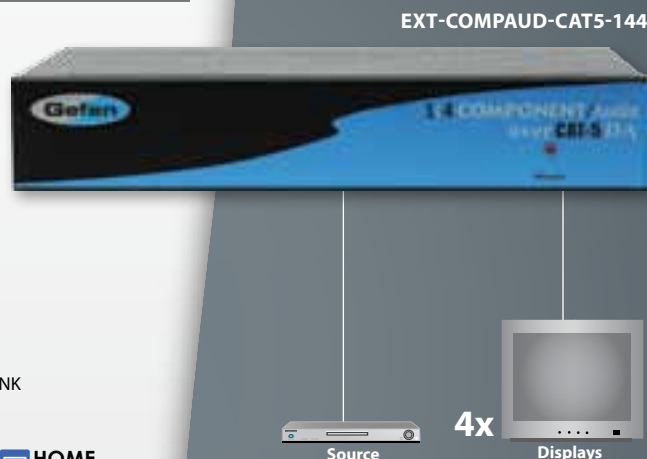

1:8 COMPONENT AUDIO OVER CAT-5 DISTRIBUTION AMPLIFIER

Split and extend one Component video signal with audio to eight outputs up to 300 feet (90 meters) over CAT-5e cable

FEATURES:

- Supports resolutions up to 1080p/60
- Maximum extension is 1000ft (300m)
- Supports analog left and right audio, multichannel digital TOSLINK or S/PDIF
- Equalizations adjustments for different CAT-5e skews
- Brightness and focus adjustments for fine tuning the output signal
- Simple plug-and-play installation

SPECIFICATIONS:

- Maximum Video Bandwidth: 350 MHz
- Input Video Signal: 1.2 Volts p-p
- Input Sync Signal: 5 Volts p-p (TTL)
- Horizontal Frequency Range: 15-70 KHz
- Vertical Frequency Range: 30-170 Hz
- Video In: (3) RCA component
- Audio In: (2) RCA audio, (1) SPDIF, (1) TOSLINK
- Link Connector: RJ-45 shielded
- Power Supply: 5V DC
- Power Consumption: 20 Watts (max)
- Dimensions: 4.2"D x 17.1" W x 1.1"H
- Shipping Weight / Unit Weight: 5 lbs. /2 lbs.

Note: Sender Unit Only

Use Receiver: [EXT-COMPAUD-RDA](#)

