


Specification: MIFAB® Series F1640 9" (229) diameter blood and water drain set consisting of two lacquered cast iron bodies with anchor flange and weepholes. One body furnished with a 9" (229) diameter lacquered cast iron adjustable top assembly and special duty ductile iron grate. The other body furnished with a solid gasketed ductile iron cover with lift ring. The top assemblies are interchangeable with either body. (For membrane floors, add Suffix -C for the membrane clamp).

Function: Used in packing house slaughtering areas. The slotted grate drain permits drainage of blood to a separate holding tank while the gasketed covered drain adjacent is connected to the sewer. The gasketed cover is to be removed and placed into the drain holding the slotted grate during washdown and the slotted grate is to be placed into the drain previously holding the gasketed cover. This is to ensure that water used in the cleaning operation will be directed to the sewer and not to the blood storage tank.

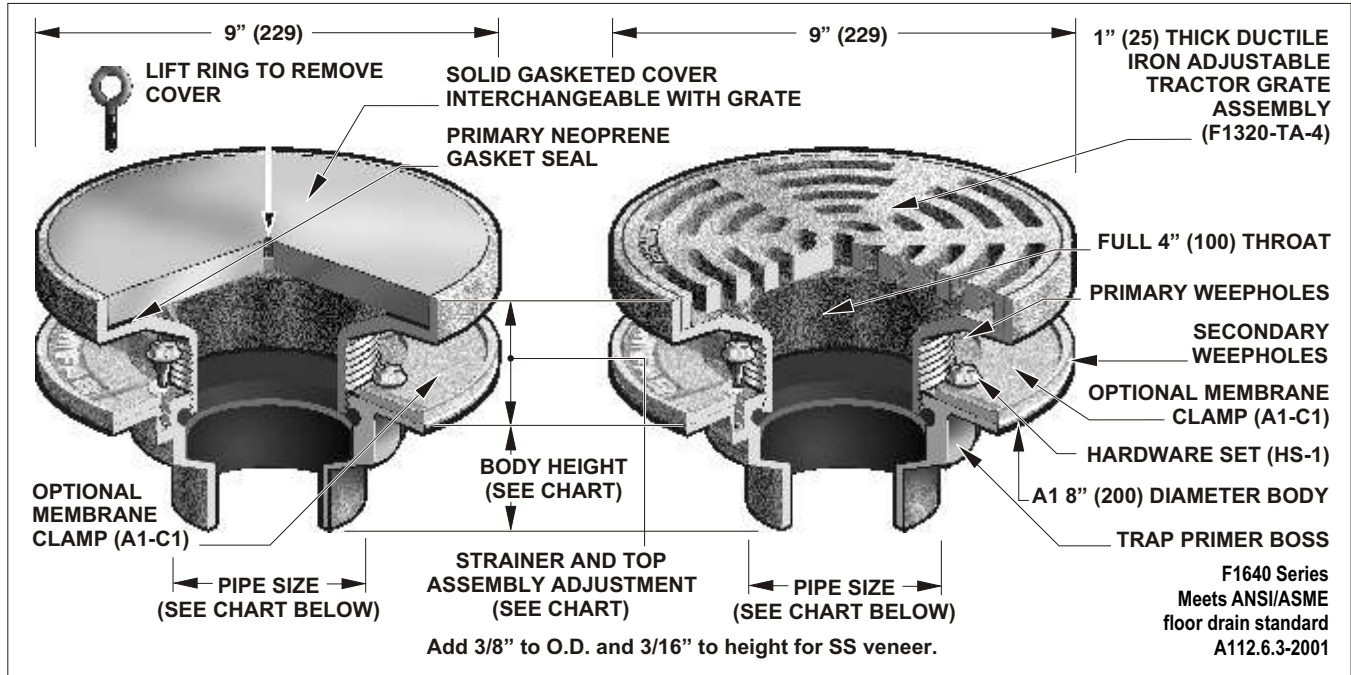

STRAINER AND TOP ASSEMBLY DIAMETER	STRAINER AND TOP ASSEMBLY ADJUSTMENT MIN MAX		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
			FREE AREA	LOAD RATING		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
				N.B. (-1), S.S. (-3), D.I. (-4)						
9" (229)	1 3/4"(45) 2 5/8"(67)	18 in ² (11,613 ²)	ANSI/ASME	2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)	
			LOAD CLASS	3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)	
			"SPECIAL DUTY" (OVER 10,000 LBS.)	4"(102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)	
			6"(152)	3 1/4" (83)	4 3/4" (121)	-	-	-	-	

OPTIONAL VARIATIONS:	SUFFIX	SUFFIX	SUFFIX
<input type="checkbox"/> Ductile iron grate and cover	(Standard)	<input type="checkbox"/> Secondary flat strainer	-21
<input type="checkbox"/> Stainless steel veneer for grate/cover	-3	<input type="checkbox"/> Bronze bodies	-27
<input type="checkbox"/> 3M epoxy finish	-3M	<input type="checkbox"/> Stainless steel bodies (Type 304)	-28
<input type="checkbox"/> Sediment bucket	-5	<input type="checkbox"/> Stainless steel bodies (Type 316)	-29
<input type="checkbox"/> Vandal proof secured grate/cover	-6	<input type="checkbox"/> PVC socket connection bodies	-30
<input type="checkbox"/> Trap seal primer connection	-7	<input type="checkbox"/> ABS socket connection bodies	-31
<input type="checkbox"/> Backwater valve	-8	<input type="checkbox"/> Closure plug	-34
<input type="checkbox"/> Acid resistant epoxy coating	-11	<input type="checkbox"/> Underdeck clamp	-40
<input type="checkbox"/> All galvanized	-13	<input type="checkbox"/> Sump receiver	-41
<input type="checkbox"/> Extension	-15	<input type="checkbox"/> Chrome plated strainer	-49
		<input type="checkbox"/> Threaded side outlets	-90
		<input type="checkbox"/> No hub side outlets	-90NH
		<input type="checkbox"/> Client logo	-95
		<input type="checkbox"/> No hub outlet	(Standard)
		<input type="checkbox"/> Membrane clamp	-C
		<input type="checkbox"/> Membrane clamp for low rough-in (min. 7/8" (22))	-C1
		<input type="checkbox"/> Push on outlet	P
		<input type="checkbox"/> Threaded outlet	T
		<input type="checkbox"/> Inside caulk outlet	X
		<input type="checkbox"/> Extended wide elastomeric flange	-Z

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____