




F1650-G

FLUSHING RIM FLOOR DRAIN WITH FLUSHING CONNECTION AND DEEP SEAL TRAP

Specification: MIFAB® Series F1650-G flushing rim floor drain with white epoxy coated interior and exterior cast iron body, double wall deep seal trap with flushing connection, 3/4" (19) N.P.T. flushing connection in top assembly, anchor flange, membrane clamp, and stain finished nickel bronze hinged grate and frame with stainless steel allen key vandal proof screws.

Function: Used in hospital operating and veterinary rooms, industrial and educational laboratories where waste must be drained to the sewer. Appropriate for mental institutions, zoos and prisons as drain type water closets.

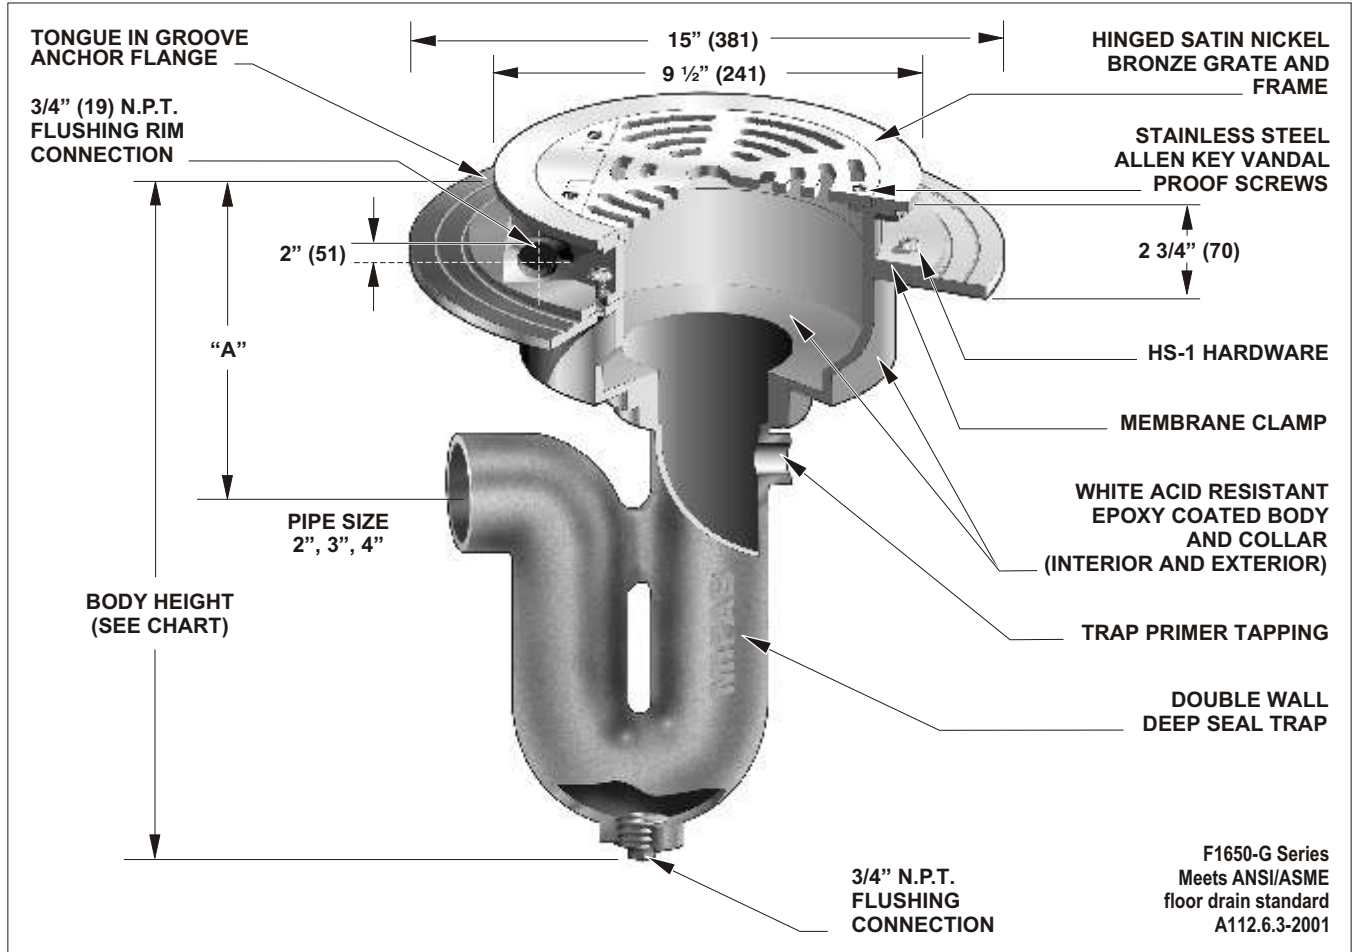

Note: See F1670 for water supply control box to be used with the flushing rim floor drain. Use a vacuum breaker between the potable water supply and the connection to the flushing rim connection (by others).

STRAINER DIAMETER	FREE AREA	ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT		
		LOAD RATING			NO HUB (STANDARD)	"A" DIMENSION THREADED OUTLET	"A" DIMENSION NO HUB OUTLET
		N.B. (-1)	SS. (-3)				
9" (229)	18 in ² (11,613 ²)	UP TO 2000 LBS.	2,000 TO 4,999 LBS.	2" (51) 3" (76) 4" (102)	20 3/4" (527) 24 1/4" (616) 25 7/8" (657)	12 5/16" (313) 13 1/2" (343) 14" (356)	12 5/16 (313) 13 1/2" (343) 14" (356)

- | | | |
|---|---|--|
| <p>OPTIONAL VARIATIONS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Nickel bronze frame and grate (Standard) <input type="checkbox"/> Stainless steel frame and grate -3 <input type="checkbox"/> 3M epoxy finish -3M <input type="checkbox"/> Sediment bucket -5 <input type="checkbox"/> Vandal proof secured grate -6 <input type="checkbox"/> All galvanized -13 <input type="checkbox"/> Secondary flat strainer -21 | <p>SUFFIX</p> <ul style="list-style-type: none"> <input type="checkbox"/> Nickel bronze hinged solid cover -25-1 <input type="checkbox"/> Bronze body -27 <input type="checkbox"/> Stainless steel body (type 304) -28 <input type="checkbox"/> Stainless steel body (type 316) -29 <input type="checkbox"/> PVC socket connection body -30 <input type="checkbox"/> ABS socket connection body -31 <input type="checkbox"/> Closure plug -34 | <p>SUFFIX</p> <ul style="list-style-type: none"> <input type="checkbox"/> Client logo -95 <input type="checkbox"/> No hub outlet (Standard) <input type="checkbox"/> Loose set grate -A <input type="checkbox"/> Push on outlet P <input type="checkbox"/> Threaded outlet T <input type="checkbox"/> Inside caulk outlet X <input type="checkbox"/> Extended wide elastomeric flange -Z |
|---|---|--|

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____