



F1620C


ISOLATION FLOOR DRAIN WITH 9" ROUND ADJUSTABLE TRACTOR GRATE

Internet address: www.mifab.com

Toll Free: 1-800-465-2736

Canada Toll Free: 1-800-387-3880

SPECIFICATION: MIFAB Series F1620C lacquered cast iron floor drain with upper and lower bodies and anchor flanges, cast iron membrane clamp rings with primary and secondary weepholes for waterproofing membrane, neoprene expansion compensator and standard 1" (25) thick, 9" (230) round, ductile iron tractor grate.

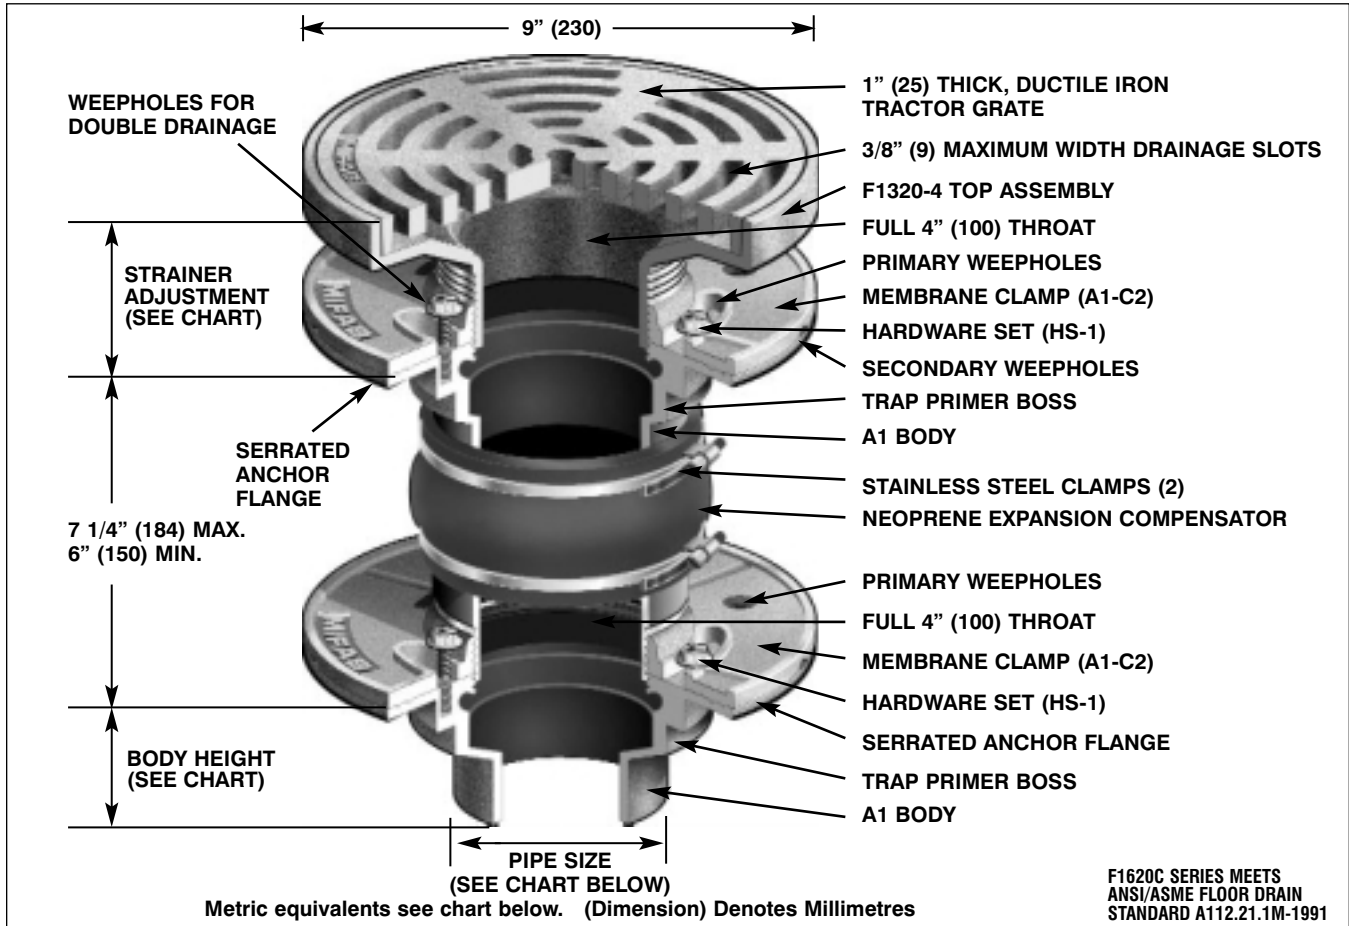

F1620C SERIES MEETS
ANSI/ASME FLOOR DRAIN
STANDARD A112.21.1M-1991

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	NO HUB	BODY HEIGHT PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)
	MIN	MAX	FREE AREA	LOAD RATING					
9" (230)	2 13/16" (71)	3 11/16" (94)	18 in ² (11,613 ^{cm})	ANSI/ASME	2" (50)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	2 3/4" (70)
				LOAD CLASS	3" (75)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	2 3/4" (70)
				"SPECIAL DUTY"	4" (100)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	2 3/4" (70)
				(OVER 10,000 LBS.)	6" (150)	3 1/4" (83)	—	2 3/4" (70)	

OPTIONAL VARIATIONS:

- Nickel bronze
- 3M epoxy finish
- Stainless steel strainer (veneer)**
- Ductile iron grate (standard)
- Sediment bucket
- Vandal proof
- Trap seal primer tapping
- Backwater valve
- Acid resistant epoxy coating
- Galvanized top assembly
- All galvanized
- Non tilt grate
- Extension
- Square top
- Bronze body
- Stainless steel body (type 304)
- Stainless steel body (type 316)

- suffix -1
- suffix -3M
- suffix -3**
- suffix -4
- suffix -5
- suffix -6
- suffix -7
- suffix -8
- suffix -11
- suffix -12
- suffix -13
- suffix -14
- suffix -15
- suffix -16
- suffix -27
- suffix -28
- suffix -29

- PVC socket connection body
- ABS socket connection body
- Closure plug
- Deck clamp
- Sump receiver
- Lacquered cast iron funnels
- Threaded side outlet
- Client logo
- Clamp ring for low rough-in (min. 1 3/4" (45))
- 4" Round funnel
- 6" Round funnel
- Oval 4" x 9" funnel
- 6" x 3" x 1" funnel
- Push on outlet
- Threaded outlet
- Inside caulk outlet
- Non adjustable top
- Elastomeric flange

- suffix -30**
- suffix -31**
- suffix -34
- suffix -40
- suffix -41
- suffix -50
- suffix -90
- suffix -95
- suffix C1
- suffix -F4
- suffix -F6
- suffix -G
- suffix -J
- suffix P
- suffix T
- suffix X
- suffix -Y
- suffix -Z