


High Resolution Video to VGA Converter

- Input: allows composite video output to be viewed on a VGA monitor (CRT or LCD)
- Dual output: BNC x 1 for TV monitor and DB15 x 1 for VGA monitor
- High resolution VGA display up to 1280 x 1024 @60Hz
- Frequency output: 59Hz to 85Hz
- On screen display function: Hue, Brightness, Contrast, Saturation
- OSD video control • Compact size and low working temperature

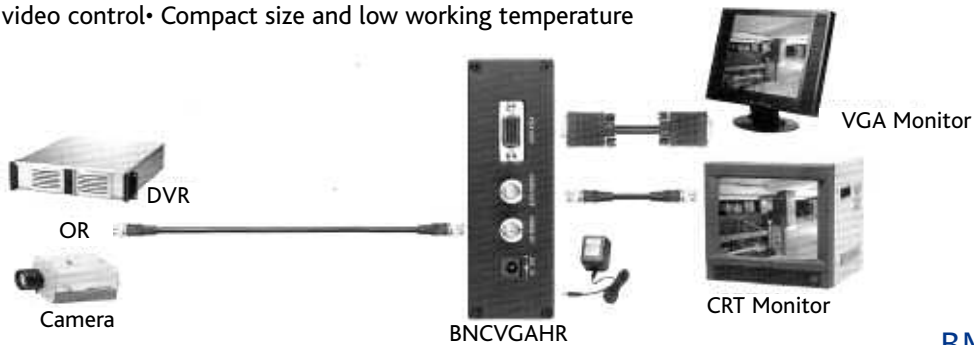

BNCVGAHR

Audio CAT5 Extender and Ground Loop Device

- Gold-plated RCA female to RJ45
- Used in pairs via one CAT5 UTP cable to send audio signal of up to 1 mile
- 20Hz to 20kHz bandwidth
- Available for 75 – 120 ohm cable
- High performance to eliminate audio ground loop problem
- No power required
- Sold in Pairs



UTPAUDIO

Hi Impedance Line Level Universal Mic

- Add-on mini microphone for all systems
- High sensitivity microphone with 1.5 ft. power/audio cable
- Easy to install and ideal for all security surveillance audio recording applications
- Line level output



CAMMIC