




Wiha Insulated Hex L-keys

Insulation Test Standards:
Insulation according to ASTM,
F1505-01, EN/IEC 60900

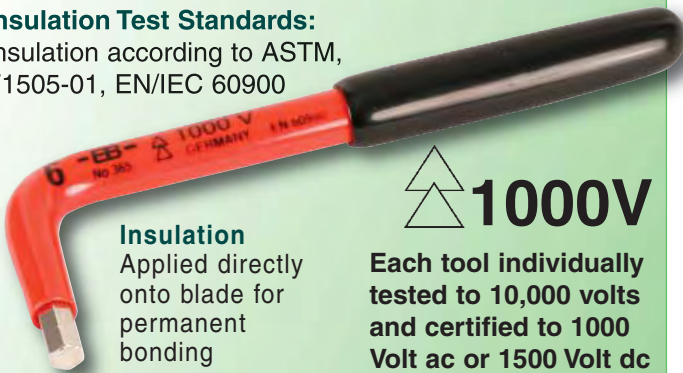

1000V

Insulation
Applied directly
onto blade for
permanent
bonding

**Each tool individually
tested to 10,000 volts
and certified to 1000
Volt ac or 1500 Volt dc**



1000Volt

136 Inch Insulated Hex L-keys, With Insulated Handle

Insulation According to IEC 60900 specification, up to 1000 Volt.
Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Ø _{MM} Inch	OAL mm	OAL Inch	↕ lbs.	⊞ pkg.
136 63	1/8	104	4.1	.04	1
136 65	5/32	104	4.1	.05	1
136 66	3/16	134	5.3	.10	1
136 67	7/32	134	5.3	.12	1
136 68	1/4	134	5.3	.14	1
136 69	5/16	144	5.7	.24	1
136 62	3/8	234	9.2	.51	1
136 64	1/2	234	9.2	.77	1



1000Volt

136 90 Set 8 Pcs. Insulated Inch Hex L-keys

Item No.	Ø _{MM} Inch	OAL Inch	↕ lbs.	
136 90	136 63	1/8 4.1	136 68	1/4 5.3
	136 65	5/32 4.1	136 69	5/16 5.7
	136 66	3/16 5.3	136 62	3/8 9.2
	136 67	7/32 5.3	136 64	1/2 9.2



1000Volt

136 Metric Insulated Hex L-keys, With Insulated Handle

Insulation According to IEC 60900 specification, up to 1000 Volt.
Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Ø _{MM} mm	OAL mm	OAL Inch	↕ lbs.	⊞ pkg.
136 53	3	130	5.1	.04	1
136 54	4	120	4.7	.06	1
136 55	5	140	5.5	.10	1
136 56	6	140	5.5	.13	1
136 58	8	150	5.9	.24	1
136 59	10	220	8.7	.51	1
136 57	12	260	10.2	.77	1



1000Volt

136 91 Set 7 Pcs. Insulated Metric Hex L-keys

Item No.	Ø _{MM} mm	OAL mm	↕ lbs.	
136 91	136 53	3 130	136 58	8 150
	136 54	4 120	136 59	10 220
	136 55	5 140	136 57	12 260
	136 56	6 140		