




**Wiha Insulated Open-Ended Spanners**

**Insulation Test Standards:**

Insulation according to ASTM F1505-01, EN/IEC 60900, VDE 0680, DIN 7446

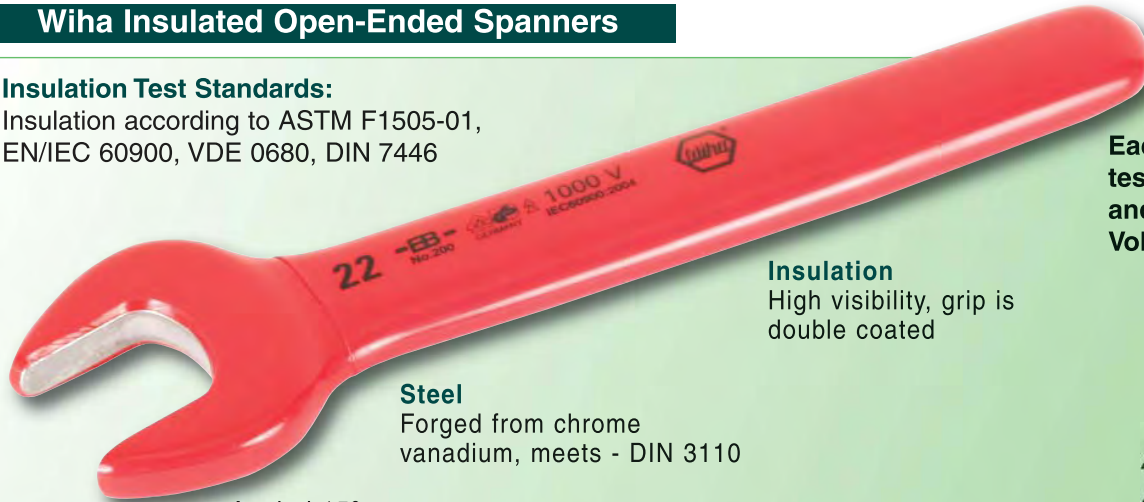

Each tool individually tested to 10,000 volts and certified to 1000 Volt ac or 1500 Volt dc

**Insulation**  
High visibility, grip is double coated

**Steel**  
Forged from chrome vanadium, meets - DIN 3110

Angled 15°



1000Volt

**201 Inch Open-Ended Spanners, With Insulated Handle**

Insulation According to VDE Specification 0680 and EN/IEC 60900, DIN 7446, up to 1000 Volt. Individually Tested. Chrome-vanadium steel, hardened. Angled 15°.

Item No.	ØMM Inch	OAL mm	OAL Inch	⚡ lbs.	📦 pkg.
201 33	5/16	100	3.9	.05	1
201 35	3/8	105	4.1	.07	1
201 36	7/16	117	4.6	.09	1
201 37	1/2	140	5.5	.15	1
201 38	9/16	146	5.7	.15	1
201 40	5/8	158	6.2	.20	1
201 41	11/16	165	6.5	.23	1
201 42	3/4	178	7.0	.33	1
201 44	13/16	191	7.5	.42	1
201 45	7/8	192	7.6	.44	1
201 46	15/16	201	7.9	.51	1
201 47	1	213	8.4	.61	1
201 48	1-1/16	233	9.2	.79	1
201 49	1-1/8	233	9.2	.77	1

\* Lengths are +/- 5% due to coating process



1000Volt

**201 90 Set 14 Pcs. Insulated Inch Open End Insulated Spanners**

Item No.	ØMM Inch	OAL Inch	⚡ lbs.	Item No.	ØMM Inch	OAL Inch	⚡ lbs.
201 90	201 33	5/16	3.9	201 42	3/4	7.0	3.0
	201 35	3/8	4.1	201 44	13/16	7.5	
	201 36	7/16	4.6	201 45	7/8	7.6	
	201 37	1/2	5.5	201 46	15/16	7.9	
	201 38	9/16	5.7	201 47	1	8.4	
	201 40	5/8	6.2	201 48	1-1/16	9.2	
	201 41	11/16	6.5	201 49	1-1/8	9.1	



1000Volt

**201 92 Set 8 Pcs. Insulated Inch Open End Insulated Spanners**

Item No.	ØMM Inch	OAL Inch	⚡ lbs.	Item No.	ØMM Inch	OAL Inch	⚡ lbs.
201 92	201 33	5/16	3.9	201 38	9/16	5.7	1.4
	201 35	3/8	4.1	201 40	5/8	6.2	
	201 36	7/16	4.6	201 41	11/16	6.5	
	201 37	1/2	5.5	201 42	3/4	7.0	