




# Sierra Pro XL 1632 Video Series Reverse Matrix

16 x 32 wideband video routing switcher

SIERRA PRO XL

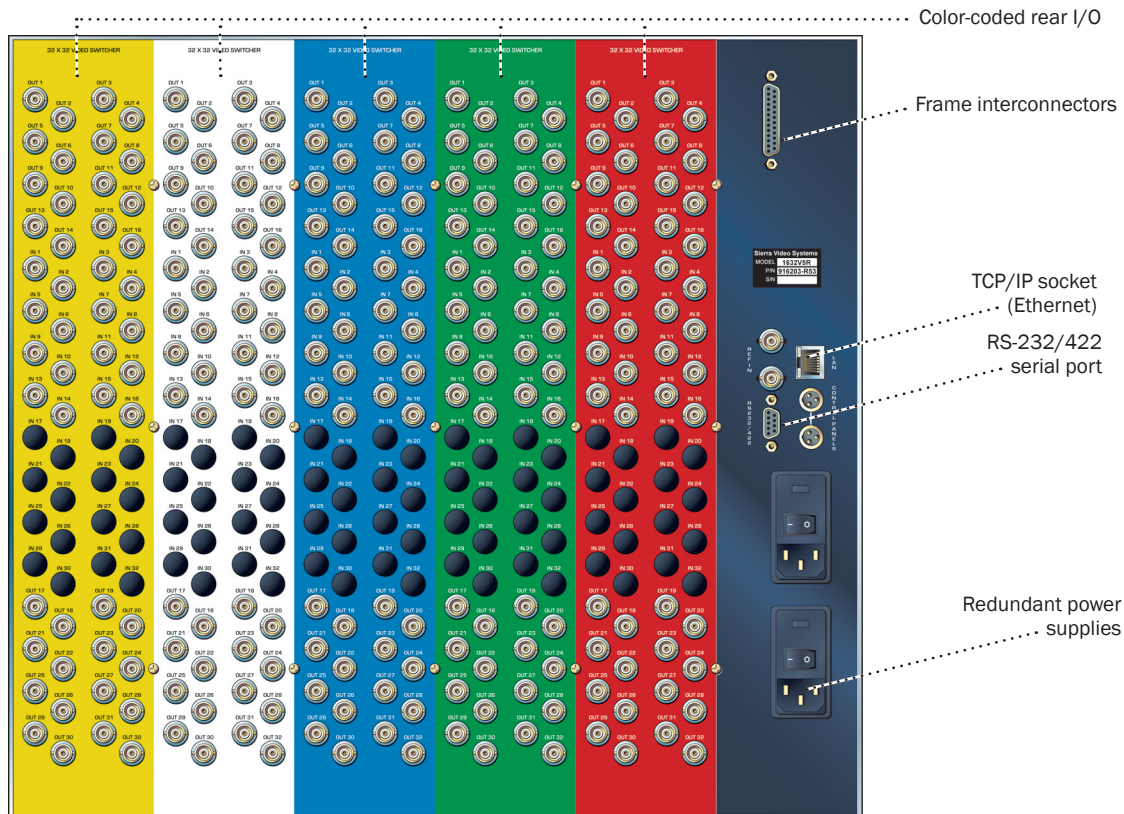

### Sierra Pro 1632V5xl

16 x 32 five-channel 450MHz at -3dB wideband video routing switcher




#### Optional Configurations:

Sierra Pro 1632V3xl – 16 x 32 three-channel 450MHz at -3dB wideband video

- Redundant power supply is standard on the 1632 Series frames.
- Custom 4-level or 5-level Video optional at additional cost. To order, specify “V4V” or “V5V” option – i.e. 1632V5Vxl

#### Features:

The Sierra Pro XL 1632 Video Series is depopulated from the Sierra Pro XL 3232 Video Series and is designed specifically for display environments requiring a small number of inputs (sources) and a larger number of outputs (destinations) such as classrooms, worship facilities, or hospitality venues such as sports bars. The routing switcher comes in a 9RU (15.75”) frame and allows control of multiple signal types including composite, s-Video, YUV, RGBHV, Y/C, and analog HD. Breakaway split routing accommodates RGB muting for enhanced performance with projectors and displays. IP control, RS-232 serial control and a front local control panel are standard. Companion stereo audio is available with the Sierra Pro 1632Sxl (see page 30). Redundant power supply is standard in this frame.

-  Companion Stereo Audio Page 30
-  Control Page 117
-  Specifications Page 31