




Sierra Pro XL 3232 Video Series

32 x 32 wideband video routing switcher

SIERRA PRO XL

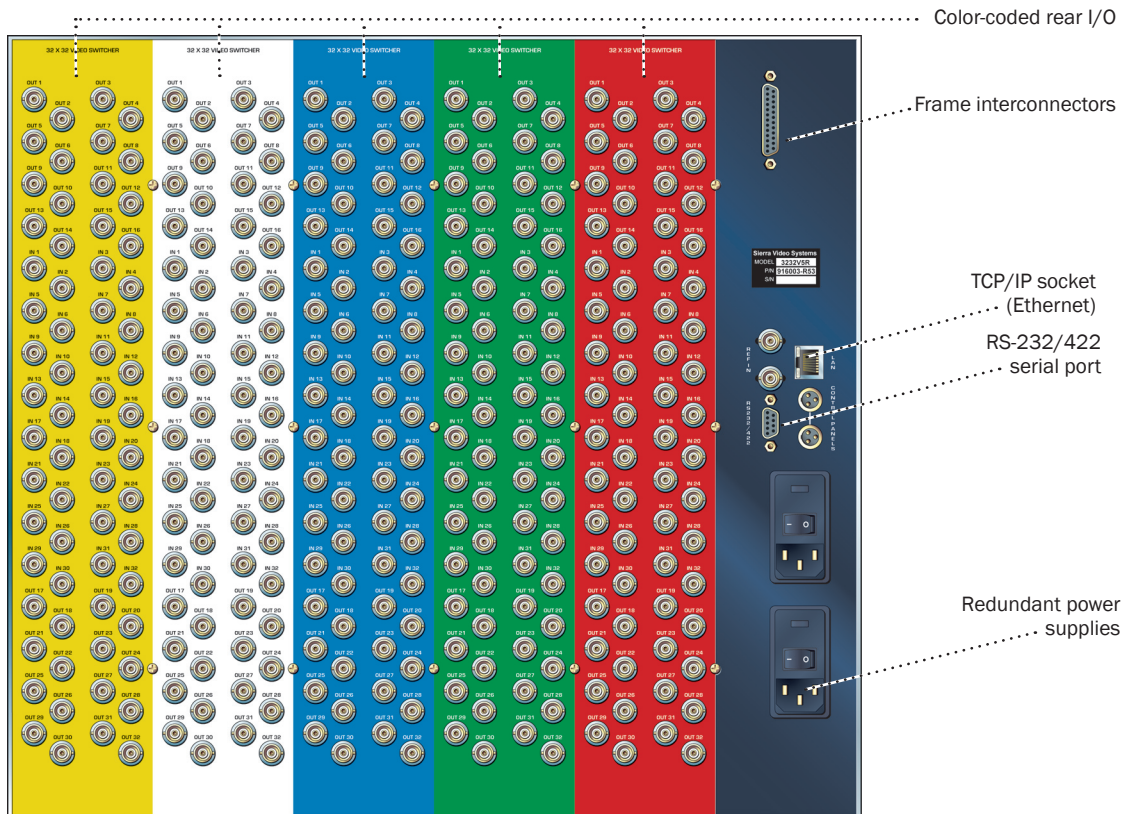

Sierra Pro 3232V5xl

32 x 32 five-channel 450MHz at -3dB wideband video routing switcher

Optional Configurations:

Sierra Pro 3232V4xl – 32 x 32 three-channel 450MHz at -3dB wideband, one-channel pulse




Sierra Pro 3232V3xl – 32 x 32 three-channel 450MHz at -3dB wideband

Sierra Pro 3232V2xl – 32 x 32 two-channel 450MHz at -3dB wideband

- Redundant power supply is standard on all 32 Series frames.
- Custom 4-level or 5-level Video optional at additional cost. To order, specify “V4V” or “V5V” option – i.e. 3216V5Vxl

Features:

The Sierra Pro XL 3232 Video Series is perfect for larger installations where more than 16 outputs are needed. The 3232 Series is housed in a 9RU (15.75”) frame and allows control of multiple signal types including composite, s-Video, YUV, RGBS, RGBHV, Y/C, and analog HD. Breakaway split routing accommodates RGB muting for enhanced performance with projectors and displays. IP control, RS-232 serial control and a front local control panel are standard. Companion stereo audio is available with the Sierra Pro 3232Sxl (see page 30). Redundant power supply is standard in this frame.

-  Companion Stereo Audio Page 30
-  Control Page 117
-  Specifications Page 31