




F1100-C-T


FLOOR DRAIN WITH SPANNER WRENCH COVER FOR MEMBRANE FLOOR AREAS

Specification: MIFAB® Series F1100-C-T(*)-3 (* specify strainer diameter) lacquered cast iron floor drain with anchor flange, cast iron membrane clamp with primary and secondary weepholes for waterproofing membrane and heavy duty, solid, gas tight, spanner wrench, vandal proof, stainless steel cover for secure access. (For non-membrane floors, delete -C from Series number).


Function: Used in membrane finished areas where irregular drain use is required. Solid, gas tight, spanner wrench, vandal proof, stainless steel cover ensures secure access. Used for all types of poured finished floors. Secondary stainless steel strainer will not dish or corrode and is foot friendly.

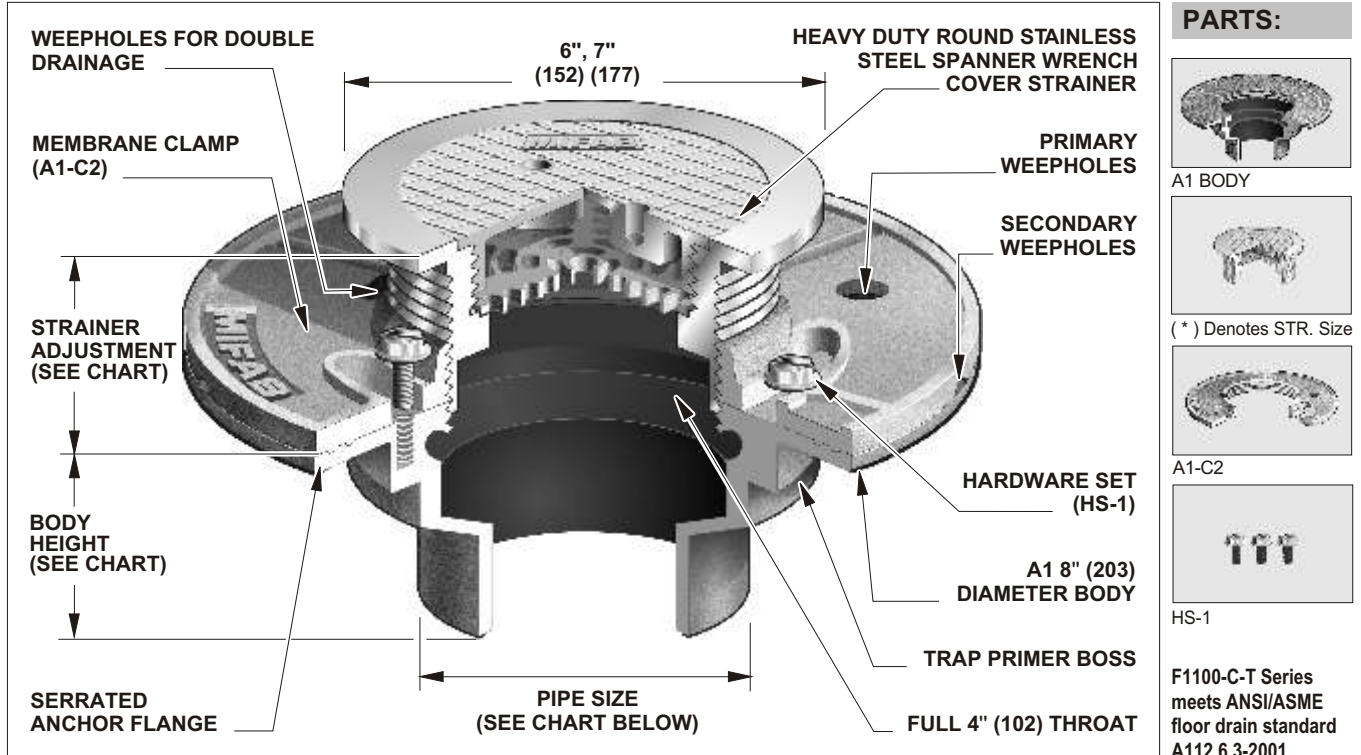


PARTS:




A1 BODY



(*) Denotes STR. Size



A1-C2



HS-1

F1100-C-T Series meets ANSI/ASME floor drain standard A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING LBS. S.S. (-3)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
6" (152)	1 11/16" (43)	2 5/8" (68)	8 in ² (5200 ²)	5000 to 7499	2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
7" (177)	1 1/2" (38)	2 5/8" (67)	12 in ² (7700 ²)	5000 to 7499	3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					4" (102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	2 3/4" (70)	—	2 5/8" (67)	3 3/4" (95)	—
					6" (152)	3 1/4" (83)	4 3/4" (121)	—	—	—

OPTIONAL VARIATIONS:	SUFFIX	<input type="checkbox"/>	SUFFIX	<input type="checkbox"/>	SUFFIX	<input type="checkbox"/>
<input type="checkbox"/> Stainless steel strainer (standard.)	-3	<input type="checkbox"/>	<input type="checkbox"/> Stainless steel body (type 304)	-28	<input type="checkbox"/> Clamp ring for low rough-in (min. 1/2" (13))	-C1
<input type="checkbox"/> 3M epoxy finish	-3M	<input type="checkbox"/>	<input type="checkbox"/> Stainless steel body (type 316)	-29	<input type="checkbox"/> 4" Round funnel	-F4
<input type="checkbox"/> Sediment bucket	-5	<input type="checkbox"/>	<input type="checkbox"/> PVC socket connection body	-30	<input type="checkbox"/> 6" Round funnel	-F6
<input type="checkbox"/> Security screws (T-20 torx & pin)	-6	<input type="checkbox"/>	<input type="checkbox"/> ABS socket connection body	-31	<input type="checkbox"/> Oval 4" x 9" funnel	-G
<input type="checkbox"/> Trap seal primer tapping	-7	<input type="checkbox"/>	<input type="checkbox"/> Closure plug	-34	<input type="checkbox"/> 6" x 3" x 1" funnel	-J
<input type="checkbox"/> Backwater valve	-8	<input type="checkbox"/>	<input type="checkbox"/> Underdeck clamp	-40	<input type="checkbox"/> No hub outlet	(Standard)
<input type="checkbox"/> Acid resistant epoxy coating	-11	<input type="checkbox"/>	<input type="checkbox"/> Sump receiver	-41	<input type="checkbox"/> Push on outlet (2", 3", 4")	P
<input type="checkbox"/> All galvanized	-13	<input type="checkbox"/>	<input type="checkbox"/> Chrome plated strainer assembly	-49	<input type="checkbox"/> Threaded outlet (2", 3", 4")	T
<input type="checkbox"/> Extension	-15	<input type="checkbox"/>	<input type="checkbox"/> Threaded side outlet	-90	<input type="checkbox"/> Inside caulk outlet (2", 3", 4")	X
<input type="checkbox"/> Secondary flat strainer	-21	<input type="checkbox"/>	<input type="checkbox"/> Client logo	-95	<input type="checkbox"/> Extended wide elastomeric flange	-Z
<input type="checkbox"/> Bronze body	-27					

Job Name _____	Page No: _____
Section No: _____	Contractor _____
Schedule No: _____	Purchase Order No: _____