
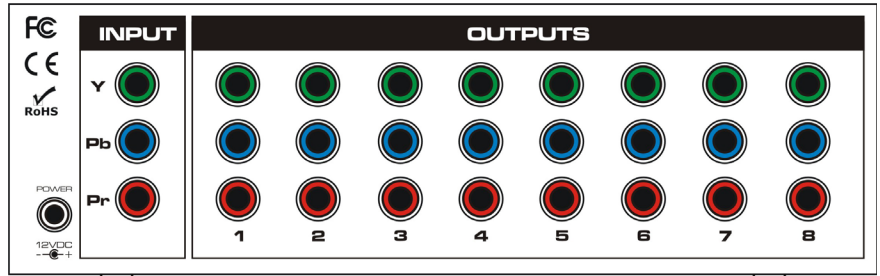


The Intelix HDDA-8-F is an affordable 1 input by 8 output high-definition component video (YPbPr) distribution amplifier.

Ideal for whole home audio/video, restaurant and bar, transportation, and commercial audio/video applications, the HDDA-8-F features female RCA connectors and supports high-definition 1080i/1080p resolutions. Multiple HDDA-8-F amplifiers may be linked when more than eight outputs are required.

In addition to component video, the HDDA-8-F supports composite video, Y/C video, and professional-level 20 Hz to 20 kHz stereo audio. The HDDA-8-F is compatible with Intelix audio/video over Cat 5 baluns.

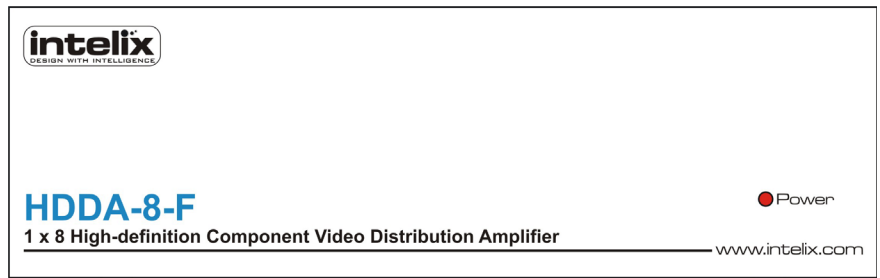

## Specifications

<b>Voltage Requirement</b>	12 VDC
<b>Power</b>	DC
<b>Current Requirement</b>	500 mA maximum
<b>Input Connectors</b>	Three (3) female RCA (1 YPbPr)
<b>Output Connectors</b>	Twenty-four (24) female RCA (8 YPbPr)
<b>Maximum Output Range (without a secondary balun)</b>	150 feet
<b>Maximum Output Range (with a secondary balun)</b>	Dependant on the balun's distance limitations
<b>High-Definition Compatible</b>	1080i, 1080p, 720p, 480i, 480p compatible
<b>Signal Bandwidth</b>	300 MHz
<b>Audio Frequency Response</b>	20 Hz to 20 kHz
<b>Audio Crosstalk</b>	Better than -65 dB
<b>Shipping Weight</b>	2 lbs.
<b>Enclosure</b>	Black metal
<b>Dimensions</b>	7.75" x 2.40" x 2.40"
<b>Intelix Part Number</b>	HDDA-8-F
<b>Linkable</b>	Yes*
<b>Diagnostic</b>	Red power LED on front panel
<b>Included Accessories</b>	(1) 12 VDC power supply
<b>Regulatory</b>	CE, FCC, RoHS, UL
<b>Warranty</b>	2 years

## Features

- 300 MHz bandwidth
- Supports 1080i and 1080p HD signals
- Linkable
- Ultra compact size
- Rugged metal housing
- Composite video, Y/C video, and analog audio compatible



\*Intelix recommends linking a maximum of five units with the units no more than 30 feet apart.