

Four windows and background

**DVI, RGB, HDTV, S-Video,
NTSC/PAL inputs**

**Sixteen input multi-format video
switcher**

Smoothly scalable windows

Ethernet and USB control

Pan and zoom

Variable aspect ratio

10 bit pixel processing

Color backgrounds

Compact 1 RU chassis

RGB and DVI outputs

Titles and borders

Fifty programmable presets

KvM option

**Resolutions to 1920 x 1200p
and 2048 x 1080p**

On-screen cursor control

NTP clock option

COMPUTER AND VIDEO SOURCES ON A SINGLE SCREEN

QUADVIEW HD

4 Window Real Time Display Processor

The QuadView® HD offers the most powerful image processing available in a multi-viewer, with outstanding image quality, plus a web based control, dynamic window sizing, borders and titling, smooth zoom/pans and more. The QuadView HD is ideal for any application requiring display of multiple images on a monitor or projector.

The QuadView HD accepts high resolution DVI, RGB, HDTV, S-Video, component and NTSC/PAL composite video. Up to twenty four sources can be connected, four of which can be displayed simultaneously. The QuadView HD offers the highest quality graphics and HDTV rendition, with state-of-the-art deinterlacing and scaling. Picture quality sets a new standard for the industry.

An agile video switcher accepts up to sixteen video inputs, user configurable as sixteen composite, eight S-Video or five component video inputs, in any combination. Up to sixteen video inputs can be cycled through a single window with user selected timing.

The QuadView HD supports real time, dynamic movement and resizing of windows. Each input can be scaled and positioned anywhere on the screen, as well as panned and zoomed to emphasize areas of interest. Display alternatives are virtually infinite, and include quad split, side-by-side, picture-in-picture, and overlapping windows.

User-selectable output resolutions of up to 1920 x 1200p and up to 2048 x 1080p ensure a perfect match with any display. With DVI inputs and outputs, a completely digital signal path can be maintained from signal source to display.

Two exciting new display options are offered. The Background Video Option includes a package of capabilities, including an on-screen digital clock, logo or other foreground graphic, a live background or static backgrounds loaded over the Ethernet. A second option offers KVM capability to provide control of any computer or network controllable device displayed. Best yet, KvM is RGB Spectrum's patent pending implementation of traditional KVM, with full bandwidth video directly connected to the processor; only control signals are passed over the network. This implementation guarantees real time video performance, unavailable in other systems.

All functions are easily set up and controlled using a command line interface from either the USB or Ethernet ports, or graphically via a standard web-browser.

Built on RGB Spectrum's long tradition of quality and reliability, the QuadView HD is an excellent solution for all multimedia display, including the most demanding mission critical applications. And, it's available in a space saving 1 RU enclosure.

Specifications

May 2008
 Specifications subject to change without notice
 Made in the USA ©2008 RGB Spectrum

Input Signals

Type / Number	4 x RGB/HDTV (Y P _b P _r) 4 x DVI 1 x DVI optional background input Up to 16 x Composite Video, also configurable as up to 8 x S-Video or up to 5 x Component
Resolution	640 x 480 to 1920 x 1200 and 2048 x 1080p 720p, 1080i, 1080p HDTV
Horizontal scan rate	12 kHz to 125 kHz interlaced or non-interlaced
Frame rate	Up to 100 Hz
Video levels	0.7 V p-p
Sync type	Sync on green, tri-level sync (HD), separate composite sync, or separate H-drive and V-drive
Connectors	15-pin HD D-Sub (female) RGB 29-pin DVI-I DVI BNC (female) Video



Output Signals

Type / Number	1 x RGB/HDTV (Y P _b P _r) analog or 1 x DVI digital
Resolution	640 x 480 to 1920 x 1200 pixels and 2048 x 1080p
Horizontal scan rate	12 kHz to 125 kHz
Frame rate	Up to 100 Hz
Video levels	0.7 V p-p
Sync type	Sync on green, tri-level (HD only), separate composite sync, or separate H-drive and V-drive
Connectors	29 pin DVI-I - DVI/RGB/HDTV (Y P _b P _r)

Other

Power	100 - 240 VAC auto ranging 50 Hz - 60 Hz Less than 45 W
Control	Ethernet 10 / 100 BASE-T USB - B
Size	1 RU Width 17.00" (43.2 cm) Depth 13.5" (40.1 cm) Height 1.75" (4.5 cm)
Rackmount kit	Included
Weight	Approximately 13.5 lbs. (6.8 kg.)

Tactical Operations Centers


Control Rooms

Network Operations Centers

Naval & Airborne Consoles

Video Teleconferencing


Security/Surveillance

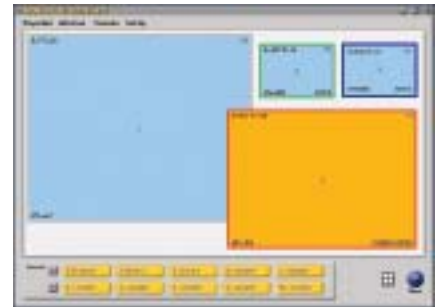

QuadView HD Web Interface

Operate the processor's display capabilities remotely from any web browser.

Corporate Headquarters
 950 Marina Village Parkway
 Alameda, California 94501
 TEL: (510) 814-7000
 FAX: (510) 814-7026
 WEB: www.rgb.com
 e-mail: sales@rgb.com



Front and Rear Panels with optional Background input

