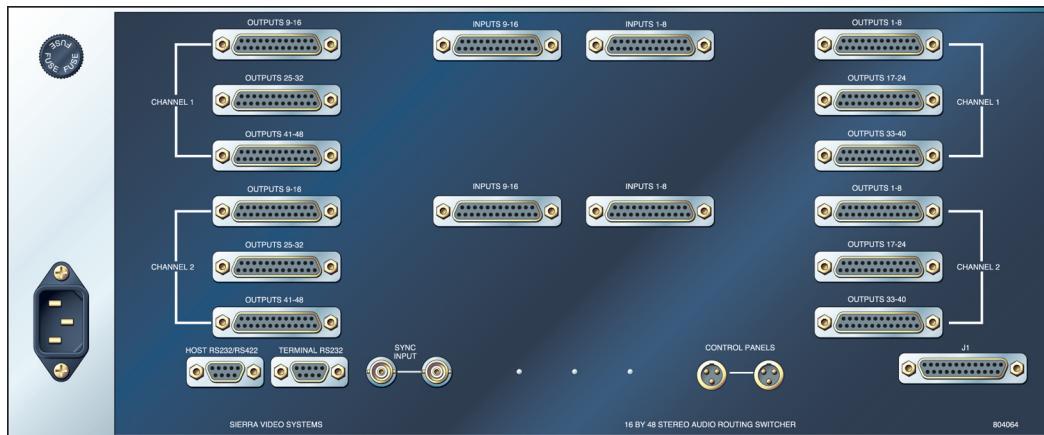



**TAHOE™ 1648AA**  
16 x 48 two-channel audio routing switcher

**Tahoe 1632AA**
**16 x 32 two-channel audio routing switcher**

|                                      |        |
|--------------------------------------|--------|
| 1 - Tahoe 1648AA Frame               | 804064 |
| 1 - serial control module            | 504001 |
| 4 - 16 x 16 audio crosspoint modules | 504045 |

**Tahoe 1648AA**
**16 x 48 two-channel audio routing switcher**

|                                      |        |
|--------------------------------------|--------|
| 1 - Tahoe 1648AA Frame               | 804064 |
| 1 - serial control module            | 504001 |
| 6 - 16 x 16 audio crosspoint modules | 504045 |

**Optional Configurations:**

Tahoe 1632A

Tahoe 1648A

**Options for 1648AA Systems:**

Redundant power supply, 115 VAC ± 10%

Substitute frame 804064-31

Redundant power supply, 230 VAC ± 10%

Substitute frame 804064-32

RS-422 host serial interface in lieu of RS-232

Specify when ordering

**Features:**

This 4RU (7") frame supports up to six 16 x 16 audio crosspoint modules, making the 1648AA a great choice for single/dual channel or stereo audio applications. An RS-232 serial interface 3-port control system module enables control from a host computer. The 1648AA supports up to 64 control panels using our Tahoe control system.



Control



Specifications

Page 117

Page 85



TAHOE