


ActiveLinx™ USB Plates

Our USB module allows the PC and the USB device to be placed up to 180 feet apart. In-wall cables are CAT5e, either plenum or non-plenum. The devices are powered from

the USB port so no external power is needed. Both a LEX (at the PC) and a REX (at the USB device) are required. No configuration is required.

USB Application Diagram:

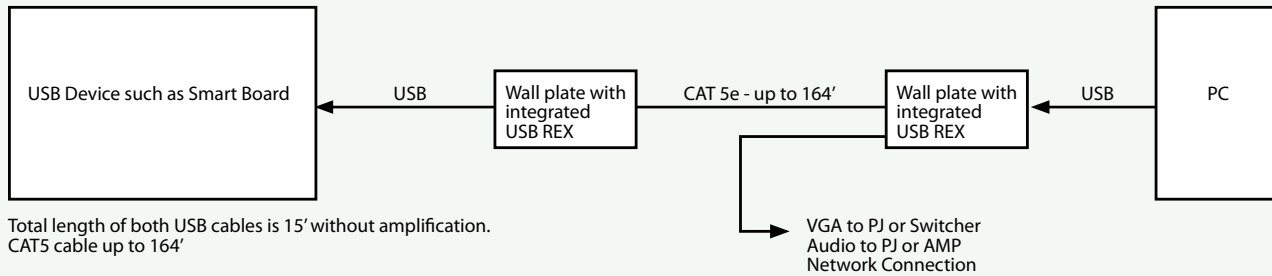

- Available in three- & four-gang plate configurations.
- Our USB Active Device extends the range of USB up to 164 ft. using Category 5 Cable. Requires no external power adapter.
- Transmits power and data over the same Category 5 cable.
- System includes local and remote units, USB cable and user guide.

Front View



Back View

SPECIFICATIONS ACTIVELINX™ USB PLATES:	
Range (over Category 5 UTP cable)50 meters (165 ft)
USB device ports (at REX)1
USB device support (connected directly to REX) Any full-speed (12 Mb/s) or low-speed (1.5 Mb/s) device
USB hub support Up to 3 hubs can be connected in series.
Maximum power available to USB at REX 300 mA when LEX is supplied with 500 mA; 600 mA when LEX is supplied with 1000 mA
USB cable2 meters (6.6 ft)
LEX connector (upstream) 1 x USB Type B
LEX connector (downstream)	... 1 x RJ-45
REX connector (upstream) 1 x RJ-45
REX connector (downstream)	... 1 x USB Type A
LEX dimensions 100 mm x 70 mm x 30 mm (4.0" x 2.8" x 1.2")
LEX weight0.1 kg (0.2 lb)
REX dimensions 100 mm x 70 mm x 30 mm (4.0" x 2.8" x 1.2")
REX weight0.1 kg (0.2 lb)
Temperature range4°C to 40°C
Regulatory testingFCC, CE Class B

Specifications Subject to Change

PERFORMANCE, SELECTION, VALUE ORDER TODAY! **800-530-8998**

ACTIVELINX™ PLATES & PANELS