

Mobile Projector. Superior Performance.



Latest DLP® Technology with 3200 Lumens of Superior Brightness

The D732MX projector features Texas Instruments DLP® technology, 3200 lumens of brightness for effective presenting even in lighted environment, and 2100:1 contrast ratio for crisp image details, all in a 7.3 lbs package. This projector is a brand new design with a hand grip that allows you to carry the projector comfortably. Also, this XGA (1024 x 768) projector carries the industry's very first 5-Year DLP® chip warranty. The projector comes with Vivitek's 3-Year parts and labor warranty, and amazing 1-Year lamp warranty.

Filter-Free Design

No filter require, resistant to dust and dirt, no clogged filters. Reduced maintenance fees, low total cost of ownership.

Convenient Lamp Replacement Design

With normally placed or ceiling mounted, the D732MX comes with a special top loading lamp replacement design that allows you to change the lamp instantly. This unique design delivers the most convenient and easiest method for lamp replacement.



Auto-Input Search

D732MX has a built-in password authentication system, which can increase the security and further assist you to prevent unauthorized usage of the projector.

Off and Go Feature

D732MX projector has a built-in aluminum alloy thermal case that enables the projector to efficiently cool itself in order to conserve the energy and prevent damage to the projector.



Turbo-Charge Light Engine

Vivitek cutting edge Turbo-Charge Light Engine delivers up to 3 types of lamp brightness modes (boost, normal, eco), enabling you to conquer various light/dark environments with suitable brightness and corresponding picture performance. The raw extra power of this turbo-charge light engine can further boost brightness up to 130%



Auto-Image Optimization

Smart auto image optimization function auto sizes and adjusts images for optimum picture performances, allowing you to fully concentrate on your presentations rather than time consuming manual adjustments.

Auto-Power Saving

The D732MX can be automatically shut-off when the projector idles for 10 minutes without any signal source inputs.

D732MX


Mobile XGA DLP® Projector



SPECIFICATIONS

MODEL	D732MX
DISPLAY TECHNOLOGY	0.7" 1-Chip DMD
RESOLUTION	XGA 1024 x 768 (Total 786,432 pixels)
BRIGHTNESS	3200 ANSI Lumens
CONTRAST RATIO	2100:1 (on/off)
ZOOM & FOCUS	Manual Zoom & Manual Focus
LENS THROW RATIO	1.8 - 2.1
PROJECTION SCREEN SIZE	23.4" - 273.4"
COLOR WHEEL	5 Segments (R, G, B, W, Y)
LAMP LIFE	180W (Shut Off Time: 4,000 hrs) with Eco-Mode
ASPECT RATIO	Native (4:3) & Compatibility (16:9)
PC COMPATIBILITY	VGA, SVGA, XGA, SXGA, Macintosh
VIDEO COMPATIBILITY	NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM, 480i/480p/720p/1080i
PC INPUT TERMINALS	DVI-D X 1, RGB X 1, S-Video x 1, Video x 1, Audio (RCA L & R) x 1, Audio (Mini Jack) x 1
OUTPUT TERMINALS	RGB x 1, Audio x 1
KEystone CORRECTION	Vertical (+/- 15 degree)
COMMUNICATION TERMINALS	USB (Service), RS-232C x 1
FAN NOISE LEVEL	30dB (Eco-Mode), 32 dB (Standard Mode)
AUDIO SPEAKER	3W Mono
DIMENSIONS (W x H x D)	11.8 x 9.6 x 3.5 inches
WEIGHT	7.3 lbs
POWER SUPPLY	AC 110-240V
POWER CONSUMPTION	Eco (200W), Standard (230W)
REPLACEMENT LAMP	1000048-A
WARRANTY	3-Year Parts and Labor, 1-Year lamp warranty, and *5-Year DLP® Chip
ACCESSORIES	AC Power cord, VGA cable, Remote Control


Screen Size and Projection Distance

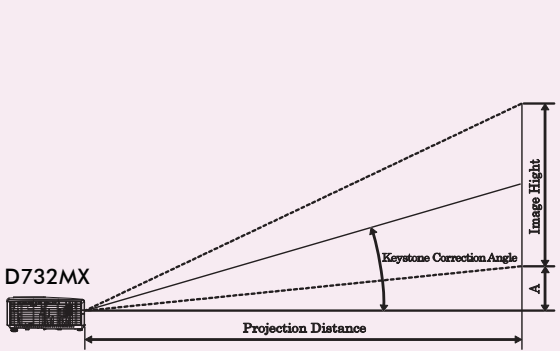

Projection Distance L	Max.Screen (Wide) 1.8			Max.Screen Size (Tele) 2.1		
	Diagonal A	Width C	Height	Diagonal	Width B	Height D
3.28'	27.34"	21.87"	16.40"	23.43"	18.75"	14.06"
4.92'	41.01"	32.81"	24.61"	35.15"	28.12"	21.09"
7.87'	65.62"	52.49"	39.37"	56.24"	44.99"	33.75"
9.18'	76.55"	61.24"	45.93"	65.62"	52.49"	39.37"
10.50'	87.49"	69.99"	52.49"	74.99"	59.99"	44.99"
11.81'	98.43"	78.74"	59.06"	84.36"	67.49"	50.62"
13.12'	109.36"	87.49"	65.62"	93.74"	74.99"	56.24"
14.43'	120.30"	96.24"	72.18"	103.11"	82.49"	61.87"
15.74'	131.23"	104.99"	78.74"	112.49"	89.99"	67.49"
17.06'	142.17"	113.74"	85.30"	121.86"	97.49"	73.12"
18.37'	153.11"	122.48"	91.86"	131.23"	104.99"	78.74"
22.96'	191.38"	153.11"	114.83"	164.04"	131.23"	98.43"
32.80'	273.40"	218.72"	164.04"	234.35"	187.48"	140.61"

The above numbers are approximate, and may be slightly different from the actual measurements.

Input and Output Terminals

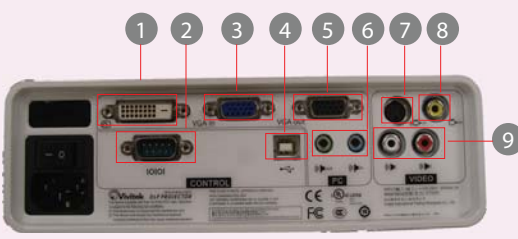

- 1 DVI-Input
- 2 RS-232C
- 3 VGA-Input
- 4 USB (Service)
- 5 VGA Output
- 6 PC (Audio In/Out)
- 7 S-Video
- 8 Video
- 9 Video (L/R)

© 2008 Vivitek Corporation. Standard features, options and specifications subject to change without notice. Vivitek is a trademark of Vivitek Corporation. DLP logo and DLP medallion are trademarks of Texas Instruments. All other trademarks are the property of their respective holders.

VIVITEK CORPORATION
 Tel: 626-369-8420
 Email: info@vivitekcorp.com
 www.vivitekcorp.com

*5 Year DLP® chip warranty is supported with the same process and terms/conditions as the 3-year warranty

