


Tamper Resistant/Weatherproof Intensifier™ Series Dome Cameras with Chameleon™ Cover

All menu functions controlled using an internal joystick

- HT7246iHR 2.8-12mm Auto Iris Varifocal lens
- HT7247iHR 9-22mm Auto Iris Varifocal lens
- HT7250iHR 5-50mm Auto Iris Varifocal lens

BEST SELLER!

Includes Paintable Chameleon™ Cover

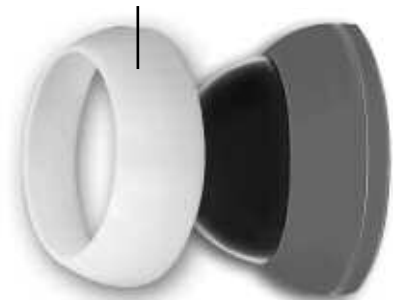

Includes video test connector

7246WMT

Wall Mount
(Sold Separately)



BCP
Corner/Pole Mount
(Sold Separately)

Intensifier™ Dome Features

- Intensifier™ Series See in the dark without IR LEDs
- Chameleon Cover Snap-on cover converts the housing from standard dark grey to decorator white and can be painted to match any décor.
- 580 Lines of Color Resolution Extreme resolution for extreme detail
- 2.8-12mm or 9-22mm Auto Iris Varifocal Lens A wider zoom range to fit more applications
- Wall & Ceiling Mount Features an internal 3-axis mount for maximum versatility
- Weatherproof / Tamper resistant Indoors or outdoors, meets all of your surveillance needs
- Dual Voltage Operation Auto-sensing 12 Volts DC or 24 Volts AC with line-lock.
- Warranty 5 years

Specifications

Resolution	580 TV lines
Intensifier™	Built-in (selectable from 2x to 256x)
Image Device	SONY HQ-1™ with a customized DSP behind it
Min. Object Illumination	0.002 lux (Intensifier™) 0.03 lux (shutter)
Speco Light Compensation (SLC/WDR)	OFF, LOW, MIDDLE, HIGH, HLC
Effective Picture Element	410K
White Balance	W-ATW / S-ATW / AWC / MANUAL
AGC	AGC-L, AGC-M, AGC-H, OFF selectable
Video S/N Ratio	Greater than 50db
Weatherproof Standard	IP66
Mechanical construction	Aluminum composite/polycarbonate - tamper resistant
Video Signal Output	1.0V(p-p) NTSC composite, 75 Ohms
Electronic Shutter1/60-1/100,000 seconds
Built In Lens	DC auto iris varifocal lens 2.8-12mm, 1:1.3-2.0 / BNC Connector + Video Test Connector
Power Consumption	230mA (DC) / 3.8W (AC)
Power Requirements	Requires 12V DC or 24V AC (Dual Voltage)
Scanning System	2:1 interlaced 525 lines / 60 fields / 30 frames
Synchronization	Internal / line lock selectable through OSD
Video Noise Reduction	ON / LOW / MIDDLE / HIGH
Motion Detection	MD1 / MD2 / OFF - Relay Outputs
On Screen Display (OSD)	Built-in
Operating Environment	-20°F to 120°F
Privacy function	ON / OFF (4 Programmable Zones)
Weight	24 ounces
Dimensions	6.29" W x 3.89" H

INTENSIFIER 2

See In The Dark Without IR LEDs!*



Flush Mount Kit
DFM2



See pgs. 79 & 80 for Mounting Accessories:
Conduit Compatible Dome Extension - CVCTPEXT
Flush Mount Kit - DFM2 • Junction Box Mount - CVCTPLATE

*Requires only 0.002 lux