


## FLOOR DRAIN FOR MEMBRANE FLOOR AREAS

**Specification:** MIFAB® Series F1100-C (\*)-1 (\* specify strainer diameter) lacquered cast iron floor drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and standard satin finished nickel bronze strainer. (For non-membrane floors, delete -C from Series number).

**Function:** Used in showers, kitchens, restrooms, and other membrane finished areas. Round adjustable nickel bronze strainer is used for all types of poured finished floors.

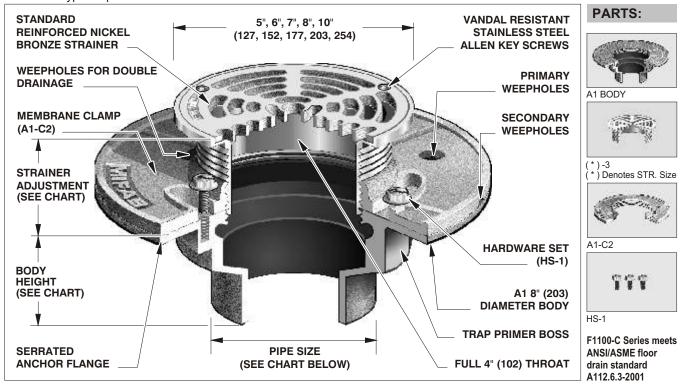

STRAINER	STR	AINER	ANSI/ASME RATING			IPE	BODY HEIGHT						
DIAMETER	ADJUSTMENT		FREE AREA	LOAD RATING	RATING S		NO HUB	PUSH	THREADED	INSIDE	PVC/ABS		
	MIN	MAX		N.B. (-1) D.I. (-4)			(STANDARD	) ON (P)	(T)	CAULK (X)	(-30)/(-31)		
5" (127)	1 9/16" (40)	2 11/16" (68)	8 in <sup>2</sup> (5200 <sup>2</sup> )	UP TO 5000 TO 2000 LBS. 7499 LBS	2"	(51)	2 3/4" (70	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16"(75)		
6" (152)	1 11/16" (43)	2 5/8" (67)	9 in <sup>2</sup> (5800 <sup>2</sup> )	UP TO 5000 TO 2000 LBS. 7499 LBS		(76)	2 3/4" (70	) 3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)		
7" (177)	1 1/2" (38)	2 5/8" (67)	12 in <sup>2</sup> (7700 <sup>2</sup> )	UP TO 5000 TO 2000 LBS. 7499 LBS	4"	(102)	2 3/4" (70	) 3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)		
8" (203)	1 7/8" (48)	2 3/4" (70)	18 in <sup>2</sup> (11600 <sup>2</sup> )	UP TO OVER 2000 LBS. 10000 LBS	5"	(127)	2 3/4" (70	))	2 5/8" (67)	3 3/4" (95)	_		
10" (254)	1 7/8" (48)	2 3/4" (70)	26 in <sup>2</sup> (17170 <sup>2</sup> )	UP TO	6"	(152)	3 1/4" (83	3) 4 3/4"(121)	_	_	_		

OPTIONAL VARIATIONS: SUFFIX		SUI	FFIX			SUFFIX			
☐ Nickel bronze strainer (standard) -1		Solid stainless steel strainer			No hub side outlet (2",3",	4") -90NH			
□ Polished brass strainer (5" only) -2		(Type 304-shank and grate)	-26		Client logo	-95			
☐ Stainless steel strainer -3		Bronze body	-27		Clamp ring for low rough-	in			
☐ 3M epoxy finish -3M		Stainless steel body (type 304)	-28		(min. ½" (13))	-C1			
☐ Ductile iron strainer (5", 8" only) -4		Stainless steel body (type 316)	-29		4" Round funnel	-F4			
☐ Sediment bucket -5		PVC socket connection body	-30		6" Round funnel	-F6			
☐ Security screws (T-20 torx & pin) -6		ABS socket connection body	-31		Oval 4" x 9" funnel	-G			
$\square$ ½" trap seal primer connection -7		Closure plug	-34		6" x 3" x 1" funnel	-J			
☐ Backwater valve (2",3",4") -8		Underdeck clamp	-40		No hub outlet	(Standard)			
☐ Acid resistant epoxy coating -11		Sump receiver	-41		Push on outlet	Р			
☐ All galvanized -13		Chrome plated strainer			Threaded outlet (2",3",4")	Т			
☐ Extension -15		assembly	-49		Inside caulk outlet	X			
☐ Secondary flat stainless steel		Lacquered cast iron funnel	-50		Extended wide elastomer	ic			
strainer (2",3",4") -21		Threaded side outlet (2",3",4")	-90		flange	-Z			
Job Name:		Page No:							
Section No:		Contractor:	Contractor:						
Schedule No:		Purchase Orc	Purchase Order No:						
MIFAB reserves the right to make changes in material and design w	thout forn	nal notice and obligation. USA: 1	USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880						

Page F4