


**MI-ROC SERIES**

MI-ROC grease interceptors are manufactured with 10 gauge steel and coated with a powder acid resistant epoxy coating inside and out. Every interceptor has an F.I.P. inlet and outlet, cast iron drainage fittings to form a visible double wall deep seal trap, removable separator and filter screens, recessed, non-skid gasketed rectangular lid for in or above ground use, removable cross bar, securing bolt(s) and plugs for the outlet connections not required.

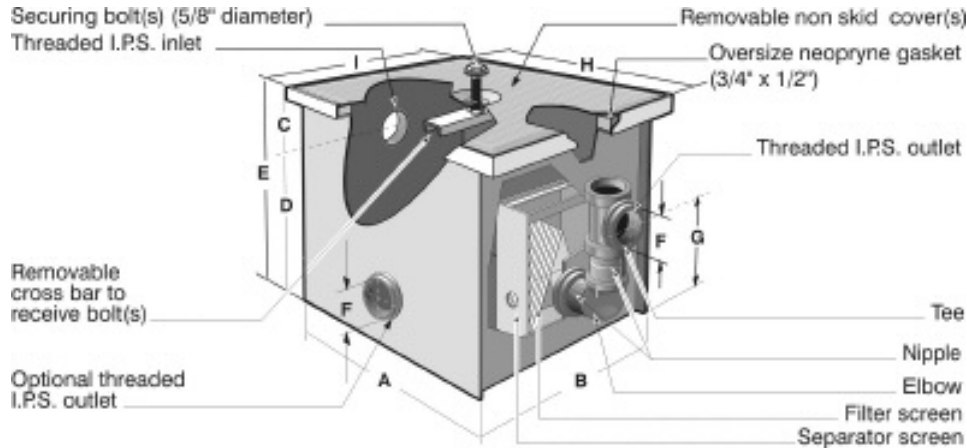

MODEL NO.	US GPM	CAP LBS.	BODY DIMENSIONS - INCHES							LID DIMENSION		LIQUID HOLDING CAP. IN US GALLONS	REPLACES ROCKFORD
			A	B	C	D	E	F	G	H	I		
MI-ROC-1	5	7	9.25	6.25	3.50	5.50	9	1.50	7.50	10.25	7.25	2	G(F)-710
MI-ROC-2	8	12	10.25	8.25	3.88	7.63	11.50	2	9.63	11.25	9.25	3.5	G(F)-1012
MI-ROC-3	12	18	12.75	10.25	4.50	8.38	12.88	2	10.75	13.75	11.25	6	G(F)-1412
MI-ROC-4	16	60	18.50	10.25	4.88	11	15.88	2	13.75	19.50	11.25	11.3	G(F)-1815
MI-ROC-5	20	70	20.25	14.25	5.88	12	17.88	2	15	21.25	15.25	18.7	G(F)-1820
MI-ROC-6	30	90	24.50	18.25	6.13	14.50	20.63	3	17.88	25.50	19.25	34.5	G(F)-2420
MI-ROC-7	35	120	24.50	18.25	8.63	16.50	25.13	3	20.75	25.50	19.25	40	G(F)-2635
MI-ROC-8	40	180	26.25	20.25	7.88	21.50	29.38	4	25.75	27.25	21.25	59	G(F)-2824
MI-ROC-9	50	220	29.50	20.25	8.38	21.50	29.38	4	25.75	30.50	21.25	46.6	G(F)-3050
MI-ROC-10	60	250	33	20.25	7.88	21.50	29.38	4	25.75	34.00	21.25	74.5	G(F)-3224
MI-ROC-11	75	300	33	22.75	8.50	22	30.50	4	26.25	34.00	23.75	85.3	G(F)-3475
MI-ROC-12	100	350	35.50	30	8.13	22	30.13	4	26.25	36.50	31.00	114.2	G(F)-3628
MI-ROC-LO-1	16	65	20.25	14.25	4.63	6	10.63	2	8.75	21.25	15.25	10.9	G(F)-23-LO
MI-ROC-LO-2	20	80	26.25	20.25	7.13	6.50	13.63	2	10.25	27.25	21.25	23.6	G(F)-25-LO
MI-ROC-LO-3	30	90	30.25	20.25	7.13	6.50	13.63	3	10.25	31.25	21.25	27.2	G(F)-30-LO
MI-ROC-LO-4	35	108	36.25	20.25	7.13	6.50	13.63	3	10.25	37.25	21.25	32.6	G(F)-36-LO
MI-ROC-LO-5	40	200	44.50	20.25	5	11	16	3	11	45.50	21.25	42.9	G(F)-45-LO
MI-ROC-LO-6	50	250	49.50	20.25	5	11	16	3	11	50.50	21.25	47.7	G(F)-50-LO

**OPTIONAL VARIATIONS**

- Stainless steel interceptor
- Anchor flange and membrane clamp
- Anchor flange
- Extension "C" as required
- Sediment Bucket
- Heavy duty reinforced lid(s)

**Suffix**

- SS
- FLC
- FL
- C
- SB
- HD

**Suffix**

- Double wall contained interceptor
- Anode pack
- Special size inlet and outlet
- Lid(s) to receive tile or terrazo
- MJ(No-Hub) connections
- Aluminum lid(s)
- Leak detection system
- Liquid level alarm
- DW
- AP
- Specify
- TL
- NH
- AL
- LD
- HLA

All sales subject to MIFAB's terms and warranties. Please refer to inside front cover.