


# Communication & Control Cables

**WEST PENN WIRE**

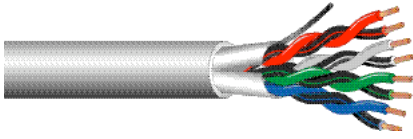

## Communication & Control Cable Multiple Pair 18 AWG / Overall Shielded featuring the PERFECT PAIR®

### Description:

- ASTM Bare Copper • PVC insulation • Overall shield 100% coverage of aluminum polyester foil with 22 AWG Strd. TC drain wire • Short overall twist construction • Overall PVC jacket

### Rating:

- NEC Type CMR
- (UL)-C(UL) Listed or c(ETL)us Listed
- Meets 300V requirements as specified in the NEC
- Flame Rating: UL1666

### Applications:

#### Indoor for:

- Intercom Systems
- Security Systems
- Sound and Audio
- Background Music
- Power-limited Control Circuits

Standard spool size 1000ft.

Catalog No.	No. of Pairs	Conductor Type & Nom. D.C.R	Insulation Type & Thickness Inches	Shielding & % Coverage	Jacket Type & Thickness Inches	Nom. O.D. Inches	NEC Type	Nom. Capacitance	Jacket Color
3751	2	18 AWG (7x26) 6.2 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.252	CMR	68 pf/ft* 122 pf/ft**	Gray
3752	3	18 AWG (7x26) 6.2 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.279	CMR	68 pf/ft* 122 pf/ft**	Gray
3753	4	18 AWG (7x26) 6.2 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.306	CMR	68 pf/ft* 122 pf/ft**	Gray
3754	6	18 AWG (7x26) 6.2 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.369	CMR	68 pf/ft* 122 pf/ft**	Gray

Color Code- See pg. 21

\* Capacitance between conductors.

\*\* Capacitance between one conductor and the other connected to the shield

### Special Notes:

- Select cables are available in our Easybox®
- Orange ripcord included on cables containing 3 or more pairs