




FHA, FHG

FLOOR ACCESS DOOR

Internet address: www.mifab.com

Toll Free: 1-800-465-2736

Canada Toll Free: 1-800-387-3880

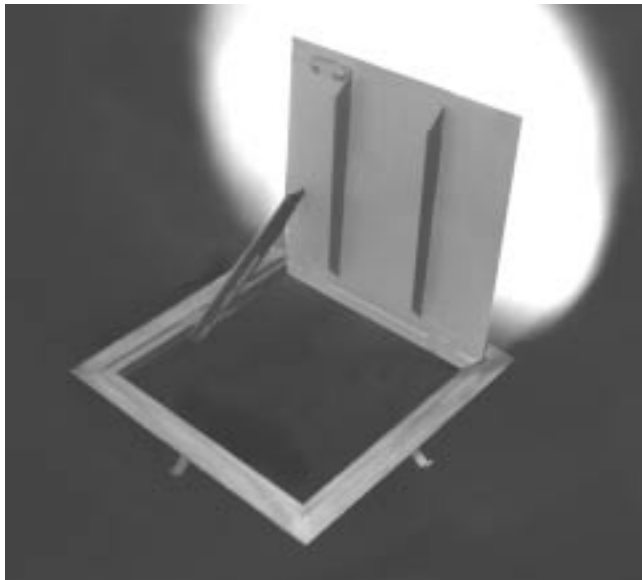

SERIES FHA, FHG

FLOOR ACCESS DOOR

DESCRIPTION

The MIFAB® FHA and FHG floor access doors are for interior or exterior use where easy access is required. The angle frame construction with integral anchor flange is designed to be cast into concrete. Available in either prime coated steel (FHG) or aluminum (FHA). Standard units withstand load bearing of 300 lbs. per square foot. Also available are watertight floor access doors which are manufactured with a neoprene gasket and a 1 1/2" (38) drain coupling. MIFAB's floor access doors are designed for safety, durability and ease of operation.

SPECIFICATIONS

Material	FHG Series has a door made of 3/16" (4) thick A36 steel diamond plate. FHA Series has a door made of 3/16" (4) thick structural grade aluminum diamond plate. Both doors can support 300 lbs. per square foot live load. Frame material is composite hot rolled steel angle frame.
Finish	FHG Series is a primed grey finish. FHA Series is aluminum mill finish. Frame is finished with a bituminous coating.
Door	Flush to frame. Equipped with an automatically locking hold open arm that locks the door in the open position. Also available are 1/4" (6) thick doors reinforced to meet AASHTO H20 traffic loading (without impact for the FHA Series).
Frame	Complete with a 1" (25) anchor flange. All hardware is type #316 stainless steel.
Hinge	Tamper proof steel hinges with stainless steel pins.
Opening Device	Automatic locking hold open arm with red vinyl grip allows door to open 90 degrees.
Handle	Stainless steel recessed lift handle in the door.
Lock	The lock provided is one of the following: padlock staple, type #316 stainless steel snap lock with removable handle, recessed hasp, type #316 stainless steel pentahead, keyed deadbolt lock or hasp and staple.
Warranty	Ten years.


STANDARD SIZES (special sizes available upon request)

DOOR SIZE		FLOOR OPENING		SHIPPING WEIGHT	
Inches	mm	Inches	mm	FHA	FHG
"B" x "A"	"B" x "A"	Inches	mm	lbs.	kg.
24 x 24	610 x 610	24 1/2 x 24 1/2	622 x 622	30 13.6	45 20.4
24 x 30	610 x 762	24 1/2 x 30 1/2	622 x 775	40 18.1	60 27.2
24 x 36	610 x 914	24 1/2 x 36 1/2	622 x 927	45 20.4	70 31.8
24 x 42	610 x 1066	24 1/2 x 42 1/2	622 x 1078	55 25.0	85 38.6
30 x 30	762 x 762	30 1/2 x 30 1/2	775 x 775	45 20.4	70 31.8
30 x 36	762 x 914	30 1/2 x 36 1/2	775 x 927	55 25.0	85 38.6
30 x 48	762 x 1219	30 1/2 x 48 1/2	775 x 1232	65 29.5	100 45.4
36 x 36	914 x 914	36 1/2 x 36 1/2	927 x 927	60 27.2	90 40.9
36 x 48	914 x 1219	36 1/2 x 48 1/2	927 x 1232	70 31.8	105 47.7
42 x 42	1066 x 1066	42 1/2 x 42 1/2	1078 x 1078	75 34.0	115 52.2
48 x 48	1219 x 1219	48 1/2 x 48 1/2	1232 x 1232	95 43.1	145 65.9
48 x 72	1219 x 1828	48 1/2 x 72 1/2	1232 x 1840	130 59.0	200 90.9
60 x 60	1524 x 1524	60 1/2 x 60 1/2	1535 x 1535	140 63.6	210 95.4

Suffix - G - watertight pedestrian door
 Suffix - H20 - 1/4" (6) thick door reinforced to meet AASHTO H20 traffic loading (without impact for the FHA Series).

Optional Accessories

- Compression Spring Assist
- Skirting to Depth of Slab
- Fibreglass insulation
- Safety Chains and Posts
- Access-Nets - Safety Net System
- Hoists
- Bolt-on Style Ladders

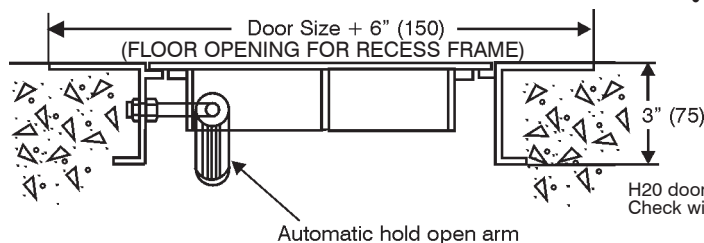

(Dimension) Denotes Millimetres

NOTE: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.