
INDIRECT WASTE FUNNEL

Specification: MIFAB® F1780 lacquered cast iron indirect waste funnel.

Function: Used in hospitals and laboratories with indirect waste lines installed above the floor. The funnel will receive condensate, drip or waste water from the indirect waste lines. MIFAB's MI-950 deep seal trap connected to MIFAB's M-500 Series of trap seal primers are recommended for use with the F1790 to prevent sewer gases from entering the room.

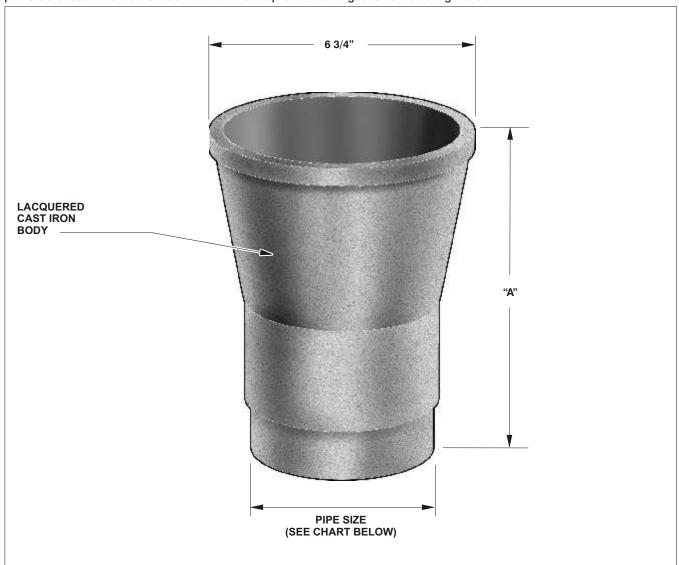

PIPE	BODY HEIGHT "A"			
SIZE	NO HUB (STANDARD)	PUSH ON	PVC / ABS	
		(P)	(-30) / (-31)	
2" (51)	10" (254)	10 3/8" (263)	10 3/8" (263)	
3" (76)	10" (254)	10 3/8" (263)	10 3/8" (263)	
4" (102)	10" (254)	10 3/8" (263)	10 3/8" (263)	
6" (152)	8 3/4 (222)	- ' '		

OPTIONAL VARIATIONS: ☐ No hub outlet ☐ Push on outlet ☐ Acid resistant epoxy coating ☐ All galvanized	P -11	 □ Secondary dome strainer □ Secondary flat strainer □ PVC socket connection body □ ABS socket connection body 	SUFFIX -20 -21 -30 -31
Job NameSection No:Schedule No:		Page No:	

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880