

FPL

FPL fan panel

Heavy duty, 16 gauge steel; three space panels: punched to accommodate 1, 2 or 3 fans (4 1/2"); textured finish. 3U height. Fans sold separately. See page 14.



QFPL-1

QFPL quiet fan panel

Ultra quiet fan kits come pre assembled with one or two fans mounted to brushed, black anodized aluminum panels with wire fan guards. Rated at 28dBA per fan.



QFPL-2



VPL

VPL vent panel

For passive cooling of racks; .125" aluminum; 1, 2 or 3 space. Black brushed anodized or clear finish.



VPL-CL



AFG

AFG aluminum flanged panel

1/2" flanged for additional strength; sturdy .060 aluminum; available in 1 through 4 rack space versions; easily machined. Available in black and clear brushed anodized aluminum.



AFG-CL1



AFG-CL2



SFT

SFT steel flat panel

Sturdy 14-gauge cold rolled steel; perfect for use where economy is the key; 1 through 4 spaces; textured finish. 5, 6 & 7 space available.



SFG

SFG steel flanged panel

16-gauge, cold rolled steel; 1/2" flanged for additional strength. Perfect for use where economy is the key. 1 through 4 spaces; textured finish. 5, 6 & 7 space available.

PANELS

AFT aluminum flat panel

.125" aluminum; available in 1 through 4 rack space versions. Black brushed anodized or clear finish.



EVP economy vent panel

Inexpensive flanged panel for passive cooling; 16-gauge, cold rolled steel; available in 1, 2 or 3 space; smooth finish.



SEC & PSC security covers

SEC and PSC security covers prevent tampering with equipment; 16-gauge perforated steel; one piece construction avoids use of welded on ears; 1" offset to clear knobs; neoprene gasket edges the steel preventing gear from being scratched. Notches for screws allow removal of cover without removing gear. Available in 1, 2 and 3 space versions. Black baked enamel finish.

Please note that the SEC series allows the user an almost perfect view of the secured equipment through 5/32" holes, while the PSC series allows a much more limited view through 1/16" holes.




PVP & FVP vent panels

PVP and FVP perforated vent panels are of one piece 16-gauge steel construction; finished in black baked enamel and available in 1, 2, 3 and 4 space configurations. The 5/32" perforations in the PVP series allow for optimum air circulation, while the 1/16" perforations of the FVP provide a more limited view.



Speciality Panels

Constructed of 16-gauge cold rolled steel and flanged for strength; punched to accommodate 12 female XLR's (S-12F), 12 male XLR's (S-12M), 6 male and 6 female XLR's (S12H) and 16 1/4" connectors (S1625).

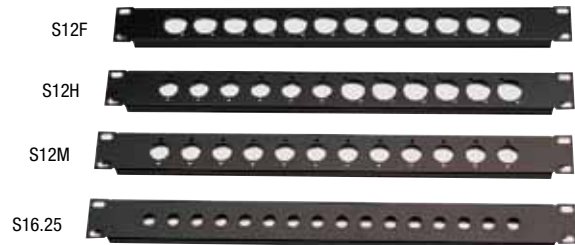

finishes

