

# CM1001d-T

**In-Ceiling Subwoofer**  
 Technical Information for System Engineers



**SOUNDTUBE**  
 ENTERTAINMENT



## Specifications: CM1001d-T

## Tile bridge included

System Type	10" Subwoofer, in-ceiling, ported (150 Watt transformer for 25/70.7/100 Volt or 8 ohm direct)
Impedance (nominal) <sup>1</sup>	8 ohm
Sensitivity dB @ 2.83V/1M	92.0 dB
Sensitivity dB @ 1W/1M <sup>2</sup>	92.0 dB
Frequency Response (-3 dB) <sup>3</sup>	55 Hz - 118 Hz
Frequency Response (-10 dB) <sup>3</sup>	41 Hz - 224 Hz
Max. Program Power <sup>4</sup>	300 w
Max. Continuous Power RMS <sup>5</sup>	150 w
Max. Power SPL @ 1 M <sup>6</sup>	114.0 dB
<b>Transducers</b>	
Low Frequency Driver	254mm (10 in) Polypropylene cone, butyl rubber surround
Low Frequency Voice Coil	35.0 mm / 1.38 in
Crossover Frequency	120 Hz
<b>Network Type</b>	
Low Pass Filter	6dB per octave, 1st order
Enclosure Material	Drawn steel backcan with ABS baffle
Motor Board	N/A
Grille	Powder coated steel with integrated ABS baffle
Inputs	4 Pin, 5 mm Euroblock for individual or daisy chain connection
Colors	Black or white
Backcan Height	11.77 in / 299.0mm
Visible Diameter	14.76 in / 374.9 mm
Visible Height	1.08 in / 27.4 mm
Mounting Hole Diameter	12.75 in / 323.9 mm
Min. Ceiling Thickness	0.25 in / 6.4 mm
Max. Ceiling Thickness	1.69 in / 42.9 mm
Weight	27.0 lb / 12.3 kg
Shipping Weight	32.0 lb / 14.5 kg
<b>Accessories</b>	
Included	Tile bridge, Euroblock connector, paint mask, restraint cable
Optional	Pre-construction Bracket (AC-CM8-PCB), Junction Box (AC-CM-JBOX)
Packaging	1 per box
Regulatory - CE	Approved
Regulatory - UL	UL 1480 & 2043 Approved

<sup>1</sup> Impedance listed per IEC 60268-5

<sup>2</sup> 1w/1m sensitivity determined using nominal impedance

<sup>3</sup> Frequency response measured in half or full space as dictated by speaker mounting configuration

<sup>4</sup> Max program power is 3 dB above max continuous power

<sup>5</sup> Continuous power rating, EIA-426-B test

<sup>5</sup> Max output based on max continuous power

<sup>6</sup> Max useable SPL based on testing by NWA Labs

## Transformer Taps - 5-Position rotary switch with 8 ohm direct

70.7 V Output	100 V Output	25 V Output
150 w 114.0 dB	150 w 114.0 dB	19 w 105.0 dB
75 w 111.0 dB	75 w 111.0 dB	9.5 w 102.0 dB
38 w 108.0 dB	38 w 108.0 dB	4.8 w 99.0 dB
19 w 105.0 dB		2.4 w 96.0 dB

## Key Features

- One 254 mm (10 in) polypropylene cone with a butyl rubber surround on a reinforced ABS baffle.
- Extra-large SoundTube-specific 12.9 L steel DeepCan™ (11.77" depth) for quality bass response.
- Baffle-mounted flared and tuned port for maximum efficiency and frequency response.
- High-output (114 dB) and maximum efficiency with an accentuated 70 Hz peak to maximize listener's low-frequency experience.
- Includes an easy-access 5-position tap switch for 25/70.7/100 Volt and 8 Ohm settings allowing for easy ordering, stocking and installation.
- Incorporates a powder-coated steel grille for lasting durability plus a tool-free seismic strap for easy installation.
- UL 1480 & 2043, cUL, CE (EMC Directive 89/366/EEC, EN55020, EN55013) approved.
- Rapid-installation blind-mount, fixed-wing mounting mechanism with constant-tension design affixing to ceiling thicknesses ranging from 0.25 in (6.4 mm) to 1.69 in (42.9 mm).
- Included accessories: Color coded (purple) tile bridge, grille, UL-rated cover plate, paint shield and restraint cable.
- Optional accessories: Color-coded (purple) pre-construction bracket (AC-CM8-PCB), junction box (AC-CM-JBOX).
- High-quality black or white painted finish. Custom colors available.

## Description

The CM1001d-T is a 10" blind-mount in-ceiling subwoofer tuned for maximum output and performance across the operating bandwidth. By incorporating a 10" polypropylene woofer and a butyl rubber surround in a tuned and ported enclosure, this speaker delivers maximum low frequency response (41 Hz – 224 Hz, -10 dB) and high SPL (114 dB). For added low-end punch, SoundTube has incorporated an oversized enclosure and tuned, flared port.

Mounting hardware is included and features a constant-tension fixed-wing mounting system with a 21 gauge "full-metal" steel tile bridge, ensuring rapid and secure installation in any sheetrock or drop-tile application. For easy ordering, stocking and installation, the CM1001d-T includes a color-coded (purple) tile bridge and ships with a 5-position tap switch for 25, 70.7 & 100 V applications with voice coil/8 Ohm bypass.



### Applications

The CM1001d-T is a background to foreground subwoofer for installations where high quality, true bass response and rapid installation are critical variables. Aerobic rooms, retail, restaurants, night-clubs, hotels, bars, theme parks, arenas, ballrooms and churches are all ideal fits for the CM1001d-T. Because overall system design is a critical component of subwoofer integration, SoundTube engineering recommends incorporating a DSP system with an active crossover to maximize the subwoofer integration and overall system performance. Tuning the system based on room acoustics and loudspeaker selection, will result in smooth response and reduced subwoofer localization.

For system engineering assistance, contact SoundTube at [engineering@soundtube.com](mailto:engineering@soundtube.com) or by calling 800-647-8823 (international: +1-435-647-9555).

### Patented SoundTube Technologies

SoundTube Entertainment and the MSE Audio Group constantly develop new technologies which enhance audio product performance. SoundTube Entertainment innovations are protected by multiple U.S. & international patents, which explicitly cover SoundTube dome, enclosure and dispersion technologies. The MSE Audio Group actively defends its patents in order to protect SoundTube resellers and end-users.

### Technical Data and Specification Tools

#### Technical Data

SoundTube Entertainment strives to

provide complete and effective technical information and data to dealers, engineers and designers. All data are available from SoundTube Entertainment or at [www.soundtube.com](http://www.soundtube.com) and includes EASE™ Data – 3-D polar plots and SoundTubeSPEC™ – Proprietary SoundTube speaker placement software.

### Independent Data Acquisition & Verification

All data for SoundTube speakers is independently collected from and verified by NWAALabs ([www.nwaalabs.com](http://www.nwaalabs.com)) using their proprietary MACH testing system. All data is collected and analyzed according to ASTM, ISO and AES standards using EASERA, TEF and MLSSA. Full balloon data including both phase and magnitude is compiled into a variety of formats including EASE 4.x, GLL and CLF.

### Architectural Specifications

The subwoofer shall consist of one 254 mm (10 in) low-frequency transducer installed in a 12.9 L ported enclosure. The transducer shall have a polypropylene cone with a butyl rubber surround. The speaker shall be the CM1001d-T (with 150 Watt transformer).

Performance specifications of a typical production unit shall be as follows: Usable frequency range shall extend from 41 Hz - 224 Hz, -10 dB. Maximum continuous output at 1 meter shall be at least 114 dB. The CM1001d-T subwoofer shall be available with selectable 25/70.7/100 Volt and 8 Ohm/voice coil direct tap switch. Rated power capacity of the components and network shall be at least 150 Watts continuous RMS and conform to EIA-426-B testing.

The backcan shall be constructed of galva-

nized steel with a UL 94 V(0) flame-rated ABS baffle. The grille shall be constructed of powder-coated steel. Packaged complete with UL-rated conduit cover plate, color-coded tile bridge (to match color-coded backcan label), grille, and paint shield. The integrated CM1001d-T in-ceiling subwoofer is engineered for high performance and rapid installation in plenum spaces. The CM1001d-T incorporates a secondary attachment point for added security, or where required by code.

Installation for the CM1001d-T shall be by 2-screw blind-mount constant-tension fixed-winged assembly and shall attach to ceiling thicknesses ranging from 0.25 in (6.4 mm) to 1.69 in (42.9 mm). The external wiring input connector shall be a 4-pin, 5 mm Euroblock for 8 Ohm or distributed systems and shall accept from 10 – 22 gauge wire.


The CM1001d-T is factory preset 70.7 Volts in the 150 Watt operating mode with a tap switch located on the front baffle. The system shall be the SoundTube CM1001d-T for low and high impedance applications.

### SoundTube Entertainment


6430 North Business Park Loop  
Park City, Utah 84098  
Phone 435.647.9555  
Fax 435.647.9666  
Toll Free 800.647.TUBE  
[www.soundtube.com](http://www.soundtube.com)

### Graphs and Plots

Frequency Response

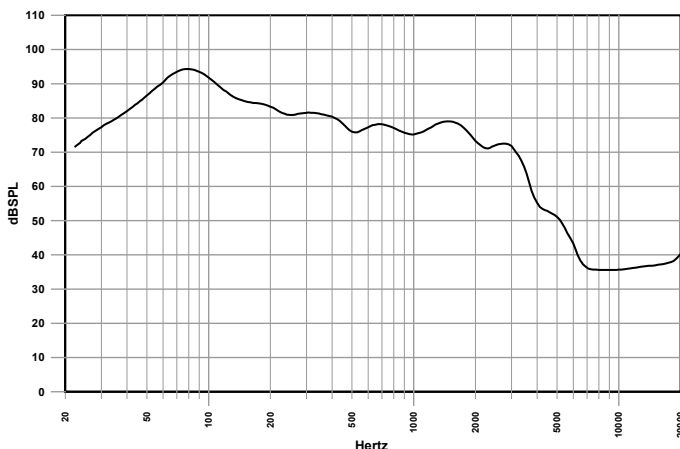


Phase/Impedance Response

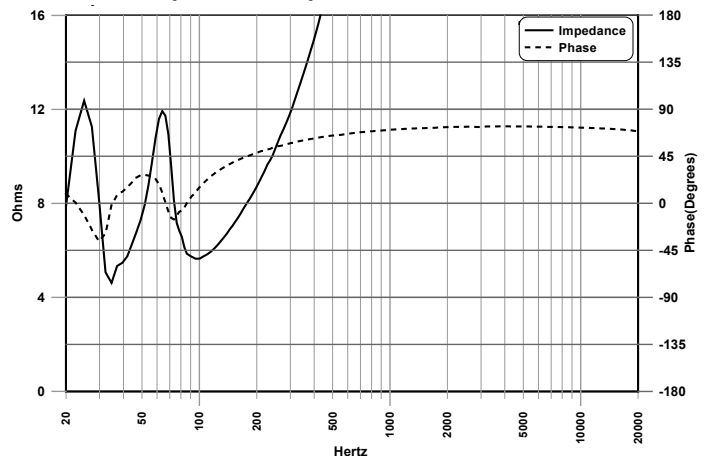




## Vertical Beamwidth (-6 dB)

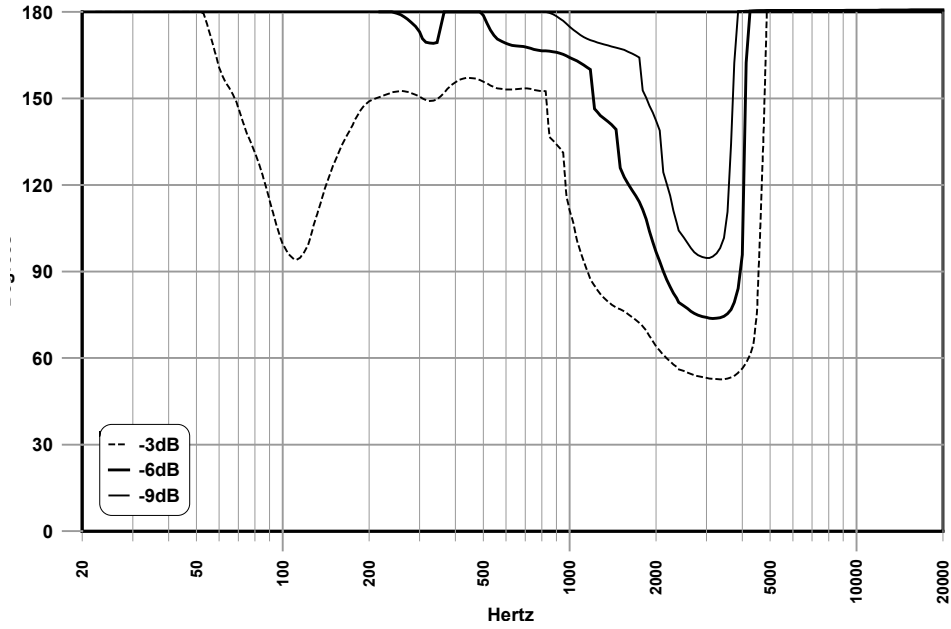

## Directivity Index (DI)

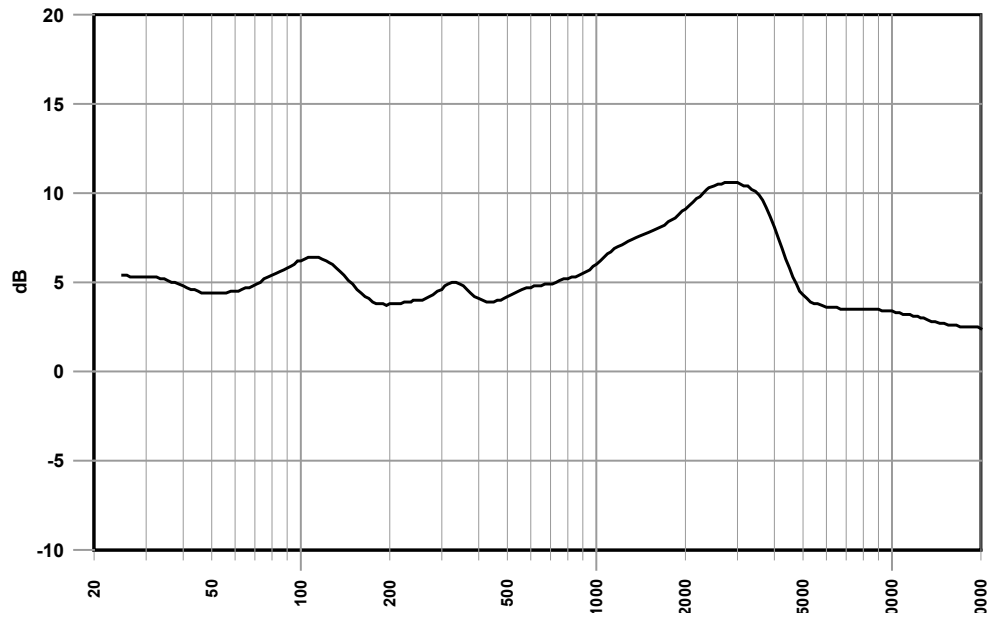

# CM1001d-T


**In-Ceiling Subwoofer**  
 Technical Information for System Engineers




**SOUNDTUBE**  
 ENTERTAINMENT

## Polar Plots


40 Hz




50 Hz




63 Hz




80 Hz

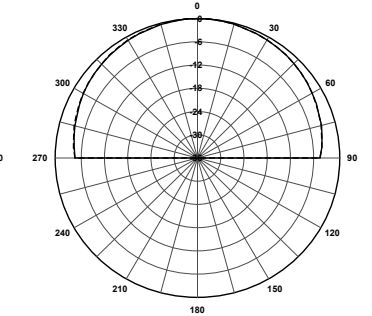


100 Hz



125 Hz




250 Hz




Technical data, EASE™ plots, SoundTubeSPEC™ software & product downloads available at [www.soundtube.com](http://www.soundtube.com)

## Mechanical Drawings


Side

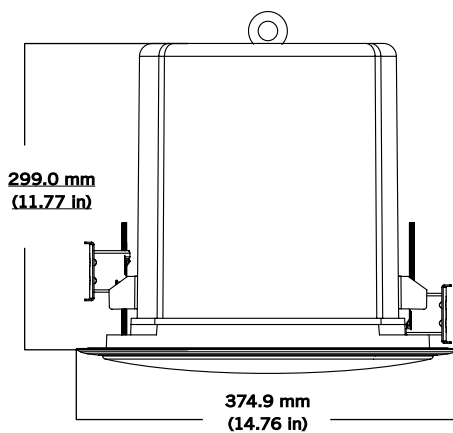


Top

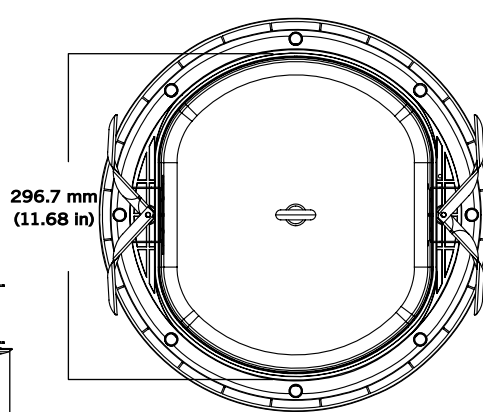

## Included Accessories




## Suspension Cable & Hardware

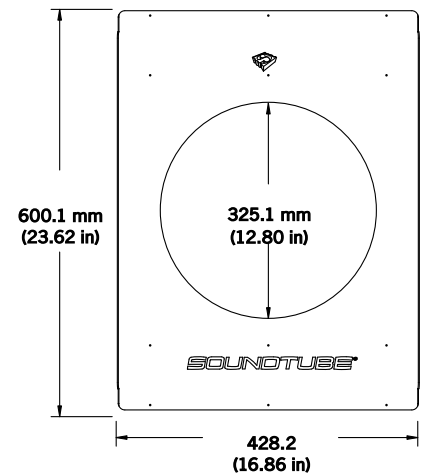


## Tile Bridge

## Optional Accessories



## Pre-Construction Bracket (AC-CM8-PCB)



## Junction Box (AC-CMi-JBOX)

SoundTube Entertainment manufactures a complete line of speakers for:  
**Open-Ceiling • In-Ceiling • Surface-Mount • Outdoor • Sound-Focusing**

All SoundTube products are designed and engineered in the USA.