


# Protea

Protea specifications

## Protea 4.24D Distribution Processor

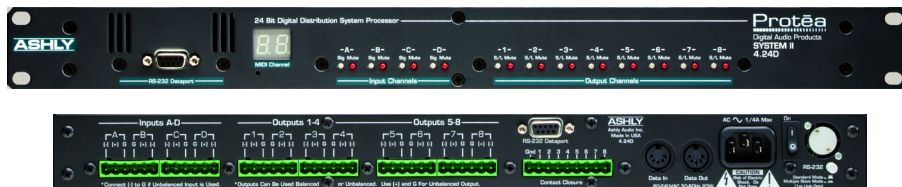

The 4.24D is a flexible four input/eight output digital signal processor capable of precise control of a broad range of audio functions. Because it has no user controls, it is ideal for applications where real-time changes are unlikely or when tamper-proof security is required.

Fast set-ups and a strong visualization of the Input/Output routing, EQ, and Filter curves, an RS-232 port is achieved using Ashly's control software (Protea Software Suite) and a PC. Full control is also available via MIDI input and output jacks.

The Protea 4.24D utilizes state of the art DSP technologies, beginning with 24 bit, 48kHz delta-sigma A/D converters with 128x oversampling. Digital processing includes Gain, Polarity Invert, Parametric EQ, Shelving Filters, Time Delay, Crossover Functions, Compression, Limiting, and Signal Routing, all taking place in twin 120MHz high performance DSP processors. D/A conversion uses 24 bit delta-sigma converters with 128x oversampling. All inputs and outputs are precision balanced and RF protected using Euroblock connectors.

Each input allows you to control gain and six filters (each of them your choice of parametric, low or high shelf). In addition to setting crossover frequencies, each output may be assigned to any one or a combination of inputs, allows you to program four parametric, low or high shelf filters, delay of up to 682ms, output gain, reverse polarity and a compressor/limiter for speaker protection. All this in one rack space with XLR input and output connections.

The Protea 4.24D combines precise audio processing and superior sound in a powerful, tamper-proof, easy to use processor for use in fixed installation applications requiring long, adjustable output delay.

### Features:


- One Rack Space
- Four Inputs - Eight Outputs
- Crossover, EQ, Delay and Limiter Functions
- Outputs Assignable to Any Input
- Superior Sonic Quality
- PC or MIDI Programming and Control
- Third Party Control Friendly
- Euroblock Audio Connections
- Balanced Inputs and Outputs
- Parametric Filters and Comp/Limiter to Control Feedback Problems
- Linkwitz-Riley, Bessel and Butterworth Filters
- 12, 18, 24 and 48dB/Octave Slopes
- Parametric EQ: 1/64th to 4 Octave Range
- Extensive Output Delay
- Limiter on Each Output
- Signal Present and Clip Indicators
- Four Levels of Security

### Applications:

- Multi-zoned systems
- Tamper-proof PA Systems
- FOH
- Monitors
- Aux fed subs
- L-C-R configurations

**Protea 4.24D Distribution Processor**

Input	Active Balanced, 18 kohms	Crossover High Pass Filter Type	Linkwitz-Riley, Bessel, Butterworth
Max Input Level	+20dBu	Crossover High Pass Filter Slope	12, 18, 24 and 48dB/Octave
Input Gain Range	+12/-40dB, 0.1dB Increments	Crossover High Pass Filter Range	Off to 21.98KHz, 245 step incr
Output	Active Servo Balanced, 112 ohms	Crossover Low Pass Filter Type	Linkwitz-Riley, Bessel, Butterworth
Max Output Level	+20dBu	Crossover Low Pass Filter Slope	12, 18, 24 and 48dB/Octave
Output Gain Range	+12/-40dB, 0.1dB Increments	Crossover Low Pass Filter Range	Off to 21.98KHz, 245 step incr
Polarity	0 or 180 degrees	Compressor/Limiter Threshold	-20dBu to +20dBu, 1dB incr
Frequency Response	20 Hz-20kHz, ±0.25 dB	Compressor/Limiter Ratio	1.2, 1.5, 2, 3, 4, 6, 10, 20:1, Infinite:1
THD	<0.01% @1 kHz, +20 dBu	Compressor/Limiter Attack	0.5ms to 50ms per dB
Dynamic Range	>110 dB (20 Hz-20 kHz) unweighted	Compressor/Limiter Release	10ms to 1Sec per dB
Output Noise	<-90 dBu unweighted	Compressor/Limiter Range	20Hz to 10.6KHz
EQ Filters	6 per input   4 per output	Input A/D	24 bit
Parametric EQ Bandwidth	1/64th Octave to 4 Octave	Output A/D	24 bit
Parametric EQ Range	+15/-30dB, 0.1 dB incr	Processor	24 bit, 56 bit accumulator
Frequency Resolution	1/24th octave	Sample Rate	48KHz
High-Shelf EQ Slope	6 or 12dB/Octave	Propagation Delay	1.46ms
High-Shelf EQ Frequency Range	19.7Hz to 2KHz	Power Requirements	90-240VAC, 40W
High-Shelf EQ Range	+/-15dB, 0.1dB incr	Shipping Weight	13lbs (Maximum)
Low-Shelf EQ Slope	6 or 12dB/Octave	Dimensions	19.0"W x 3.5"H x 8.5"D
Low-Shelf EQ Frequency Range	3.189KHz to 20.159KHz	Connections	Euroblock
Low-Shelf EQ Range	+/-15dB, 0.1dB incr	Environmental	40-120 deg. F (4-49 deg. C) non-condensing
Maximum Output Delay	682.5ms, 20uS incr		
Delay Increment	20uS		

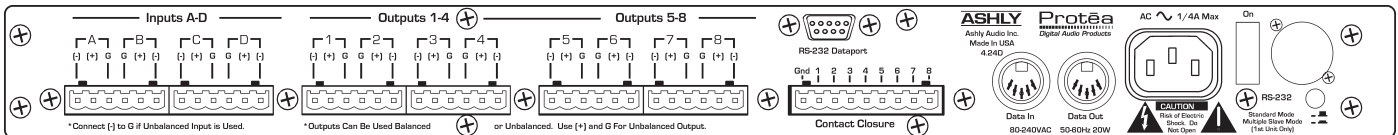

Ashly Audio, Inc.  
 847 Holt Road  
 Webster, New York USA 14580-9103  
 P: 800-828-6308, +1-585-872-0010  
 F: +1-585-872-0739  
 www.ashly.com info@ashly.com

Specifications subject to change without prior notice.  
 Latest information available at www.ashly.com.  
 © 2008 Ashly Audio, Inc.  
 Printed in U.S.A. 08/08

Notes:  
 0dBu = 0.775 VRMS