


Coaxial Cables

WEST PENN WIRE

V-Cat- Video Over UTP Cables

2 Pair + 2 Conductors - Siamese Construction
Non-Plenum and Plenum

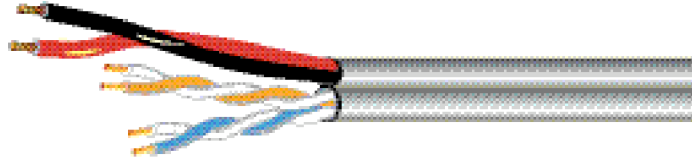

Applications:

- Video Over UTP

Standard spool size 1000ft.

Catalog No.	NEC Type	Cable Type & Description	Dielectric Type	Jacket Type	Nom. O.D.	Nom. Capacitance 2 Pair	Nom. VP 2 Pr.	Nom. Imp.Ω 2 Pair	Jacket Color
					Inches				
CC2418	CM	2 Pair 24 Awg Solid Category 5E Type UTP + 2 Cond. 18 Awg unshielded	Thermo-Plastic	PVC	.180 x .340	14 pf/ft	66%	100Ω	Gray
CC252418 Plenum	CMP	2 Pair 24 Awg Solid Category 5E Type UTP + 2 Cond. 18 Awg Unshielded	Plenum Thermo-Plastic	Plenum PVC	.185 x .345	14 pf/ft	66%	100Ω	Gray
CC2416	CM	2 Pair 24 Awg Solid Category 5E Type UTP + 2 Cond. 16 Awg Unshielded	Thermo-Plastic	PVC	.192 x .355	14 pf/ft	66%	100Ω	Gray
CC252416 Plenum	CMP	2 Pair 24 Awg Solid Category 5E Type UTP + 2 Cond. 16 Awg Unshielded	Plenum Thermo-Plastic	Plenum PVC	.190 x .350	14 pf/ft	66%	100Ω	Gray

Applications:

- Pair 1 - Category 5E type 100Ω - Used for Video Transmission
- Pair 2- Category 5E type 100Ω - Used for Video Transmission or Data Transmission, such as RS-422 or RS-485 or PTZ (Pan, Tilt, Zoom Controls)
- Two Conductors- 18 or 16 Awg. Solid bare copper conductors- Used for Power to the camera