

Power Conditioning & Test Equipment

AC Plug-In Adapters • Equipment AC Power Cords • Plug-In Surge Protectors • Heavy-Duty Outlet Strips



AC Plug-In Adapters
G3



Equipment AC Power Cords
G3



Plug-In Surge Protectors
G4



Heavy-Duty Outlet Strips
G5



Surge-Protected Strips
G5-G6



Rack-Mounted Power Strip
G6

Power Conditioning & Test Equipment

Analog Multimeter • Digital Multimeters • Cable Locator • Inductive Voltage Detector • Continuity Testers




Analog Multimeter
G7



Digital Multimeters
G7-G8



Digital Clamp Multimeters
G9



Inductive Voltage Detector
G10



Cable Locator
G10



Cable Continuity Testers
G10

G

QUICK - FIND
Guide to Product

Power Conditioning & Test Equipment

AC Plug-In Adapters

120VAC 15A 1875W 3-Wire NEMA 5-15 Grounded Outlets

- [1] **905-100** Polarized Grounding Adapter
3-Prong Outlet to 2-Prong Plug
- [2] **905-101** UL Polarized Grounding Adapter
3-Prong Outlet to 2-Prong Plug
UL Listed
- [3] **905-110** 3-Outlet Wall Tap
Converts 1 AC Outlet into 3 Outlets
UL Listed
Display Packaged for Resale



Equipment AC Power Cords

Power Cords Suitable for Personal Computers, Printers, Office Equipment, Instrumentation and Consumer Electronics Applications
18 AWG Stranded Copper Wire – Black Jacketed
120VAC 15A 1875W – UL Listed

- [4] **505-370** 6' 3-Conductor Extension Power Cord
Double-Insulated – Grounded
- [5] **505-375** 6' 3-Conductor Power Cord
Double-Insulated – Grounded
- [6] **505-390** 6' 2-Conductor Non-Polarized Cord
Single-Insulated
- [7] **505-395** 6' 2-Conductor Polarized Cord
Single-Insulated
- [7] **505-396** 6' 2-Conductor Polarized Cord
Double-Insulated



 Resale Packaged



Power Conditioning & Test Equipment

Plug-In Surge Protectors

Surge Protected Wall-Mounted Adapters
 3-Wire NEMA 5-15 Grounded Outlets
 High-Impact ABS Plastic Housing
 Brass Grounding Plug
 120VAC 15A 1875W – UL Listed



[8]



[9]



[10]



[11]



[12]

[13]

[14]



[13]



[14]

- [8] **905-302** 1-Outlet Plug-in Basic Surge Protector
 1-MOV Basic Protection
 LED Power Indicator
 Clamping Voltage 300V
 Surge Dissipation 90-Joules
 Response Time 25ns
- [9] **905-304** 3-Outlet Surge Protected Wall-Tap
 3-MOV 3-Line Protection
 LED Surge/Ground Fault Indicator
 Clamping Voltage 330V
 Surge Dissipation 270-Joules
 Response Time <1ns
 Display Packaged for Resale
- [10] **905-307** 6-Outlet Surge Protected Wall-Tap
 3-MOV 3-Line Protection
 LED Surge/Ground Fault Indicator
 EMI-RFI Noise Filtered
 Clamping Voltage 330V
 Surge Dissipation 270-Joules
 Response Time <1ns
 Display Packaged for Resale
- [11] **905-308** 6-Outlet Modem-Fax Surge Protector
 3-MOV 3-Line Protection
 EMI-RFI Noise Filtered – LED Indicator
 Clamping Voltage 330V
 Surge Dissipation 420-Joules
 Response Time <1ns
 Display Packaged for Resale
- [12] **905-309** 6-Outlet CATV-Satellite Surge Protector
 3-MOV 3-Line Protection
 EMI-RFI Noise Filtered – LED Indicator
 Clamping Voltage 330V
 Surge Dissipation 420-Joules
 Response Time <1ns
 Display Packaged for Resale
- [13] **905-310** 1-Outlet Modem-Fax Surge Protector
 3-MOV 3-Line Protection
 EMI-RFI Noise Filtered – LED Indicator
 Clamping Voltage 330V
 Surge Dissipation 210-Joules
 Response Time <1ns
 Display Packaged for Resale
- [14] **905-315** 1-Outlet CATV-Satellite Surge Protector
 3-MOV 3-Line Protection
 EMI-RFI Noise Filtered – LED Indicator
 Clamping Voltage 330V
 Surge Dissipation 210-Joules
 Response Time <1ns
 Display Packaged for Resale



Power Conditioning & Test Equipment

Heavy-Duty Outlet Strips

Heavy-Duty Multiple Outlet Strips
 Cord management end brackets allow cord to wrap around strip for convenient storage
 Bright Yellow Thick PVC Jacket
 Heavy-Duty Metal Housing
 3-Wire NEMA 5-15 Grounded Outlets
 Illuminated Breaker-Switch
 6' 14 AWG Grounded Power Cord
 125VAC 15A 1875W – UL Listed
 Display Packaged for Resale

- [1] **905-606** 6-Outlet Heavy-Duty Multiple Outlet Strip
2-Transformer-Spaced Outlets
- [2] **905-608** 8-Outlet Heavy Duty-Multiple Outlet Strip
3-Transformer-Spaced Outlets



[1] Cord Management Side Brackets

Surge-Protected Strips

Surge Protected Multiple Outlet Strips
 3-Wire NEMA 5-15 Grounded Outlets
 14 AWG 3-Wire Heavy-Duty Grounded Power Cord
 Less than 1ns Response Time
 125VAC 15A 1875W – UL Listed
 Display Packaged for Resale

- [3] **905-106** 6-Outlet Basic AC Surge Protector
1-MOV Basic Protection – 4' Cord
Built-In Resettable Circuit Breaker
Illuminated On-Off Rocker Switch
Built-In Hanging Brackets
High-Impact ABS Plastic Housing
Clamping Voltage 400V
Surge Dissipation 150-Joules
- [4] **905-109** 6-Outlet Basic AC Surge Protector
1-MOV Basic Protection – 3' Cord
Circuit-Breaker Rocker Switch
Built-In Hanging Brackets
High-Impact ABS Plastic Housing
Clamping Voltage 330V
Surge Dissipation 90-Joules
- [5] **905-206** 6-Outlet Basic AC Surge Protector
1-MOV Basic Protection – 4' Cord
Built-In Resettable Circuit Breaker
Illuminated On-Off Rocker Switch
Built-In Hanging Brackets
Baked-Enamel Metal Housing
Clamping Voltage 400V
Surge Dissipation 110-Joules



[2]



[3]



[4]



[5]



Power Conditioning & Test Equipment



[6]



Surge-Protected Strips

Surge Protected Multiple Outlet Strips
 3-Wire NEMA 5-15 Grounded Outlets
 6' 14 AWG 3-Conductor Heavy-Duty Power Cord
 Less than 1ns Response Time
 125VAC 15A 1875W – UL Listed
 Display Packaged for Resale

[6] **905-218** 6-Outlet Modem/Fax Surge Protector
 3-MOV 3-Line Protection – 6' Cord
 EMI-RFI Noise Filtered
 Built-In Resettable Circuit Breaker
 Illuminated On-Off Rocker Switch
 Phone/Fax/Modem Port
 LED Surge/Ground-Fault Indicator
 Built-In Hanging Brackets
 Child-Protected Slide Outlet-Covers
 High-Impact ABS Plastic Housing
 Clamping Voltage 400V
 Surge Dissipation 210-Joules



[7]



[7] **905-222** 9-Outlet Modem/TV Surge Protector
 Suitable for CATV/Satellite Installations
 3-Transformer-Spaced Outlets
 6-MOV 3-Line Protection – 6' Cord
 EMI-RFI Noise Filtered
 Illuminated Breaker-Switch
 Phone/Fax/Modem and TV Ports
 LED Surge/Ground-Fault Indicator
 Surge-Fail Audible-Alarm Alert
 Built-In Hanging Brackets
 Child-Protected Slide Outlet-Covers
 High-Impact ABS Plastic Housing
 Clamping Voltage 330V
 Surge Dissipation 1500-Joules



[8]



[8] **905-225** 8-Outlet Modem/TV Surge Protector
 Suitable for CATV/Satellite/Home Theater
 3-Transformer-Spaced Outlets
 6-MOV 3-Line Protection – 6' Cord
 EMI-RFI Noise Filtered
 Illuminated Breaker-Switch
 Phone/Fax/Modem/CATV/Satellite Ports
 LED Surge/Ground-Fault Indicator
 Surge-Fail Audible-Alarm Alert
 Built-In Hanging Brackets
 High-Impact ABS Plastic Housing
 Clamping Voltage 330V
 Surge Dissipation 2280-Joules

Rack-Mounted Power Strip



[9]



[9] **905-710** 19" Rack-Mounted Power Surge Strip
 10 Rear-Facing Outlets
 15' 14 AWG NEMA 5-15
 Grounded 3-Wire Cord
 6 MOV 3-Line Protection
 EMI/RFI Noise Filter (100kHz-1MHz)
 Built-In Resettable Circuit Breaker
 Front Facing/On/Off Switch
 LED Surge/Ground-Fault Indicator
 Black-Powder Coated
 Cold Rolled Steel Construction
 125VAC 15A 1875W – UL Listed
 Clamping Voltage 340V
 Surge Dissipation 570-Joules
 19"(W) x 1 3/4"(H) x 4"(D) w/Brackets
 17 1/4"(W) x 1 3/4"(H) x 4"(D) (without)
 Includes mounting screws



Power Conditioning & Test Equipment

Analog Multimeter

- [1] **602-030** Pocket Economy Analog VOM
 90° Arc Mirrored Scale
 Voltage 0-1000 VDC/VAC
 Sensitivity 2000Ω/Volt
 Current 0-250mA DC
 Resistance Rx10 Rx100 Rx1k Ω
 Includes 1 AA battery
 2½"(W) x 3⅞"(H) x 1⅜"(D)



Functions:
 • AC/DC Voltage
 • DC Current
 • Resistance
 • Diode-Continuity
 • Transistor Tester



Functions:
 • AC/DC Voltage
 • DC Current
 • Resistance
 • Diode-Continuity
 • Transistor Tester

Digital Multimeters

- [2] **602-010** 3½-Digit Digital Multimeter
 ½" LCD Display
 20-Position Rotary Range-Switch
 Diode and Transistor Tester
 Overload Protected
 Transistor Tester 1.5mA max.
 Voltage 200mV-1000V DC ±0.5%
 Voltage 200-750V AC ±1.2%
 Current 200μA-10A DC ±1%
 Resistance 200Ω-2MΩ ±8%
 High-Visibility Yellow Case
 Includes 30" test leads and 9V battery
 2⅝"(W) x 4⅞"(H) x 1"(D)
- [3] **602-035** 3-Digit Digital Auto Range Multimeter
 1" Digital, Analog Backlit LCD Display
 8-Position Rotary Range-Switch
 38 Segment Analog Bar Graph
 Display and Audio Continuity Test
 Diode Test – RS232C PC Interface
 Auto Power Off – Data Hold
 Volt. 4-400V DC ± 0.5%, 1kV DC ± 0.8%
 Volt. 4-400V AC ± 1.2%, 750V AC ± 1.5%
 Curr. DC 1-400mA ± 1.2%, 10A ± 2.0%
 Curr. AC 1-400mA ± 1.5%, 10A ± 3.0%
 Resistance 4MΩ ± 1.2%, 40MΩ ± 3.0%
 Yellow Injection Molded Tuff Case
 Includes 18" test leads and 9V battery
 3"(W) x 7¼"(H) x 1⅜"(D)
- [4] **602-040** 3½-Digit Adjustable-Display DMM
 1" High-Contrast LCD Display
 30-Position Rotary Range-Switch
 Diode and 50Ω Continuity Beeper
 Overload Protected – Data-Hold Switch
 Transistor Tester 10μA 3.4V
 Voltage 200mV-1000V DC ±0.5%
 Voltage 200mV-700V AC ±0.8%
 Input Impedance 10-100MΩ
 Current 200μA-10A DC ±0.8%
 Current 200μA-10A AC ±1%
 Capacitance 2nF-20μF± 2.5%
 Resistance 200Ω-20MΩ ±8%
 36" 1500V Double-Insulated Test Leads
 Yellow Injection Molded Tuff Case
 Includes leatherette case and 9V battery
 3¾"(W) x 7¾"(H) x 1⅝"(D)
- [5] **602-042** Replacement Leads for 602-040

[1]



[2]



[3]



Functions:
 • AC/DC Voltage
 • AC/DC Current
 • Resistance
 • Capacitance
 • Diode-Continuity
 • Beeper
 • Transistor Tester
 • PC Interface



[4]



Functions:
 • AC/DC Voltage
 • AC/DC Current
 • Resistance
 • Capacitance
 • Diode-Continuity
 • Beeper
 • Transistor Tester



[5]




Power Conditioning & Test Equipment


Digital Multimeters



[6] **602-070** 3 1/2-Digit Pocket DMM
3/4" LCD Display
Diode and 50Ω Continuity Beeper
Overload Protected
Voltage 2-500V DC ±0.5%
Voltage 200-500V AC ±1.2%
Input Impedance 1MΩ
Current 200mA DC ±1.5%
Resistance 2kΩ-2MΩ ±1.0%
18" Wrap-Around Test Leads
Includes leatherette pouch, 9V battery
2 3/4"(W) x 4 3/4"(H) x 3/4"(D)

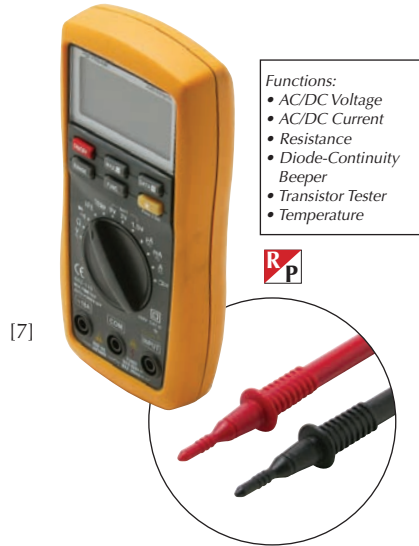

[7] **602-110** 3-Digit Autorange Digital Multimeter
Digital Backlit LCD Display
Display and Audio Continuity Test
Auto Range – Data Hold
Diode Test – Battery Test
Voltage 200mV-600V DC±0.7%
Voltage 200mV-600V AC±0.8%
Curr. DC 200μA-200mA±1.2%, 10A±2.0%
Curr. AC 200μA-200mA±1.5%, 10A±3.0%
Resist. 200Ω-2MΩ±1.2%, 20MΩ±2.0%
IEC1010-1 Cat III 600V Compliant
18" Test Leads – Includes AAA batteries
3"(W) x 6 1/4"(H) x 1 1/4"(D)

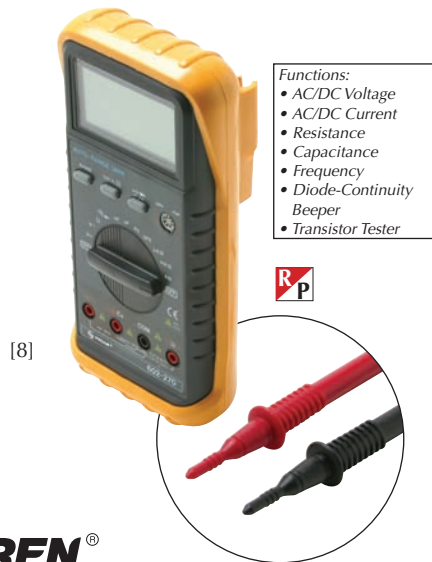

[8] **602-270** 3 3/4-Digit Auto-Range DMM
5/8" High Contrast LCD Display
33-Segment Fast Analog Bargraph
Diode and 50Ω Continuity Beeper
Manual Range-Override Switch
Overload Protected – Data Hold Switch
Transistor Tester 10μA 3.2V
Frequency 32.6-200kHz ±1.2%
Capacitance 326nF-32.6μF ±3.0%
Voltage 326mV-1000V DC ±0.3%
Voltage 326mV-750V AC ±0.8%
Input Impedance 10-100MΩ
Current 326μA-10A DC/AC ±1.5%
Resistance 326Ω-32.6MΩ ±0.8%
Yellow Injection Molded Tuff Case
36" 1500V Double-Insulated Test Leads
Includes tilt stand, holster, 9V battery
3 3/4"(W) x 7 3/4"(H) x 1 1/2"(D)



Power Conditioning & Test Equipment

Digital Clamp Multimeters

[1] **602-100** 3½-Digit Digital Clamp On Amp Meter
 Digital Back Lit LCD Display
 Insulation Test Function (Optional Unit)
 Audio Continuity Test – Data Hold
 Voltage 200mV-1000V DC \pm 0.8%
 Voltage 200-750V AC \pm 1.0%
 Current: AC 20-400A \pm 3.0%
 Resistance 200 Ω -2M Ω \pm 1.0%
 18" Test Leads – Includes 9V battery
 Includes black carrying case
 Includes dust-proof wrist strap
 2¾"(W) x 9"(H) x 1½"(D)

[2] **602-115** 3¾-Digit Mini Clamp-On Amp Meter
 Digital and Analog Backlit LCD Display
 42-Segment Fast Analog Bar Graph
 Display and Audio Continuity Test
 Diode Test – Auto Power Off
 Auto and Manual Range – Data Hold
 Voltage 0-600V DC \pm 1.0%
 Voltage 0-600V AC \pm 1.5%
 Current: AC 40-400A \pm 2.0%
 Resistance 400 Ω \pm 1.0%
 18" Test Leads – Includes AAA batteries
 Includes black carrying case
 Includes dust-proof wrist strap
 2¾"(W) x 7½"(H) x 1¼"(D)

[3] **602-150** Digital Open-Jaw Amp Meter
 Digital Back Lit LCD Display
 Display and Audio Continuity Test
 Diode Test – Auto Power Off
 Auto Range – Data Hold
 Volt 4-400V DC \pm 0.7%, 1kV DC \pm 0.8%
 Volt 4-400V AC \pm 0.8%, 700V AC \pm 1.0%
 Current: AC 200A \pm 3.0%
 Capacitance 40nF-4 μ F \pm 4.0%
 Resist. 400 Ω -4M Ω \pm 1.2%, 40M Ω \pm 2.0%
 Frequency Counter 40Hz-100kHz \pm 2.0%
 IEC 1010-1 Compliant
 18" Test Leads – Includes 9V battery
 Includes black carrying case
 Includes dust-proof wrist strap
 2¾"(W) x 7½"(H) x 1½"(D)



RP Resale Packaged

STEREN[®]

Power Conditioning & Test Equipment

Inductive Voltage Detector

- [4] **602-805** Non-Contact Inductive Voltage Detector
Senses 100-240VAC Within 2" Range
Emits Audible Tone and Flashing Light
2 AAA Batteries Included
3/4"(W) x 5 3/4"(H) x 1"(D)



Cable Locator

- [5] **602-810** Cable Locator Tone-Test Set
Amplifier Probe and Tone Generator
Helps locate, identify, trace cable-pairs, individual conductors in electrical, CATV, data, telephone and security cabling
Includes 9V batteries and nylon holster
Display Packaged for Resale



Inductive Amplifier Probe Features:
High-Sensitivity Detection Circuitry
Built-In 2-inch Speaker
Adjustable Volume Control for Added Sensitivity and Interference Reduction
Recessed On-Off Switch

Tone Generator Features:
Provides tip and ring identification, line condition and verification, and functions as continuity tester and 3-Color LED polarity tester
9V Peak-Peak Square-Wave Output
Alternating HI-LO or Solid Tones
Tone Frequency 700-1300Hz HI-LO
Tone Frequency 1000Hz Solid Tone
Output Impedance 2700Ω

Cable Continuity Testers

Traces runs, identifying shorts and confirming DC continuity in video, voice, data and audio cables
Red LED indicator lights up to identify shorts
Tone detector emits audible sound to confirm DC continuity
Right-angle head ensures ease-of-use in tight spaces
Detachable tone detector screws onto bottom of tester when not in use
Includes long-life 12V battery



- [6] **203-550** Pocket Toner
[7] **203-560** Pocket Toner Test Kit
Includes F, RCA, BNC, RJ11 and RJ45 adapters
Toner and adapters fit into slots inside durable carrying case

