


SERIES TTS - 6201

Braided Flexible Metal Threaded Connectors (321 Stainless Steel Hose with 304 Stainless Steel Braid and Male Carbon Steel Ends (NPT).

Table 4: Sizes • Offset • Working Pressures • Weights

Expansion Joint Size: ID X Length	Stock	Lateral Offset		Working Press (PSI)		Approx. Unit Ship Weight
		Intermittent	Permanent	@ 70 °F	@ 300 °F	
1/2 x 6 1/2	S	1/4"	1/2"	1300	1144	1
1/2 x 9	S	1/4"	1/2"	1300	1144	1
1/2 x 10	S	1/4"	1/2"	1300	1144	1
3/4 x 7	S	1/4"	1/2"	880	774	1
3/4 x 10	S	1/4"	1/2"	880	774	1
3/4 x 11	S	1/4"	1/2"	880	774	1
1 x 8	S	1/4"	1/2"	605	532	1
1 x 10	S	1/4"	1/2"	605	532	1
1 1/4 x 8 1/2	S	1/4"	1/2"	605	532	1
1 1/4 x 10	S	1/4"	1/2"	570	501	1 1/2
1 1/4 x 11	S	1/4"	1/2"	570	501	1 1/2
1 1/4 x 12	S	1/4"	1/2"	570	501	2
1 1/4 x 13	S	1/4"	1/2"	570	501	2
1 1/2 x 9	S	1/4"	1/2"	570	501	1 1/2
1 1/2 x 12	S	1/4"	1/2"	525	462	1 1/2
1 1/2 x 14	S	1/4"	1/2"	525	462	2
2 x 10 1/2	S	1/4"	1/2"	455	400	2
2 x 12	S	1/4"	1/2"	455	400	2 1/2
2 x 14	S	1/4"	1/2"	455	400	3
2 x 15	S	1/4"	1/2"	455	400	3
2 1/2 x 12	S	1/4"	1/2"	345	303	5
2 1/2 x 14	S	1/4"	1/2"	345	303	5 1/2
2 1/2 x 16	S	1/4"	1/2"	345	303	6
3 x 14	S	1/4"	1/2"	290	255	8
3 x 16	S	1/4"	1/2"	290	255	9
3 x 17	S	1/4"	1/2"	290	255	10

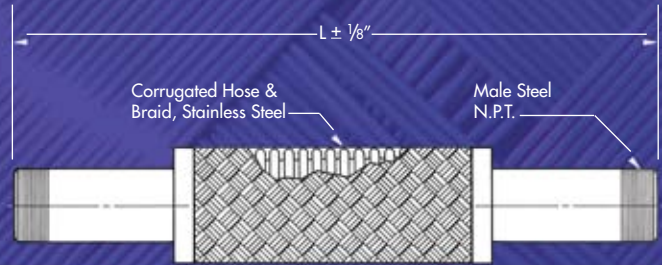

NOTES: 1. "S" indicates stocked item.
2. "X" denotes 1-2 week shipment lead time.