

EXHAUST HEAT RECOVERY



Boiler Economizer Systems



Rectangular Tube Recovery Series - RTR



Fin Coil Recovery Series - B/FCR



Boiler Economizer Series - FTR



Energy Manager Series - EM

"Manufacturing Waste Heat Transfer Products To Save Energy"

Since 1978, Cain Industries has dedicated itself to producing exclusively, combustion exhaust heat transfer products. Our successful experience with lowering fuel costs and reducing pollution makes us the first choice for both the retrofit and OEM client.

We set ourselves apart from the competition by producing products to serve the broad spectrum of the combustion retrofit markets: Diesel and Gas Cogeneration, Boiler Exhaust, and Fume Incineration. The knowledge gained from each market has helped the continuing improvement of the others. As the only manufacturer capturing all of these markets, we have developed the greatest selection of products to more precisely fit within their particular system applications. Coupled with our elaborate heat transfer programs and extensive CAD and graphics designs, we have developed twelve product lines with over 1,350 industrial heat transfer products.

We are also especially dedicated to a primary investment in our associates, their manufacturing technology, quality improvements, and innovative cost reductions. As a result our customers can expect the greatest return on their investment along with the longest lasting equipment.

The foundation which Cain Industries has built its success and reputation upon is our basic philosophy: to produce the highest quality products, and provide unmatched customer satisfaction.

Cain Industries is
10 miles northwest of
Milwaukee, Wisconsin
and 30 minutes from
General Mitchell
International Airport.



THE HEAT TRANSFER PRODUCT FAMILY FOR BOILER EXHAUST RECOVERY

INTRODUCTION

Cain Industries offers an extensive selection of boiler economizers specifically designed to recover the lost heat exiting from exhaust stacks and preheat water. Our broad line of economizers covers the spectrum of boiler sizes, ranging from very small hot water boilers with burner inputs of 200,000 Btu/hr to large boilers delivering steam at 250,000 lb/hr. In addition, Cain produces boiler feedwater systems, condensate tank and pump systems, exclusive sootblower assemblies, and unique modulating internal exhaust gas bypass systems.

EXHAUST APPLICATIONS

- Steam Boilers
- Hot Water Boilers
- Hot Oil Heaters
- Ovens and Dryers
- Specific Combustion Sources

EQUIPMENT VARIETY

- Boiler Economizers
- Sootblowers
- Circulating System Components
- Storage Tanks
- Modulating Internal Exhaust Gas Bypass Assembly

SYSTEM FUNCTION

Exhaust heat from combustion typically leaving the stack and into the atmosphere, is instead transferred from the exhaust stream by means of a Cain economizer. This lost Btu is now captured and saved to various heat sinks such as boiler feedwater, cold makeup water, process water, swimming pool water, glycol, and thermal fluids. Combustion source fuel types including natural gas, propane, digester gas, diesel fuel, No.2-6 fuel oil, and coal are all heat sources which can be retrofitted with Cain heat exchangers.

PROPOSAL CONSIDERATIONS

Consider Cain for cylindrical or rectangular stack connections, large or small boilers, a particular pinch point requirement, stack or liquid temperature control, special heat sink requirements, special heat transfer metallurgy requirements, specific maintenance concerns, optional equipment requirements, installation space and weight concerns, and package system requirements.

ANTICIPATED RESULTS

- Tremendous fuel savings typically pay for equipment and installation within 1 to 2 years of average use
- Pollution reduction equivalent to lowered annual fuel usage
- Longest heat exchanger life expectancy



RECTANGULAR TUBE RECOVERY SERIES

The RTR is ideal for large steam boilers and hot water boilers. The RTR is typically used to preheat boiler feedwater, process water, hot oil, or cold water condensing applications. A variety of heat transfer surfaces are available, including: 316L stainless steel, carbon steel, duplex stainless steel, and the stainless steel tube with aluminum bonded AL-FUSE™ product (see the example RTR product specification for materials). The exclusive, standard feature, internal stainless steel exhaust gas bypass can be used to temper the exiting gas for stack corrosion control, or to maintain water temperatures when too much heat is available.

COMBUSTION SOURCES

Steam boilers, hot water boilers and hot oil heaters with inputs up to 250,000,000 Btu/hr.

Btu/hr input to 250,000,000 - Entering exhaust temps to 1250°F




FEATURES

- Internal expansion design
- No pressure welds in the gas stream
- Mounting flanges for bolting to mating flanges/adapters
- Condensate drain catch ring assembly
- 10ga. structural exterior
- Stainless steel interior
- 2" factory insulation
- Removable access doors
- Stainless steel bypass
- Header manifold for high liquid flow
- Exclusive Cain compression fittings between finned tubes and the liquid manifolds for easy tube removal that requires no welding

Internal stainless steel bypass damper controls either exiting exhaust gas or liquid temperatures

Flexible stainless steel hose allows travel of the sootblower carriage

Sootblower controller maintains air/steam pressure during blowdown operation

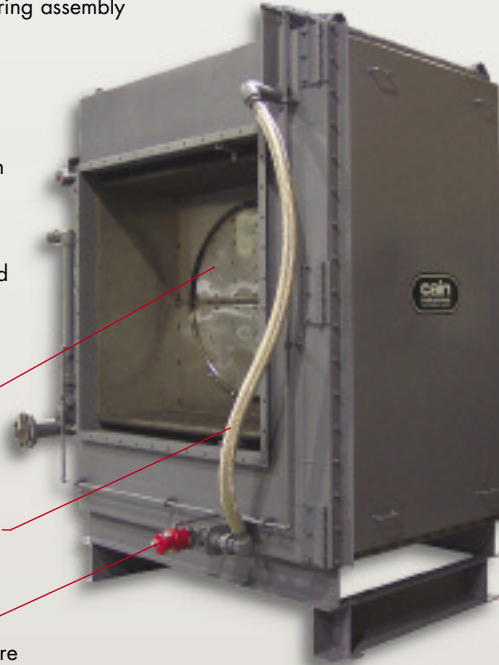

ETHANOL PLANT, Oshkosh, Wisconsin
RTR-166K25.7ALS recovering Btu from a 2,200 BHP, steam boiler; Reducing 367°F @ 18,473 SCFM to 299°F; Raising the temperature of 152 gpm of boiler feedwater from 227°F to 245°F.

Installation: structural support stand



OPTIONAL EQUIPMENT

- Modulating damper actuator assembly for automatic operation
- Hinged inspection doors for immediate access
- Timed automatic sootblower assembly provides blowdown without scheduling personnel
- Stack corrosion control assembly
- Structural support stand


Boiler Exhaust Application

- Capacity: to 250,000-lb/hr steam
- Entering gas temps: 300°F to 1250°F
- Heat sink types: Boiler feedwater, makeup water, hot water return, hot water storage tank, condensate tank, process water, potable water

ICE CREAM PLANT, Bakersfield, California
RTR-148F26ALS recovering Btu from a 500 BHP, steam boiler; Reducing 430°F @ 4,198 SCFM to 305°F; Raising the temperature of 35 gpm of boiler feedwater from 210°F to 247°F.

Installation: ceiling suspension



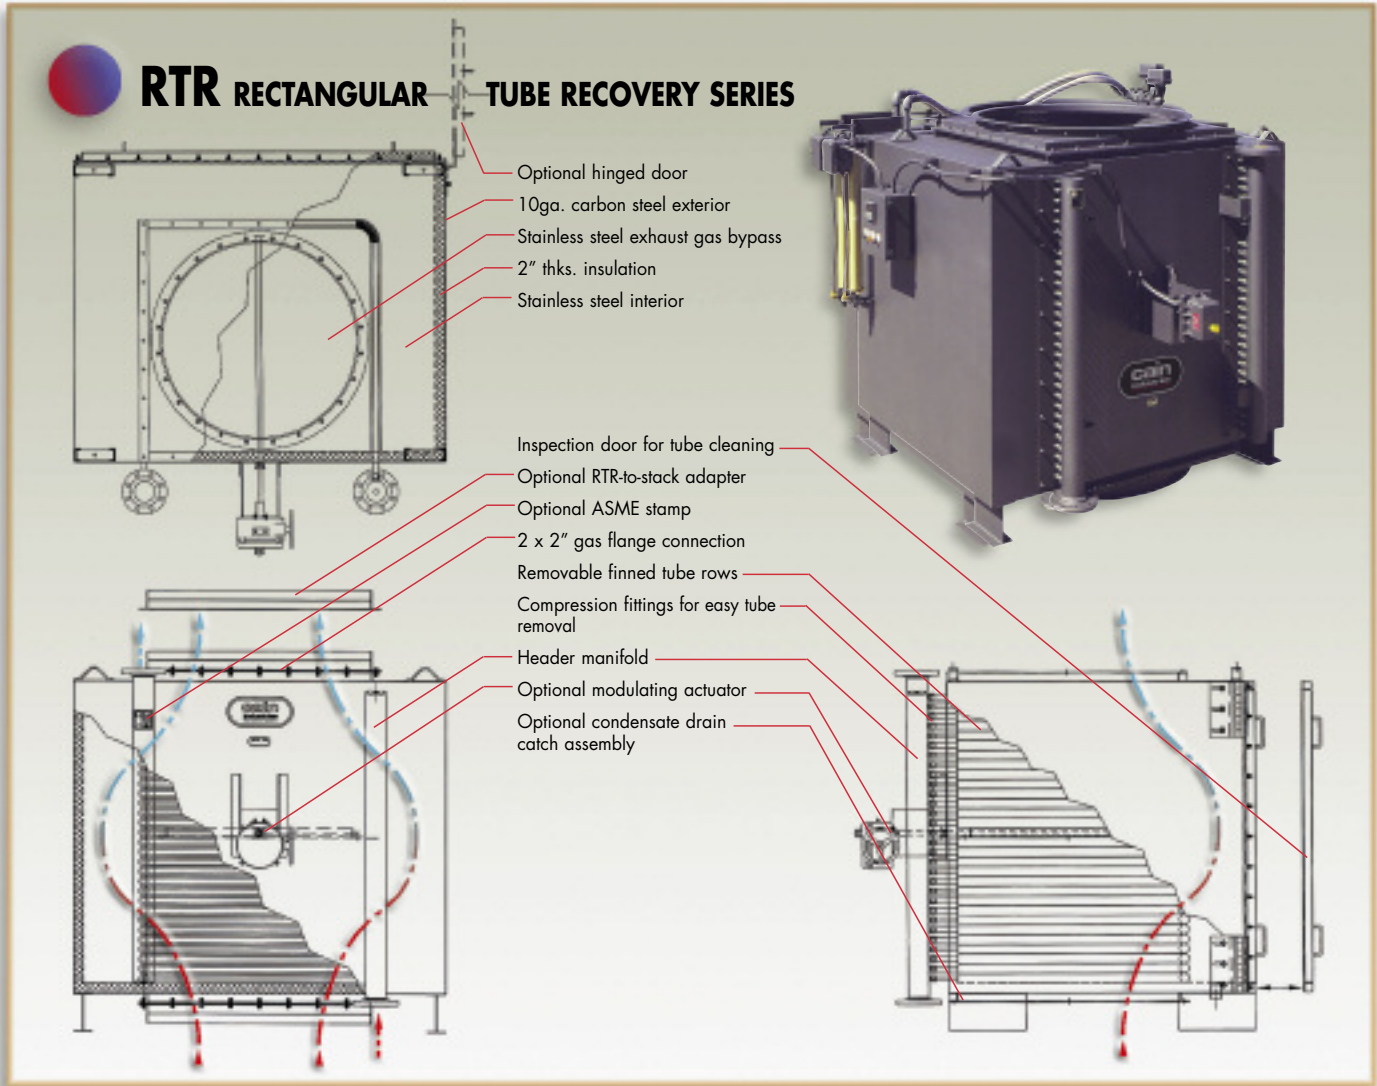

INSTALLATION FOR EXACT FIT

In many cases, the RTR is designed to replace a competitor's unit. The RTR will meet or exceed the old performance and at the same time fit within the original stack connections.



BREWERY, Ontario, Canada
 (1) RTR-1V2Q28CSS recovering Btu from (1) 95,000 pph steam boiler; Reducing 505°F @ 24278 SCFM to 333°F; Raising 196 gpm boiler feedwater entering at 225°F to 278°F.

VARIETY

One feature of the RTR product line is the large variety of sizes and configurations that are available. Cain Industries routinely produces RTR models that range in application size from small 50 hp boilers to massive 250,000 pph boilers. In addition, RTR units can be engineered to function in a horizontal or vertical stack, and can be outfitted with optional automatic sootblowers.



DELIVERY

Cain Industries keeps strict control over production and delivery scheduling so our customers receive their heat recovery equipment on time and on budget. We routinely ship regionally, nationally and internationally and keep you informed every step of the way.



(5) RTR model economizers are loaded on a flatbed and are ready for delivery to our customer.

RTR: SPECIFICATION

A general specification, shown as a guide for design & construction. (see *Engineering Sales Manual* for detailed specification data sheets)

1.0 General Design:

- 1.1 Furnish and install a rectangular tube recovery (RTR) in the exhaust duct of the boiler in accordance with the following specifications as designed and manufactured by Cain Industries, Inc.
- 1.2 The RTR shall be a light weight design for easier installation, rectangular with counterflow heat transfer design manufactured and tested in accordance with the requirements of Section VIII, Division 1 of the ASME Boiler and Pressure Vessel Code, and stamped to a minimum 250 PSIG design pressure to the appropriate section.
- 1.3 Each RTR shall be designed to include as standard, a stainless steel, internal, Flue Gas Bypass Diverter to provide for full emergency by-pass, requiring no additional ductwork for controlling:
 1. Stack corrosion,
 2. Turn down performance,
 3. Back pressure.
- 1.4 The RTR shall have removable, gas-tight inspection panels, providing complete access to the entire heating surface for inspection, tube removal, and/or cleaning (optional hinged doors available).
- 1.6 The RTR must be capable of being drained completely when mounted in the vertical or horizontal position.
- 1.7 Header manifolds for low liquid flow pressure drop shall be provided and shall have connections, screwed or flanged as specified. Liquid inlet and outlet pipe connections greater than 2" NPT shall be flanged. The liquid header manifolds shall also contain 3/4" NPT connections for venting, draining, and/or safety relief valves as required.
- 1.8 The design of the vessel itself shall be such that *no tube to tube, or tube to header joint welds shall be in contact with the exhaust stream so as to minimize potential vessel failure.*
- 1.9 The finned tubing shall be a single row design (maximum 2 row depth in the direction of the exhaust flow) for ease of cleaning and inspection. Tube to header joint shall be compression tube fittings requiring no welding for fast/easy tube replacement.

2.0 Construction:

- 2.1 Design Pressure (water side): 250 PSIG @650°F.; Test Pressure: 375 PSIG; Max. Flue Gas Inlet Temperature: (see below); Design Pressure (exhaust side): 10 inches water column
- 2.2 Tube & Fin Designs:
 - SA178GrA ERW x 1.0" OD x .085" wall thks. with carbon steel .030 Fin thks x .50 Hgt Nickel Brazed/welded to the tube. (Max. Flue Gas Inlet Temperature: 1250°F)
 - TP316L x 1.0" OD x .065" wall thks. with aluminum .020 fin thks x .50 hgt AL-FUSE™ bonded to the tube. (Max. Flue Gas Inlet Temperature: 750°F)
 - TP316L x 1.0" OD x .065" wall thks. with 304 stainless steel .020 Fin thks x .50 Hgt Nickel Brazed/welded to the tube. (Max. Flue Gas Inlet Temperature: 1800°F)
- 2.3 Compression fitting design: 1000 PSI @ 400°F.
- 2.4 Headers: thickness: Sch 80; material: SA106 GrB
- 2.5 2" thickness factory installed, high temperature insulation shall be contained within the exterior less the liquid headers.
- 2.6 Exterior surfaces shall be 10ga. carbon steel seam welded and the inner casing shall be 304 stainless steel.
- 2.7 Special codes (optional): design specifications of ASME Code: Section VIII Division I; 'UM', 'U', or 'S' symbol; National Board registered; CRN.

3.0 Optional System Component Equipment:

(see *Engineering Sales Manual* for optional equipment specifications)



Vertical flow RTR shown with optional timed automatic sootblower assemblies. This unit uses three sets of traveling carriages with high velocity cleaning nozzles.




EXHAUST STACK ADAPTERS

allow the RTR to provide maximum heat recovery while mating perfectly with an existing exhaust stack sizes. Adapters also allow the rectangular RTR to work with a round exhaust stack.



REMOVABLE ACCESS DOORS

provide a complete view of the finned tube heating surface for inspection, repair or maintenance. This reduces down time and labor expenses.

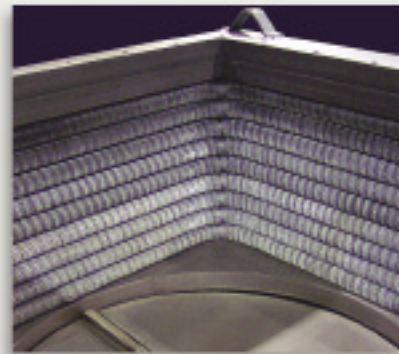

MOUNTING FLANGES & ADAPTERS

are integral to the Cain Industries economizers, reducing installation time and providing a superior connection between the existing stack and the Cain unit.

EXTERIOR LIQUID MANIFOLDS

maintain very low liquid pressure drop, eliminating the need for extra pumps/HP. This manifold is connected to the finned tubes with Swagelok® compression fittings which allow a finned tube to be removed for inspection or replacement without requiring any welding.

SINGLE ROW FINNED TUBING


design (maximum of 2 rows in the path of the exhaust flow) allows full access to the entire heating surface and provides ease of cleaning and maintenance. Each finned tube row has *no welds in the exhaust gas stream* which greatly minimizes the chance of tube failure.

BYPASS DAMPER

allows the amount of exhaust gas diverted through the economizer to be modulated to achieve desired heat recovery. This becomes an important safety feature when you recover more heat than required by the existing system.

TIMED AUTOMATIC SOOTBLOWER

The exclusive Cain Industries Timed Automatic Sootblower design is applied where sulphur content is high or combustion is poor. The special flood-jet type nozzles achieve maximum cleaning velocity using steam or air discharged through an electric control valve. Together they form a "continuous knife edge concentrated spray pattern" surrounding the heating surface. This "ring nozzle assembly" is attached to a manifolded flexible steel hose assembly and is powered back and forth by a pneumatic drive cylinder. Dual timing relays allow full control of cycle duration and interval. Cleaning the finned tubing ensures maximum Btu recovery and maximum cost savings. Fouled finned tubing can reduce heat recovery by up to 50%.

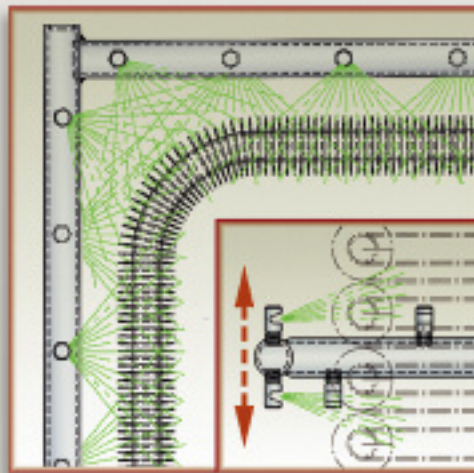

Proper sootblowing is necessary when fuel has a high sulphur content or combustion is poor (such as No. 6 fuel oil). Without sootblowing, the finned tubing will become fouled and the maximum heat recovery cannot be achieved.

The traveling Ring Assembly with Flood-Jet Nozzles, form a unique high velocity knifing action to allow full penetration of the complete heating surface. The Cain Industries sootblowing system is unsurpassed in the marketplace for effectiveness and efficiency.

Built-in timing relays allow you to customize the interval and duration to suit your application.

FIN TUBE RECOVERY SERIES

The FTR is a cylindrical economizer with header manifolds for low liquid side pressure drop. It can be used in applications with confined area restrictions. Heating surfaces are offered in stainless, carbon, or AL-FUSE™ finned tubing. The large number of standard models provide height and diameter combinations that work in applications with space constraints, while still achieving maximum heat recovery. Stack-to-FTR adapters are required when the gas connection diameters do not match. The FTR unit is selected over the FCR when low liquid side pressure drops are required or when there are large volumes of flue gas available. Flexibility allows specific engineering requirements to be met, such as fin spacing for fouling conditions and low gas pressure drops.

COMBUSTION SOURCES

Steam boilers, hot water boilers, hot oil heaters, combustion sources with round stack diameters 14"-72" and liquid flow rates of 50-500 gpm.

FEATURES

- Mounting flanges for bolting to mating flanges or adapters
- Header manifold for high liquid flow rates
- Hinged stainless steel access door panels
- Quick release tension latches for doors
- Manual bypass control lever
- Stainless steel internal bypass assembly
- Internal thermal expansion design
- Optional sootblower assembly

- Large gas volume
- Low liquid side pressure drop,
- Space constraints




The FTR has standard hinged, stainless steel access doors with quick release tension latches. It is ideal for large volumes of flue gas while minimizing liquid side pressure drops.



HOSPITAL, Flint, Michigan
 (2) FTR-160E28SSS each recovering Btu from (1) 435 BHP steam boiler;
 Reducing 450°F @ 4251 SCFM to 279°F; Raising 30 gpm boiler
 makeup water entering at 50°F to 109°F.

Boiler Exhaust Application

- Capacity: 100 - 30,000 SCFM
- Entering gas temps: 325°F to 1,400°F
- Heat sink types: Boiler feedwater, makeup water, process water, hot water return, potable water, thermal fluids, run-around systems

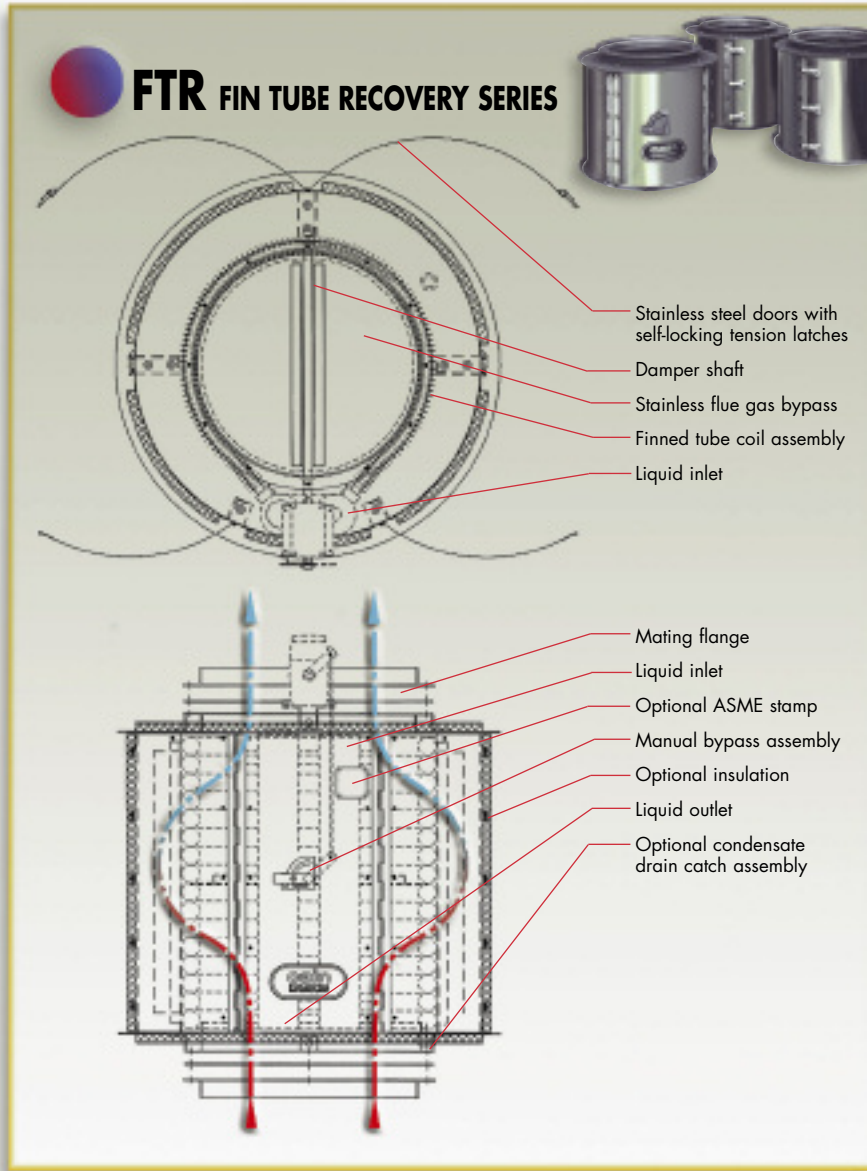

THE CAIN ADVANTAGE


Cain Industries can provide you with the ultimate heat recovery solution: lightweight design, smaller, more efficient, more cost effective. Each unit is engineered to maximize your heat recovery and thus your return on investment. Size options, finned tube configurations, and finned tube material options allow Cain engineers to specify economizers that will work in applications that have size and access limitations. This flexibility makes Cain the best choice for retrofit installations as well as new construction.



The large selection of standard FTR models makes it possible to provide a system that accommodates overall diameter and height constraint considerations.



Quick release tension latches provide easy access to the finned tube core without the use of tools.

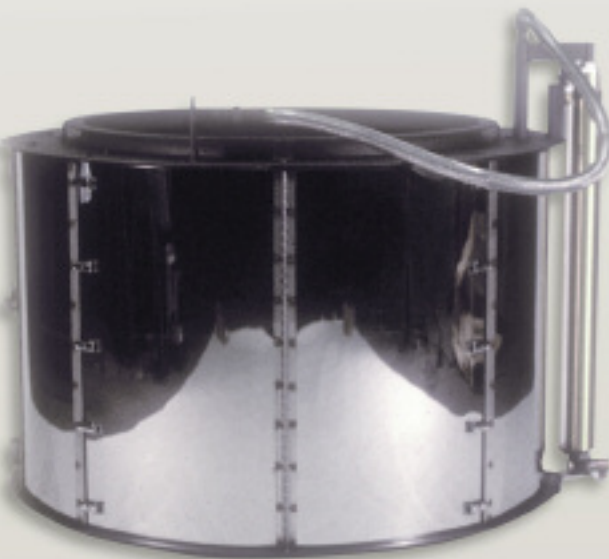

FTR (left) shown with optional sootblower and pneumatic drive cylinder - recommended when sulphur content is high and/or combustion efficiency is poor. Fouled finned tubing can reduce heat recovery by up to 50%. The sootblower is also applied when it is not cost-effective to open inspection doors and clean the exchanger by other means. The timed automatic sootblower system will continually keep the heating surface at a high performance level and reduce the day-to-day operator expense and facility down time.



Stainless steel hinged access doors allow for rapid and easy inspection and maintenance of the FTR, which in turn lowers your operating costs.

FIN COIL RECOVERY SERIES

The FCR is a custom-designed heat exchanger which can be applied in confined areas, and is offered in stainless steel, carbon steel, or AL-FUSE™ finned tubing. Design flexibility allows specific engineering requirements to be met such as fin spacing for fouling conditions and low gas pressure drops.

COMBUSTION SOURCES

Steam boilers, hot water boilers, hot oil heaters, combustion sources with round stack diameters 4"-36" and a maximum liquid flow rate of 50 gpm.

FEATURES

- Internal thermal expansion design
- Cylindrical heat transfer coil(s) design
- Mounting flanges for bolting to mating flanges
- Quick release tension latches
- Stainless steel internal bypass
- Condensate drain catch ring assembly
- Hinged stainless steel access door panels

Custom designed to meet space and performance demands



FCR shown with optional sootblower assembly

OPTIONAL EQUIPMENT

- Exclusive manual or timed automatic ring-type sootblower assembly
- Stack corrosion control assembly including temperature-regulated modulating exhaust gas bypass and remote indicators
- Circulating pump kit to maintain desired liquid flow rate
- Vertical pressurized storage tank, to create a "bulge" or temporary heat sink in the event of no-water-flow conditions
- Feedwater preheater corrosion control assembly designed to maintain the desired water inlet temperature to the economizer - preventing cold-end corrosion at the heat transfer surface



WASTE WATER TREATMENT PLANT, Fond du Lac, Wisconsin
(2) FCR-1J2D25ALS each recovering Btu from (2) 150 BHP steam boilers; Reducing 700°F @ 1603 SCFM to 246°F; Raising 18 gpm boiler feedwater entering at 100°F to 201°F.

Boiler Exhaust Application

- Capacity: 50 – 10,000 SCFM
- Entering gas temps: to 1,400°F
- Heat sink types: Boiler feedwater, makeup water, process water, potable water, thermal fluids, run-around systems

FCR: SPECIFICATION

A general specification, shown as a guide for design & construction. (see *Engineering Sales Manual* for detailed specification data sheets)

1.0 General Design:

- 1.1 Furnish and install economizers on each of the combustion sources (boilers, hot water heaters, hot oil heater, fume incinerator, etc.) as designed and manufactured by Cain Industries, Inc.
- 1.2 The Economizer shall be a light weight design for easier installation, cylindrical with counterflow heat transfer design manufactured and tested in accordance with the requirements of Section VIII, Division 1 of the ASME Boiler and Pressure Vessel Code, and is stamped to a minimum 250 PSIG design pressure.
- 1.3 Each Economizer shall be designed to include as standard, a stainless steel, internal, Flue Gas Bypass Diverter to provide for full emergency by-pass, requiring no additional ductwork for controlling:
 1. Stack corrosion,
 2. Turn down performance,
 3. Back pressure.
- 1.4 Each Economizer shall have continuous hinged, gas-tight, stainless steel inspection panels, which provide for complete access to the entire heating surface for inspection and/or cleaning. The inspection panels shall be secured by adjustable, quick release tension latches and no tools shall be required for the opening of the inspection panels.
- 1.5 Heat Recovery unit shall be either a single, multiple, or parallel coil design and must be completely drainable when mounted vertically.
- 1.6 Header manifolds where used shall be SA53 GrB schedule 80 or SA105, connections shall be screwed or flanged as specified.
- 1.7 Exterior surfaces other than stainless steel shall be primed and painted with a high temperature metallic paint rated for 1000°F.

2.0 Construction:

- 2.1 Design Pressure (water side): 250 PSIG @650°F.; Test Pressure: 375 PSIG; Max. Flue Gas Inlet Temperature: (see below); Design Pressure (exhaust side): 10 inches water column
- 2.2 Tube & Fin Designs:
 - SA178GrA ERW x 1.0" OD x .085" wall thks with carbon steel .030 Fin thks x .50 Hgt Nickel Brazed/welded to the tube. (Max. Flue Gas Inlet Temperature: 1250°F)
 - TP316L x 1.0" OD x .065" wall thks. with aluminum .020 fin thks x .50 hgt AL-FUSE™ bonded to the tube. (Max. Flue Gas Inlet Temperature: 750°F)
 - TP316L x 1.0" OD x .065" wall thks. with 304 stainless steel .020 Fin thks x .50 Hgt Nickel Brazed/welded to the tube. (Max. Flue Gas Inlet Temperature: 1800°F)
- 2.3 Headers: thickness: Sch 80; material: SA53 GrA and/or 2000# Forged Steel
- 2.4 Exterior surfaces shall be 10ga. A36 Carbon Steel seam welded and the inner casing shall be 304 stainless steel.

3.0 Optional System Component Equipment:


(see *Engineering Sales Manual* for optional equipment specifications)

FCR FIN COIL RECOVERY SERIES



SINGLE PASS


DOUBLE PASS

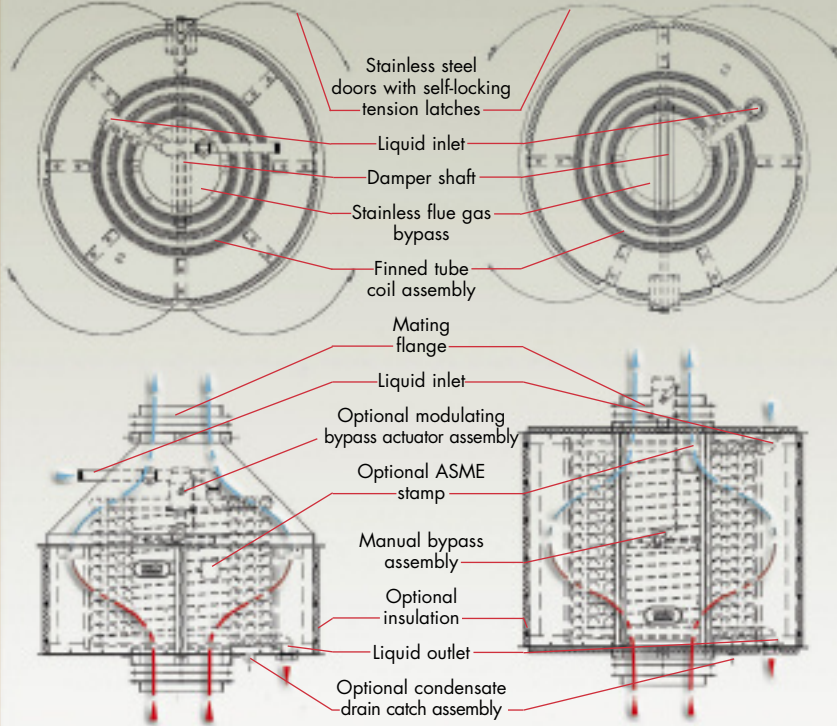

PRINTING FACILITY, Lomira, Wisconsin
 (2) Model: FCR-1L2C16ALS each Recovering Btu from a 500 BHP steam boiler; Reducing 400°F @ 4205 SCFM to 252; Raising 34.5 gpm boiler feedwater entering at 120°F to 164°F.

BEFORE AND AFTER

A Cain Industries FCR boiler economizer can often be installed in-line with your existing stack, resulting in a relatively quick and cost-efficient installation process with minimal retrofitting, labor, materials and down time. Generally, because of their lighter weight and smaller size, the FCR requires little, if any, additional support (usually suspended from the ceiling). In applications where additional support is required, Cain Industries can offer a structural support stand. Economical in-line installation - another Cain Advantage.

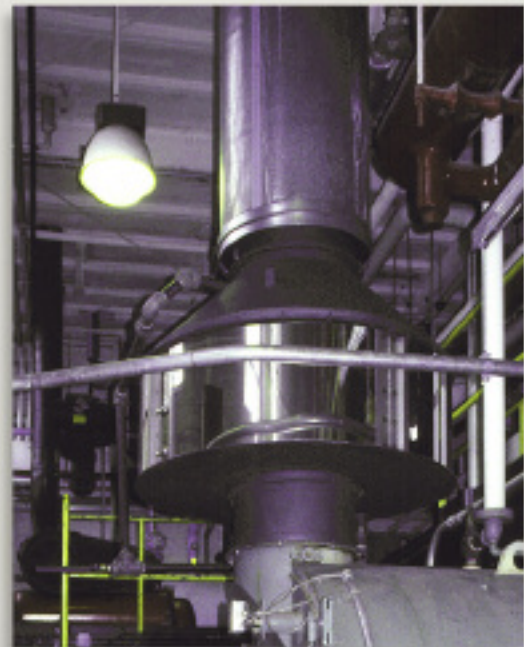

B SERIES

The B Series boiler economizer is comprised of 14 standard models. An "off the shelf" unit, it is designed primarily for boilers with round stacks and a combustion capacity of 40 to 800 BHP with entering gas temperatures between 300° and 700°F. The standard stack connections can be easily modified to fit specific boiler stacks with 10" to 34" diameters, alleviating the cost of stack adapters. The units come standard either with 4 or 6 fins per inch (fpi) spacings for operation with No. 2 fuel oil and/or natural gas, and depending on the efficiency of the combustion. With its lightweight design and exclusive AL-FUSE™ heat transfer surface, installation is fast and costs are kept to a minimum. Use the chart on the next page to select the B Series unit that is best suited to your application.

COMBUSTION SOURCES

Steam boilers, hot water boilers

FEATURES

- Hinged stainless steel access door panels
- Internal thermal expansion design
- Mounting flanges for bolting to mating flanges or adapters
- Stainless steel internal exhaust bypass assembly
- Quick release tension latches for doors
- Optional sootblower assembly

- *Minimum cost*
- *Easy Installation*
- *Maximum savings*



B Series single-pass unit with stack adapter cone




Boiler rooms of all sizes and with limited installation space, horizontal or vertical, can be accommodated with the cylindrical B Series or FCR economizer product lines.

Boiler Exhaust Application

- Capacity: 40 to 800 BHP
- Entering gas temps: 300°F to 700°F
- Heat sink types: Boiler feedwater, makeup water, hot water return, hot water storage tank, condensate tank, process water, potable water




B BOILER ECONOMIZER SERIES

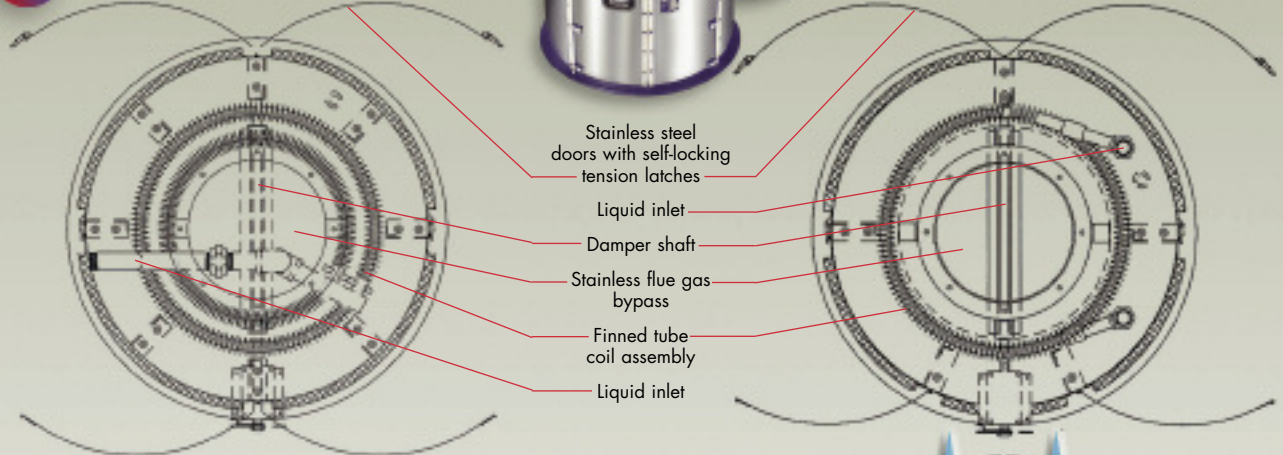

- Stainless steel doors with self-locking tension latches
- Liquid inlet
- Damper shaft
- Stainless flue gas bypass
- Finned tube coil assembly
- Liquid inlet

SINGLE PASS

DOUBLE PASS

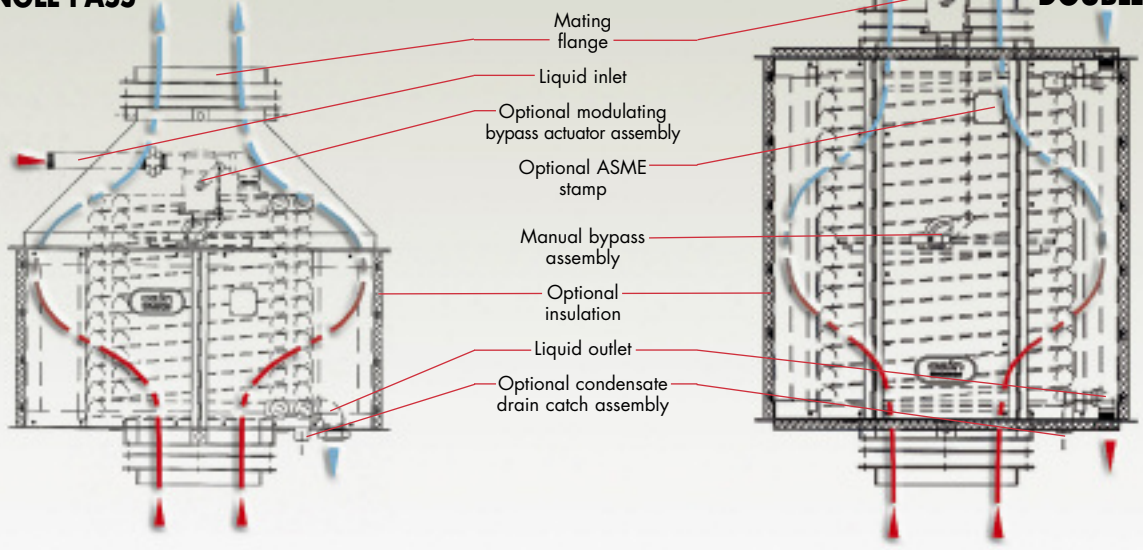

- Mating flange
- Liquid inlet
- Optional modulating bypass actuator assembly
- Optional ASME stamp
- Manual bypass assembly
- Optional insulation
- Liquid outlet
- Optional condensate drain catch assembly

B SERIES MODEL SELECTION

Model	BHP	H.S.		Dia.	Height	Weight in LBS	Stack Flange Conn.			Water Conn. NPT	Sootblower Conn.	Drain Catch Ring Conn.	Total Weight. w/Insulation & Stblr.
		6FPI	4FPI				ID	B.C.	Qty. Holes				
B04	40	91	N/A	30	15.5	175	12	14	8	1	N/A	1/2	210
B07	70	126	N/A	30	19.5	190	12	14	8	1	N/A	1/2	250
B10	100	72	119	36	23.5	220	12	14	8	1	N/A	1/2	300
B12	125	218	151	36	27.5	260	16	18	8	1	N/A	1/2	345
B15	150	263	182	36	31.5	300	16	18	8	1	N/A	1/2	390
B20	200	384	265	42	24.5	350	20	21 3/4	12	1 1/4	1	N/A	450
B25	250	486	336	42	28.5	390	20	21 3/4	12	1 1/4	1	N/A	490
B30	300	635	440	48	30.0	440	24	25 7/8	12	1 1/2	1 1/4	N/A	550
B35	350	720	498	48	32.0	485	24	25 7/8	12	1 1/2	1 1/4	N/A	600
B40	400	805	557	48	34.0	550	24	25 7/8	12	1 1/2	1 1/4	N/A	645
B50	500	932	645	48	38.0	590	24	25 7/8	12	1 1/2	1 1/4	N/A	700
B60	600	1059	733	48	42.9	650	30	32 3/8	16	1 1/2	1 1/4	N/A	760
B70	700	1186	821	48	46.0	690	30	32 3/8	16	1 1/2	1 1/4	N/A	830
B80	800	1313	909	48	50.0	750	30	32 3/8	16	1 1/2	1 1/4	N/A	890

ENERGY MANAGER SERIES

The EM is designed to recover heat from combustion sources with atmospheric burners from 200 to 6400 MBH. Ten standard models are designed to operate with low static gas pressure drop for safe, automatic operation on atmospheric or power burners.

COMBUSTION SOURCES

Steam boilers, hot water boilers, dryers, ovens

FEATURES

- Built to rigid CSA quality control standards
- Highest heat transfer efficiency with AL-FUSE™ finned tubing
- Quick release access door latches for ease of maintenance/inspection
- Packaged design includes all basic control hardware to properly operate unit in the field
- Adjustable internal stainless steel damper and diverter
- Guaranteed heat recovery performance

*The only product
of its kind with
CSA Certification*



Canadian Standards Association International Laboratories Design Certified
(Replaces AGA, American Gas Association Laboratories Design Certified)

EM Series package includes all basic control hardware for simplified installation, and includes CSA certification





College Campus, Long Beach, California
(10) EM Series boiler economizers preheating hot water return loops.

Boiler Exhaust Application

- Capacity: 200,000 to 6,400,000 Btu/hr input
- Entering gas temps: 300°F to 700°F
- Heat sink types: Boiler feedwater, makeup water, hot water return, hot water storage tank, condensate tank, process water, potable water

- Slip-fit gas connections
- Temperature Controlled Pump controller
- Internal stainless steel bypass to modulate heat recovery as needed
- Single row finned tubing for maximum efficiency and ease of cleaning
- Quick-release tension latches do not require tools
- Stainless Steel hinged access panels minimize labor and downtime during inspection, cleaning or repair
- Includes circulating pump package: In-line circulating pump, inlet and outlet temperature gauges, check valve, relief valve, flow control valve, differential pump control

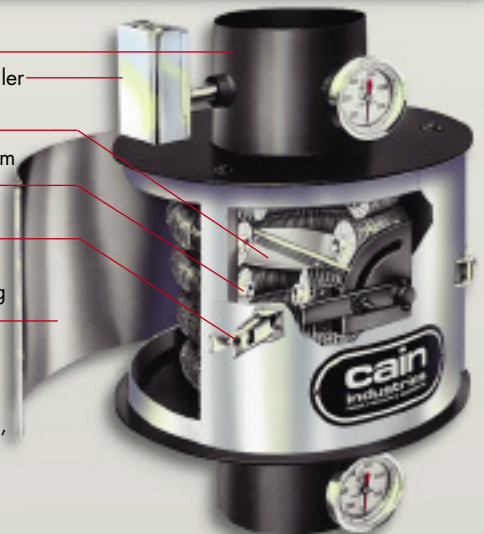

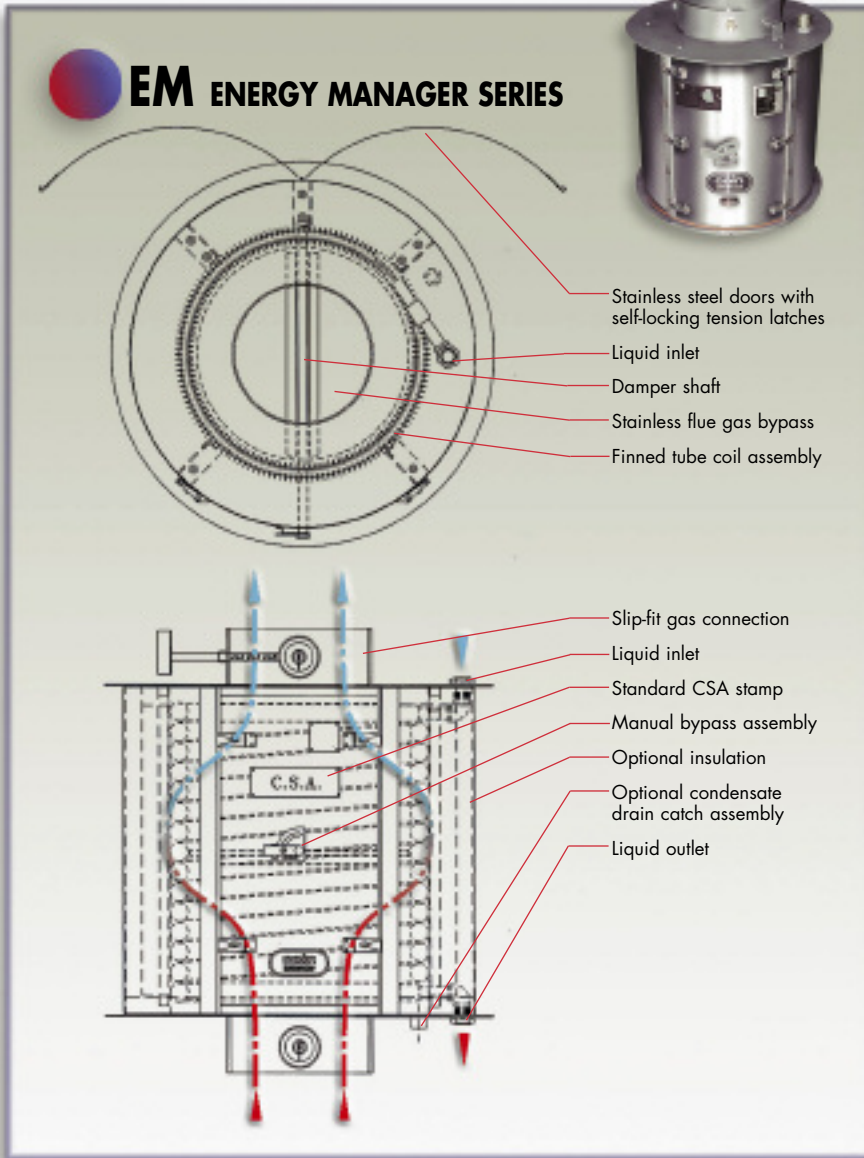

Condominium Complex, Milwaukee, Wisconsin
EM Series economizer, on top a domestic hot-water heater, preheating municipal water.



Industrial Laundry, Fresno, California
(2) EM Series, boiler economizers, preheating boiler feedwater for (2) 115 BHP Parker steam boilers.

EM SERIES MODEL SELECTION

The following model selections are determined by stack diameters and Btu/hr input, using this simple selection chart. After the correct Energy Manager has been selected, contact your Cain representative to determine your fuel savings and provide a complete proposal with payback period. Stack diameters smaller than standard EM sizes can be accommodated simply with a pair of EM Model to Stack Transitions.

Model No.	Burner Input (Btu/hr)	Stack Diameter
EM-6	200,000	6"
EM-8	400,000	8"
EM-10	600,000	10"
EM-12	800,000	12"
EM 14	1,250,000	14"
EM-16	1,600,000	16"
EM-20	2,500,000	20"
EM-24	3,600,000	24"
EM-28	5,000,000	28"
EM-32	6,400,000	32"



SYSTEM COMPONENTS

Cain Industries offers a wide range of system components, pre-engineered specifically for each application. Every product has been tested, shown to be of the highest quality, and proven to be fully compatible with all Cain heat recovery products.

MATING FLANGES, AND GASKETS

Cain offers round, square, and rectangular mating flanges, transitions, and gasket sets to suit most any application. Flanges are black steel, or stainless steel where appropriate.

CIRCULATING PUMP KIT ASSEMBLY

Cain offers all necessary pumps and related fittings for your heat recovery application – whether you need Shut off valves, Check valves, Relief valves, Vent valves, Steam Stop valves, Pressure or Temperature Control valves, or Drain valves.

DRAIN CATCH RING ASSEMBLY

This assembly safely drains away possible condensation accumulating within the economizer or stack, on the outlet of the economizer. Includes various NPT drain connection sizes, depending on application.

SUPPORT STANDS

Cain offers structural steel support stands that easily bolt together for low cost and ease of field assembly.

LIQUID TEMPERATURE CONTROL

Cain Industries offers a sophisticated liquid temperature control which functions as follows: During a cold startup, the exhaust bypass will be powered to the normal operating position. As the liquid temperature rises and approaches a preset point, the Liquid Temperature Control signals the exhaust bypass damper which will begin to move to the temperature control position. When the desired temperature is completely satisfied, the damper actuator will move to the maximum open position. The heat recovery can be reduced by up to 50%. Included is a 4-20mA output controller, thermocouple, thermocouple weld and wire, as well as a modulating bypass actuator installed, wired, and tested (for a single 120 volt, 1ph, 60 hz connection).


STACK CORROSION CONTROL ASSEMBLY

This assembly includes: Control panel with digital controller, modulating damper actuator and thermocouple. The Cain Stack Corrosion Control assembly senses a minimum exhaust gas temperature leaving the economizer. During a cold startup, the damper will be powered to the "Maximum Open Position". As the temperature rises above a preset minimum temperature, the damper will begin to close to the "Normal Operation Position". As the percent of exhaust load conditions fluctuate to lower outputs, the damper actuator will open accordingly to maintain a minimum preset outlet "Temperature Control Position".




RTR Control panel shown with optional Modulating Bypass Damper Actuator which powers the damper to the desired position for maximum heat recovery.

Circulating Pump

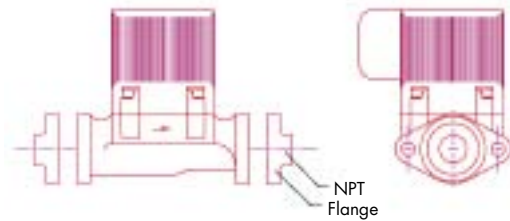

Flow Control Valve




Check Valve




Relief Valve




Pump Controller

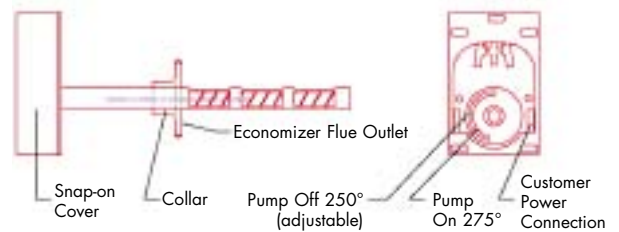

Thermometers

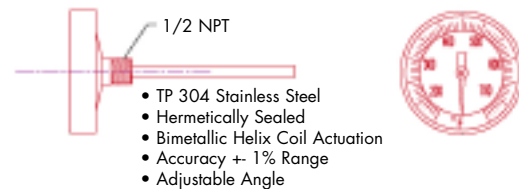

Stack Corrosion Control Assembly

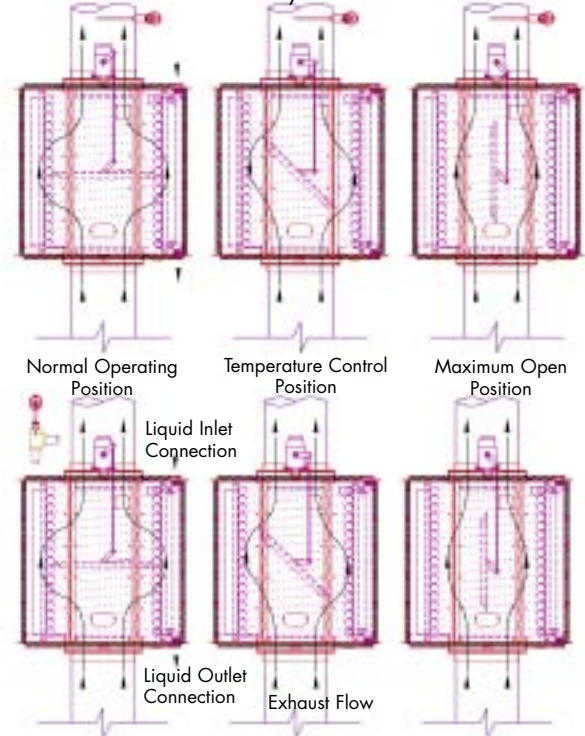

Liquid Temperature Control Assembly (above)

REPLACING THE COMPETITION

Beyond the 5 boiler economizer product lines including over 500 boiler exhaust economizers, the 'unique application' is no problem. Our team concept with the specifying engineer provides the solutions for the complete engineered system. These systems have ranged from modifying the RTR model to all stainless for condensing natural gas combustion below 150°F to preheating boiler feedwater from coal fired boilers or pulverized wood burning boiler exhaust.

Impossible to some, but for one of the largest hospitals in Manhattan we designed and manufactured a large customized RTR unit that could be shipped in small components and reassembled in the field. The objective was to provide a boiler economizer which would retrofit the exhaust of two of the five 125,000 pph boilers as located 3 stories below the street. All the components were shipped on two flat bed trucks. Upon jobsite arrival the components were manually carried down through a 3x3 foot square manway in the middle of the sidewalk. They were then assembled together as a single 250,000 pph boiler economizer within the two boiler's manifolded exhaust breaching. Since the boiler feedwater piping had been completed prior, the installation was finished in two weeks!



The horizontal RTR shown above was custom engineered and manufactured to replace a competitor's unit that failed. One of the problems causing the failure was poor performance due to an ineffective sootblower. Cain's exclusive timed automatic sootblower provides total control for blowdown intervals to accommodate the specific soot buildup of every application. This unit was also designed to exactly match the exhaust flange dimensions and overall size for easy replacement.

The vertical RTR unit to the left also replaced a failed competitor's unit and was constructed to be a replacement fit and offer greater performance. ASME designed at 750 PSIG this RTR is rated for a 150,000-lb/hr steam boiler. With an exhaust gas flow rate of more than 36,000 SCFM, it saves the end user over \$450,000 each year in fuel costs.

We engineer and manufacture combustion heat recovery systems for just about every type of combustion source. This ranges from the small multi-family residential natural draft boilers to the large high pressure industrial boiler feedwater preheater systems.

Whether you need a single straight forward economizer, or you are planning a complex process application, we would like to discuss the ways that Cain Industries can dove-tail our engineering skills to meet your needs.



EXCLUSIVE OPTIONAL TIMED AUTOMATIC SOOTBLOWERS

The exclusive Cain Industries Timed Automatic Sootblower design is applied where the sulphur content is high and/or combustion efficiency is poor. When a soot layer accumulates on the heating surface to a thickness of 1/8", fuel consumption is increased by 8.5%. The sootblower is also applied when it is not cost-effective to open inspection doors and clean the exchanger by other means. The sootblower system will continually keep the heating surface at a high performance level and eliminate the day-to-day operator expense and operation down time.

The blowdown sequence occurs while the boiler is in full operation and

is fully adjustable. The special flood-jet type nozzles achieve maximum cleaning velocity using steam or air as discharged through an electric control valve (included).

Together they form a 'continuous knife edge concentrated spray pattern' surrounding the heating surface. This "ring nozzle assembly" is attached to a manifolded flexible steel hose assembly and powered up and down by a pneumatic drive cylinder. Dual timing relays allow complete control for cycle duration and interval specific to each application. The final results are a controlled double cleaning action, insuring that the maximum Btu recovery and anticipated savings are achieved.

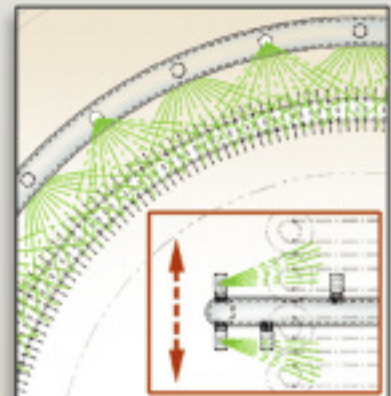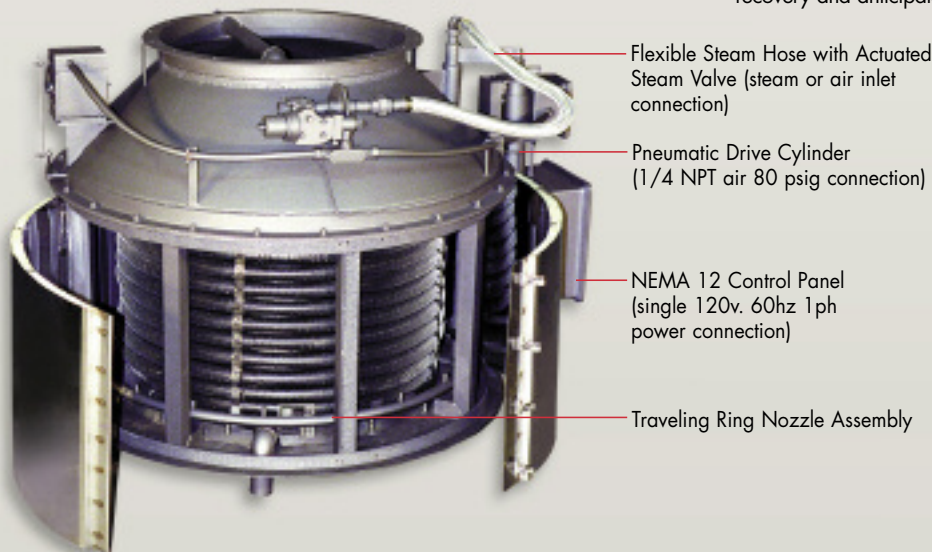


Flood-jet type nozzles together form a unique high velocity knifing action to allow full penetration of the complete heating surface.

PREHEATING BOILER FEEDWATER

Steam Boiler Exhaust


For boilers with continuous, modulating feedwater.

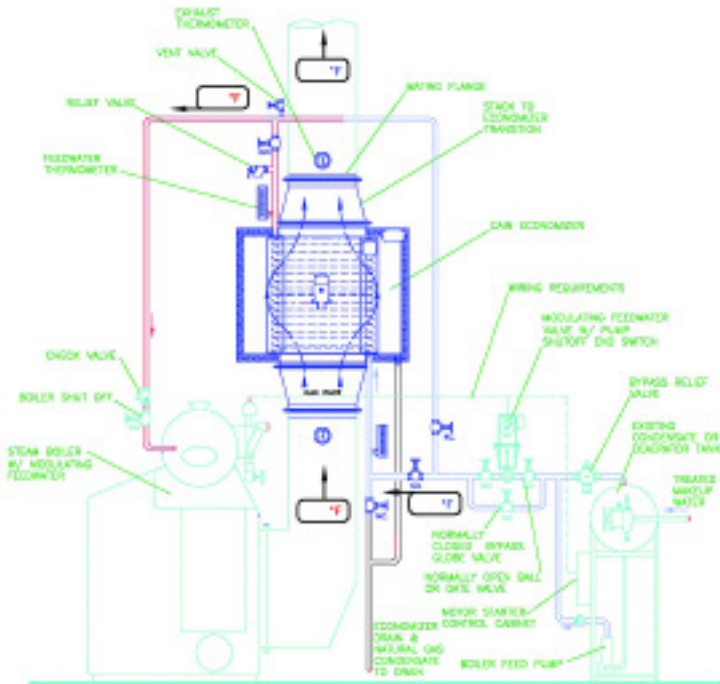

PREHEATING BOILER FEEDWATER

Firetube Steam Boiler Exhaust

For boilers with continuous, modulating feedwater.


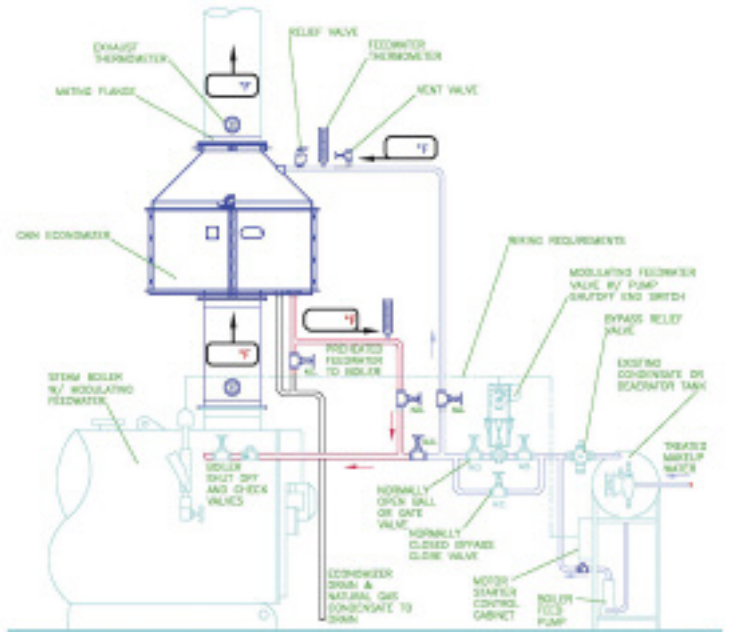


PREHEATING HOT WATER RETURN

Hot Water Boiler

PREHEATING MAKEUP WATER


Steam Boiler Exhaust
(Circulating tank system)

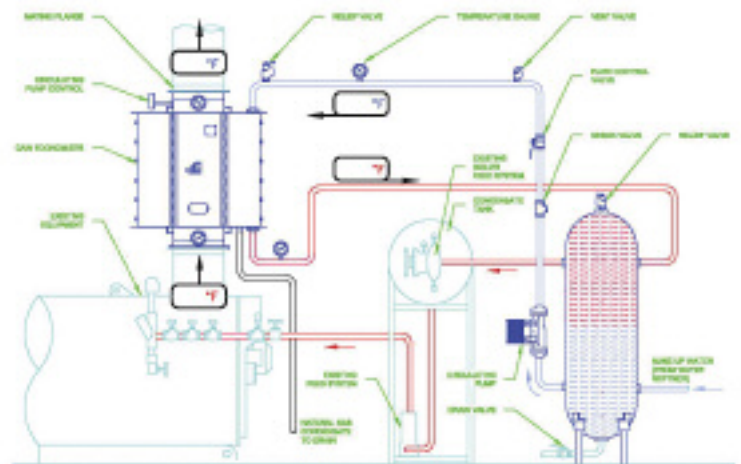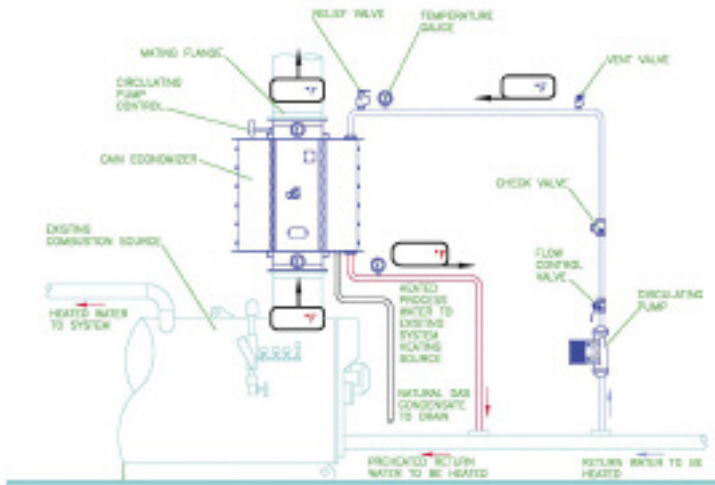

PREHEATING BOILER FEEDWATER

Water Tube
Steam Boiler Exhaust


For boilers with continuous, modulating feedwater.

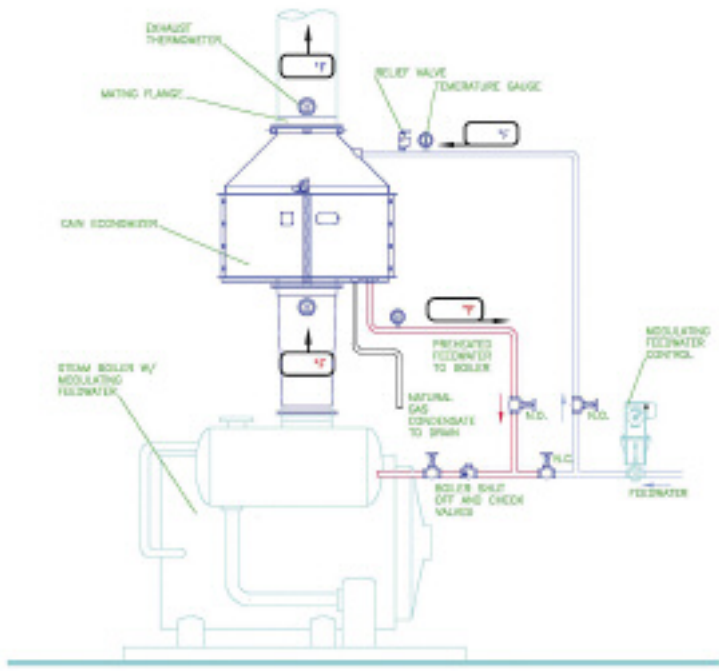

PREHEATING BOILER FEEDWATER


(Circulating tank system)
Steam Boiler Exhaust

For boilers with on/off feedwater.

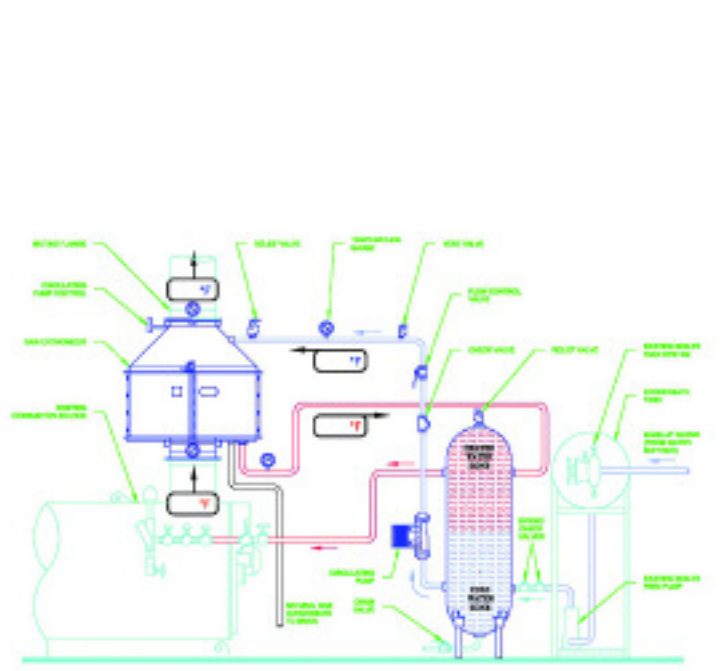


PREHEATING PROCESS WATER

Steam Boiler Exhaust
(Circulating tank system)

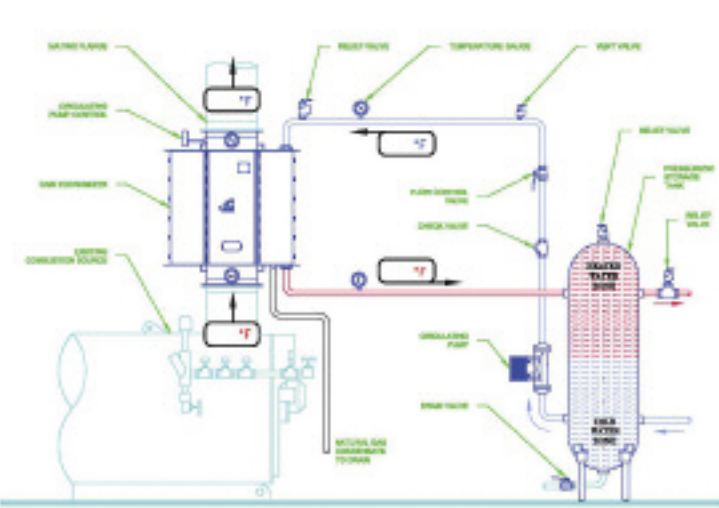

PREHEATING POOL WATER

Steam Boiler Exhaust

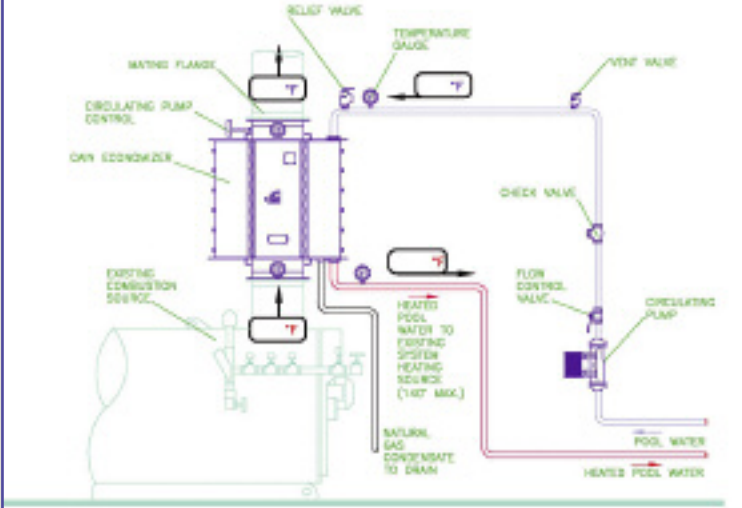

SAVINGS COMPARISON ANALYSIS

Four examples of typical combustion source types, and the results with a Cain Industries heat recovery system applied.

DATA without a Cain System

Combustion Source: 1200 BHP **Steam Boiler**
 Heat Sink.....Boiler Feed Water
 Waste Exhaust Temp.....405°F
 Water Temp. Inlet.....220°F
 Btu/hr Burner Input50,212,000
 Fuel Type.....Natural Gas
 O₂ Content.....3.5%
 Excess Air18.5%
 Combustion Efficiency.....82.8%
 Fuel Cost Per Therm\$0.80
 Annual Operating Hours.....6,000

PERFORMANCE with a Cain System

Model SelectionRTR-160H26ALS
 Boiler Feed Water Flow.....82.8 gpm
 Final Exhaust Temp.....307°F
 Water Temp. Outlet.....250°F
 Pressure Drop, Water1.0 psig
 Pressure Drop, Exhaust0.49" WC
 Btu/hr recovered1,210,000
 Btu/hr saved.....1,468,200
 Total Cost Installed.....\$38,380

Payback6.5 mo.
Annual Return on Investment 184%
Annual Savings.....\$70,472

DATA without a Cain System

Combustion Source: 800 BHP **Steam Boiler**
 Heat Sink.....Boiler Feed Water
 Waste Exhaust Temp.....470°F
 Water Temp. Inlet.....210°F
 Btu/hr Burner Input33,580,000
 Fuel Type.....Natural Gas
 O₂ Content.....6%
 Excess Air36%
 Combustion Efficiency.....79.75%
 Fuel Cost Per Therm\$0.80
 Annual Operating Hours.....6,000

PERFORMANCE with a Cain System

Model SelectionRTR-148H26ALS
 Boiler Feed Water Flow.....55.2 gpm
 Final Exhaust Temp.....335°F
 Water Temp. Outlet.....257.7°F
 Pressure Drop, Water2.0 psig
 Pressure Drop, Exhaust0.47" WC
 Btu/hr recovered1,267,000
 Btu/hr saved.....1,588,100
 Total Cost Installed.....\$37,700

Payback5.9 mo.
Annual Return on Investment 202%
Annual Savings.....\$76,229

DATA without a Cain System

Combustion Source: **1,250 kW Engine**
 Heat Sink50% Ethylene Glycol
 Waste Exhaust Temp.....968°F
 Water Temp. Inlet.....195°F
 SCFM3,667
 Fuel Type.....Natural Gas
 O₂ Content.....N/A
 Excess AirN/A
 Combustion Efficiency (relative).....78%
 Fuel Cost Per Therm\$0.80
 Annual Operating Hours.....6,000

PERFORMANCE with a Cain System

Model SelectionHRSR-336B28CSS
 Circulating Liquid Flow175 gpm
 Final Exhaust Temp330°F
 Water Temp. Outlet.....232.3°F
 Pressure Drop, Water.....8.3 psig
 Pressure Drop, Exhaust1.75" WC
 Btu/hr recovered2,864,000
 Btu/hr saved.....3,671,400
 Total Cost Installed.....\$57,960

Payback3.9 mo.
Annual Return on Investment 304%
Annual Savings.....\$176,227

DATA without a Cain System

Combustion Source: **1,700 kW Engine**
 Heat Sink.....Process Steam
 Water Exhaust Temp.....783°F
 Water Temp. Inlet.....N/A
 SCFM5,222
 Fuel Type.....Natural Gas
 O₂ Content.....N/A
 Excess AirN/A
 Combustion Efficiency (relative).....78%
 Fuel Cost Per Therm\$0.80
 Annual Operating Hours.....6,000

PERFORMANCE with a Cain System

Model SelectionESG1-620D18CSS
 Operating Steam Pressure150 PSIG
 Final Exhaust Temp428°F
 Boiler Horsepower.....68 BHP
 Equivalent Evaporation2,339 pph
 Pressure Drop, Exhaust1.55" WC
 Btu/hr recovered2,269,000
 Btu/hr saved.....2,909,000
 Total Cost Installed.....\$113,600

Payback9.8 mo.
Annual Return on Investment 123%
Annual Savings.....\$139,635

Savings comparison data is based on a conservative fuel cost per therm (100,000 Btu), and approximate annual operating hours. Your results may vary. Total Cost Installed includes: Equipment, shipping, and complete installation. Contact Cain Industries for your FREE savings analysis proposal.


MARKET SPECIFIC PRODUCT LINES

EXHAUST HEAT RECOVERY 


Gas & Diesel Cogeneration Systems




"Manufacturing Waste Heat Transfer Products To Save Energy"

EXHAUST HEAT RECOVERY 


Boiler Economizer Systems



"Manufacturing Waste Heat Transfer Products To Save Energy"

EXHAUST HEAT RECOVERY 

Fume Incineration Systems



"Manufacturing Waste Heat Transfer Products To Save Energy"

Your Authorized Cain Representative



PO Box 189
 W194 N11826 McCormick Dr.
 Germantown, WI 53022
 262-251-0051
 800-558-8690
 sales@cainind.com
 www.cainind.com