



Installs in
Seconds with
Integrated
Adjustment
System

Patents Pending

Glyder™2 is designed with the worker in mind, it's simply the safest, lightest and easiest-to-use beam anchor in the world!

- Integrated ratcheting adjustment system provides quick and easy installation and removal
- Unique guarded locking mechanism protects the anchor from accidental disengagement
- Replaceable synthetic wear pads eliminate metal-to-metal contact reducing friction which provide smooth and effortless operation
- Extremely lightweight at only 3.7 lbs. (1.66kg), with a user capacity of 420 lbs. (189kg)
- Fits I-beams from 3-1/2" to 14" (8.75-35cm) wide, up to 1-1/4" (3.125cm) thick
- Meets global standards including OSHA, ANSI Z359, ANSI A10.32, EN 795: 1996 Class B


Glyder™2 Sliding Beam Anchor

Complete Versatility and Freedom of Movement The Glyder™2 provides fall protection and complete horizontal mobility while working on structural steel such as I-beams. For complete jobsite flexibility, the device can be attached overhead or at your feet. Once installed, the Glyder™2 will effortlessly follow the worker, in fact, it's so smooth you won't even notice it. The anchor incorporates replaceable synthetic wear pads that eliminate metal-to-metal contact, reducing friction, providing smooth operation. When using this device at your feet (instead of overhead), the DBI-SALA Force2™ shock absorbing lanyard must be used. This lanyard has been specifically designed to take up to a 12 ft. (3.6m) free fall and keep forces below OSHA's limits.



Simple, Fast and Efficient Installation The Glyder™2 sliding beam anchor incorporates an integrated ratcheting adjustment system for complete ease-of-use. This unique system is built-in, with no external pins or chains that just get in your way. Glyder™2 installs in seconds, in three easy steps - Step 1: depress locking tab mechanism, Step 2: slide ratcheting hook end to fit snug against beam flange and release locking tab, Step 3: repeat for other side if desired.

Guarded Locking Mechanism for Added Safety For complete peace of mind, the ratcheting adjustment hook ends have a guarded locking mechanism. This added safety feature, protects the locking tab from being accidentally disengaged from the beam. In addition, the locking tab position is located on the side instead of the top. This design reduces the chance of it being kicked or forced open by the user's lanyard.

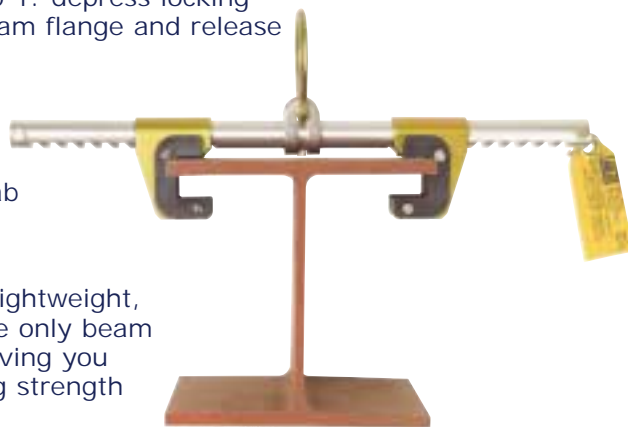

Lightweight and High Strength Design The Glyder™2 is extremely lightweight, at only 3.7 lbs. (1.66kg), it is one of the lightest in the industry. It is the only beam anchor on the market with a user capacity rating of 420 lbs. (189kg), giving you additional tool carrying flexibility. In addition, it has a minimum breaking strength of 5,000 lbs. (22kn)

Glyder™2 and Force2™ Lanyard Models:

2104700: Glyder™2 Sliding Beam Anchor, fits I-beam flanges 3-1/2" (8.75cm) to 14" (35cm) wide, up to 1-1/4" (3.125cm) thick

1225006: Force2™ Shock Absorbing Lanyard, 1" web with self locking snap hooks at each end, 6 ft. (1.8m) in length

1225176: Force2™ Twin-Leg 100% Tie-Off Shock Absorbing Lanyard, 1" (25cm) web with self locking snap hooks at each end, 6 ft. in length

Specifications:

Load Bar Material: Aluminum 7075-T651

Hook Ends Material: Alloy steel with zinc plating

D-ring Material: Carbon steel with zinc plating

Wear Pads Material: Polyethylene, U.V. stabilizer

Fits I-Beam Size: 3-1/2" (8.75cm) to 14" (35cm) wide flange, up to 1-1/4" (3.125cm) thick

Capacity: 420 lbs. (189 kg)

Weight: 3.7 lbs. (1.66 kg)

Minimum Breaking Strength: 5,000 lbs. (22 kn)

Standards and Warranty: Complies with OSHA 1910.66, OSHA 1926.502, ANSI Z359.1, ANSI A10.32 and EN 795: 1996 Class B

Glyder™2 Integrated Ratcheting Adjustment System



ISO 9001 - With a full quality assurance program certified under ISO 9001, Capital Safety supplies the industry with a quality range of safety products to provide added security. That 's why we back each of our fall protection and rescue systems with the best training, tech assistance and customer service in the business. It makes life easier for you and safer for your workers.



Capital Safety • 3833 SALA Way, Red Wing, MN 55066-5005

Phone: 651-388-8282 • Fax: 651-388-5065

Toll Free US: 800-328-6146 • Toll Free Canada: 800-387-7484

www.capitalsafety.com • Email:solutions@capitalsafety.com

Form: 9700117
Rev: A