

#850  
#856


**NIRU® CUSHION-EASE® GSII™**  
**NIRU® CUSHION-EASE® GSII™ SOLID**

SAFETY / ANTI-FATIGUE • “WET/DRY” • SUPERIOR™

- **Sales Tip:** GSII™ excels in the harshest industrial environments because it resists the chemicals, oils, and greases that cause traditional rubber matting to breakdown.
- **Where to Specify:** (#850) Intended for harsh wet environments where industrial chemicals, oils, and greases are commonly found. (#856) should be recommended for industrial applications where exposure to chemicals, oils, and grease is light to moderate.
- GSII™ technology offers the ultimate in durability and performance in the harshest environments
- 100% Nitrile rubber compound provides the highest degree of resistance to chemicals, oils, and greases while Silicon Carbide grit surface provides long lasting traction
- Available in perforated (#850), or solid top (#856) versions
  - #850 has a large hole drainage system that facilitates the removal of liquid and debris from the work area
  - #856 offers solid-top construction for additional anti-fatigue relief, and is easy to clean
- Overall thickness is 3/4 inch
- Modular design is compatible with NoTrax® #551 M.D. Ramp System® and can accommodate a variety of custom configurations (see page 24 for more information)



**Grit Detail**

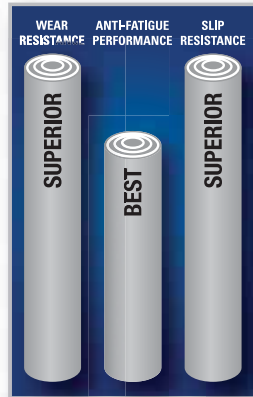

RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NOTRAX® INDUSTRIAL MATS



Part of the Solutions™ product line. See pages 30 – 31 for details.

**Solutions™**  
BY NOTRAX®

**#850/856 Niru® Cushion-Ease® GSII™/GSII™ Solid**

Stock Size	3' x 3'	3' x 5'
Weight (lbs.) #850	24	42
Weight (lbs.) #856	30	N/A

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



#850