

Caps, Adapters and Spanner Wrenches



1515

1515

Female to male adapter. Adapter moulded from the same tough, red, polycarbonate material as U.F.S. Nozzles

Sizes available: 1 1/2" female - NPSH (SIPT), 1 1/2" male - NHT




2515

2515 Reducing Adapter

moulded from the same tough, red, polycarbonate material as U.F.S. Nozzles . It is strong, durable and with no scrap value, stays on the job

Sizes available 2 1/2" female inlet: NHT, NY(FD), NY Corp., Chicago(FD), Det.(FD), B.C. and A.M.A. (8 X 3), CSA (5 X 3 1/8")

1 1/2" male outlet: NHT, NPSH (SIPT), NY(FD)



2501

2501 Adjust-A-Plug

Here's an inexpensive protective plug for swivel connections up to 2 1/2" in diameter. It features two adjustable metal plates installed in the back of the plug, that can be easily mated with your local thread. Once adjusted to size, the metal plates are locked in place by a central metal bolt. The plug can be easily removed with a fire department spanner wrench. The plug can be re-installed in place by fire department personnel after shutdown. Supplied in standard red.



2502 Breaker Cap

This special moulded breaker cap is designed for quick release when every second counts. It is engineered to protect 2 1/2" swivel inlets on siamese, standpipe and sprinkler connections. It is locked in place by open eyebolts, which attach to pin lugs on swivel connections only. A sharp blow will fracture the cap and clear the connection for action. Supplied in standard red.



Threaded Caps 1500 - 1 1/2" 2000 - 2" 2500 - 2 1/2" 3000 - 3"


Designed to cut the cost of petty theft, while at the same time providing maximum protection. The U.F.S. cap is available in sizes to fit 1 1/2", 2 1/2" and 3" male threads. It comes complete with sturdy, plated attaching chain, and inside gasket. The U.F.S. cap is deal for protection of interior fire valves, where theft of expensive brass parts is most prevalent.

Available threads: 1 1/2" NHT and NPSH (SIPT),

2" NPSH (SIPT)

2 1/2" - NHT, NY(FD), NY Corp., Chicago (FD), CSA (5 X 3 1/8"), B.C. and A.M.A. (8 X 3), W.C.U., (6 X 3 1/4"), QST (7 X 3 1/32")

3" - NST W.C.U. (6 X 3 1/4")

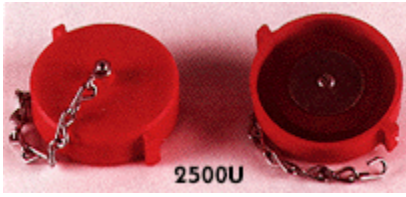

2500U Universal Hose Cap

No more thread problems! The U.F.S. universal pull cap protects all threads by gripping valve or outlet on the inside of the waterway. It comes complete with sturdy plated attaching chain. Push On - Pull Off.

U.F.S. Spanner Wrenches

Made of high tensile strength, lightweight aluminum



15W - Spanner fits up to 1 1/2" pin or rocker lug couplings. Length 7 3/4"

25WK - Fits up to 4" pin or rocker lug couplings. Includes pry bar, gas shut-off key, and top opening for belt snap ring. Length 11 1/4"

25W - Fits up to 4" pin or rocker lug coupling, comes complete with pry bar. Length 13"

25WH - Same as 25W, plus 1 1/4" square hydrant wrench. Length 15 1/4"

25WHP - Same as 25 WH but with 1 5/8 Pentagon Hydrant Wrench (measured Point to Flat) Length 15 1/4"

[Industrial and Fire Hose Nozzles](#)

[Fire
Equipment Covers](#)

[Hose
Reels](#)

[Home](#)

[Feedback](#)

United Fire Safety Co., Ltd.

In the U.S.A.:

Toll Free: 800-882-1575 | New York State: 716-684-6848 | Fax: 716-684-7118

In Canada:

Toll Free: 800-465-1575 | Fax: (905) 877-2787