

NEW FROM DBI/SALA


ISO 9001

What the crew up there wants to wear.™



# TALON™

SELF RETRACTING LIFELINE

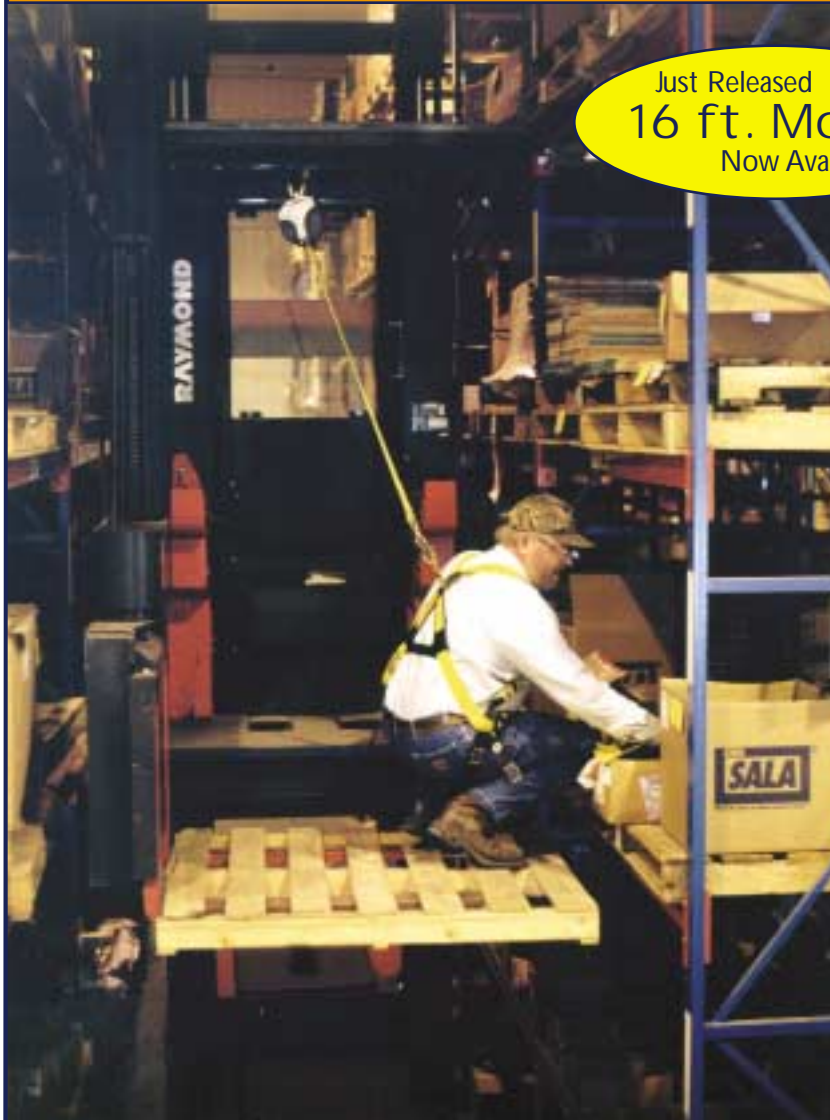

Just Released  
16 ft. Model  
Now Available

- *Smaller*
- *Lighter*
- *Stronger*
- *Safer*

And Now  
LONGER

Finally, a compact self retracting lifeline based on fall arrest technology, not seat belt technology!

- Metal anti-ratcheting velocity sensing braking system prevents irritating lock-ups - it locks when it should, won't lock when it shouldn't.
- Impact resistant super tough nylon housing combined with an all-metal braking system ensures safety and many years of service.
- Device is not just a throw-away, it is completely serviceable assuring safety and extending product life reducing the overall cost of ownership.
- Visual impact and Audible Braking System Indicators allows easy inspection and provides added safety.
- Swiveling anchorage loop prevents twisting and tangling of the lifeline.
- Exceeds OSHA and ANSI requirements including ANSI Z359.1.

*"If you're going to use seat belt technology, use it on the drive home."*

Hook-Up with Confidence!

# TALON™

SELF RETRACTING LIFELINE



Advantage® Camo Delta No-Tangle™ Harness (1107900)



Delta No-Tangle™ WorkVest Harness (1107404)

## ISO 9001

USA  
3965 Pepin Avenue  
Red Wing, MN 55066  
800-328-6146  
Fax: 651-388-5065  
www.salagroup.com

CANADA  
260 Export Boulevard  
Mississauga, Ontario  
L5S 1Y9  
800-387-7484  
Fax: 905-795-8777  
www.salagroup.com



16 ft. Model 3101051

8 ft. Model 3101001



**Easy Installation** Simply attach to a safe anchorage point above the desired work area by attaching a carabiner to the swiveling anchorage loop and to your anchorage point. Then hook-up the lifeline to the back D-ring of your Delta No-Tangle™ harness and you're ready to go.

**Easy to Use** Once the system is installed, the lifeline will extend as the worker moves away and automatically retract enabling the worker to move about within their work area at normal speeds. Should a fall occur, a velocity sensing brake system will activate stopping the fall within inches and reducing the forces imposed on the user to 900 lbs. or less.

**Easy to Remove, Relocate, Handle and Store** For removal, simply detach the carabiner from the anchorage point and the device is ready to be moved to the next work area or jobsite. Before use or storage, inspect the device, this is made easy with the Visual Impact and Audible Braking System Indicators.

**Versatile & Economical** This system is completely reusable and transportable from one job site to another. Most importantly it is completely serviceable assuring safety and extending the product life. It also comes with a Full 2-Year Warranty and a 2-year recertification period in which the first one is FREE (it will be years before you spend anything on maintenance).

- **16 ft Talon™ with Swiveling Anchorage Loop:**
  - 3101050 - 16ft Talon with self locking snap hook (003175)
  - 3101051 - 16ft Talon with swiveling self locking snap hook (1850-121)
  - 3101052 - 16ft Talon with aluminum self locking/closing carabiner (2004339)
- **8 ft Talon™ with Quick-Connect Anchorage Connector:**
  - 3101000 - 8ft Talon with self locking snap hook (003175)
  - 3101001 - 8th Talon with swiveling self locking snap hook (1850-121)
- **8 ft Talon™ with Cab-Mount Anchorage Connector:**
  - 3101008 - 8ft Talon with self locking snap hook (003175)
  - 3101009 - 8ft Talon with swiveling self locking snap hook (1850-121)

With a full quality assurance program certified under ISO 9001, DBI/SALA supplies the industry with a quality range of safety products to provide added security. That's why we back each of our fall protection and rescue systems with the best training, tech assistance and customer service in the business. It makes life easier for you and safer for the workers up there.