

REBEL™ SELF RETRACTING LIFELINE (SRL)



**TOTAL  
COMPLIANCE.  
ABSOLUTE  
CONFIDENCE.**

TRUSTED, QUALITY FALL PROTECTION



PRODUCT SHEET

# DEPENDABILITY

YOU CAN RELY ON EVERY DAY

## Protecta® continues to set the standard for performance and value.

The Rebel™ SRL line is built to last providing an economical fall protection solution without compromising performance or safety!



### Durable

- Built to last
- Heavy-duty housing types
  - Aluminum
  - Thermoplastic
- High strength lifeline options
- Stackable

### Reliable

- 420 lb. (190 kg) capacity
- 3,600 lb. (1,633 kg) gate capacity
- Side cable exit
- Top swivel

### Markets Served

- Commercial Construction
- Residential Construction
- Industry & Manufacturing
- Refinery Maintenance & Construction
- And More!

	6' (1.8m)	10' (3m)	11' (3.3m)	15' (4.5m)	20' (6m)	33' (10m)	50' (15m)	66' (20m)	82' (25m)	100' (30m)
1 Swiveling Anchorage Connection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2 420 lb. (190 kg) Capacity						✓	✓	✓	✓	✓
3 Stackable	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
4 Side Cable Exit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5 3/16" (5mm) Wire Rope (Galv or SS)						✓	✓	✓	✓	✓
6 High Strength Thin Webbing	✓	✓	✓	✓	✓					
7 Thermoplastic Housing						✓	✓	✓	✓	✓
8 Aluminum Housing	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
9 Carrying Handle						✓	✓	✓	✓	✓
10 Self Locking Snap Hook	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
11 3,600 lb. (1,633 kg) Rated Gate	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12 Swiveling Hook	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
13 Impact Indicator On Hook						✓	✓	✓	✓	✓

# EXPLORE THE SYSTEM

## Unique Packaging



**2 420 lb. (190 kg) Capacity**  
Higher capacity for operator and tools

**1 Top Swivel**  
Limits lifeline twisting.

**3 Stackable**  
Housing design allows for stacking on work surfaces

**7 Thermoplastic Housing**  
Lightweight, compact and durable

or

**8 Aluminium Housing**  
Provides exceptional strength and durability

**9 Ergonomic Carrying Handle**  
Built-in design makes transport, set-up and storage easy

**1 Top Swivel**  
Limits lifeline twisting

**4 Side Cable Exit**  
Enables smooth operation and reduces cable wear

**Ergonomic Cable Handle**  
Provides added comfort and ease-of-use when making connections

**8 Rugged Aluminium Housing**  
Provides exceptional strength and durability

**5 Galvanized and SS Cable**  
Stainless steel option for added corrosion resistance

**12 Swivel Hook**  
Limits lifeline twisting

## Economical Lanyard Replacement

**6 High Strength Thin Webbing**  
For added durability and longevity

**13 Impact Indicator**  
Provides visual indication of Fall Arrest


**13 Impact Indicator**  
Provides visual indication of Fall Arrest

**10 Self Locking Snap Hook**  
Automatically closes and locks for added safety

**10 Self Locking Snap Hook**  
Automatically closes and locks for added safety

**11 3,600 lb. (1,633 kg) Gate Capacity**  
Reduces chance of accidental disengagement ("roll-out")

**11 3,600 lb. (1,633 kg) Gate Capacity**  
Reduces chance of accidental disengagement ("roll-out")

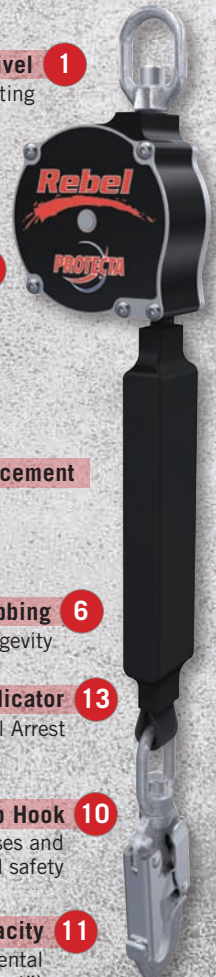

# REBEL™ ORDERING INFORMATION

Certification		Lifeline Material		Thermoplastic Housing		Aluminum Housing		Swiveling Anchorage		Swiveling Hook		310 lb. (140 kg) Weight Capacity		420 lb. (190 kg) Weight Capacity		Cable/Web Length																								
																6' (1.8m)	10' (3m)	11' (3.3m)	15' (4.5m)	20' (6m)	33' (10m)	50' (15m)	66' (20m)	82' (25m)	100' (30m)															
OSHA / ANSI	Galv Cable																				3590500	3590550	3590590	3590630	3590670															
																															3590510	3590560	3590600	3590640	3590680					
	SS Cable																					3590501	3590551	3590591	3590631	3590671														
																																3590511	3590561	3590601	3590641	3590681				
	Web																																							
CSA	Galv Cable																AD115BC**					3590502	3590552	3590592	3590632	3590672														
	SS Cable																	3506062C**	AD210BC**	3506050C																				
	Web																																							
Weight		2.6 lbs (1.2 kg)		2.8 lbs (1.3 kg)		2.8 lbs (1.3 kg)		7.9 lbs (3.6 kg)		5.1 lbs (2.3 kg)		13.5 lbs (6.1 kg)		17.3 lbs (7.8 kg)		22 lbs (10 kg)		28.6 lbs (13 kg)		29.5 lbs (13.4 kg)																				
Approximate Depth		2" (5cm)		2" (5cm)		2" (5cm)		2" (5cm)		2" (5cm)		4.6" (12cm)		4.6" (12cm)		5.5" (14cm)		5.5" (14cm)		5.5" (14cm)																				
Approximate Width		4" (10cm)		4" (10cm)		4" (10cm)		4" (10cm)		2" (5cm)		9.8" (25cm)		11" (28cm)		12.8" (33cm)		12.8" (33cm)		12.8" (33cm)																				
Approximate Height*		19" (48cm)		19" (48cm)		19" (48cm)		20.5" (52cm)		20.5" (52cm)		22.5" (57cm)		23.8" (61cm)		25.7" (65cm)		25.7" (65cm)		25.7" (65cm)																				

Standards: Meets OSHA 1926.502, OSHA 1910.66, ANSI Z359.1, ANSI Z359.12, ANSI A10.32, CSA Z259.2.2 Type II, \*\*CSA Z259.2.2 Type I

\*Anchor point to anchor point  
†Web Unit

## ACCESSORIES



USA	CANADA	Description
1191209	1191209C	PRO™ Line Construction Style Harness
AD001	AD001	Cab Mount Bracket w/Hardware, for Rebel™ (web)
1200101	1200101	60' (18m) PRO-Line™ Horizontal Lifeline System with two 6' (1.8m) Tie-Off Adaptors and Carrying Bag
AJ408AG	AJ408CG-6	Tie-off Adapter, 6' x 1/4" (1.8m x 6mm) Coated Galvanized Cable w/AJ520A Hook & 3" O-ring
AJ450A	AJ450C-3	Tie-off Adapter, 3' (.9m) Web
AJ450A6	AJ450C-6	Tie-off Adapter, 6' (1.8m) Web
2190053	2190053	Anchor, Concrete, Wedge
2190055	2190055	Anchor, Concrete, Bolt
AJ720A	AJ720A	Anchor, Concrete, Plate, w/D-ring & Bolts
AJ730A	AJ730A	Anchor, Roof, Steel, Reusable
AJ703A	AJ703A	Raildog™ Sliding Rail Anchor
AN112A	AN112C	Anchorage, Eyebolt, Wide "D"
2000115	AJ514A	Carabiner, Self Closing/Locking Gate

Capital Safety - USA: 800 328 6146

Canada: 800 387 7484 | Latin America: +1 651 385 4301

Asia: +65 65587758 | Germany: +49 (0)30 92 03 83 87 00

New Zealand: 0800 212 505 | Australia: 1800 245 002

Europe, Middle East, Africa: +33 (0)4 97 10 00 10

Northern Europe: +44 (0)1928 571324

www.capitalsafety.com | info@capitalsafety.com

