



NIRU® CUSHION-EASE® NIRU® CUSHION-EASE® SOLID


#650

#656

SAFETY / ANTI-FATIGUE • "WET/DRY" • SUPERIOR™

- **Sales Tip:** The amount of slip resistance required, and exposure to chemicals, oils, and greases are the key determining factors when choosing between GSII™ or Niru® Cushion-Ease® products.
- **Where to Specify:** (#650) Intended for harsh wet environments where industrial chemicals, oils, greases, and animal fats are often found. (#656) should be recommended for industrial applications where exposure to chemicals, oils, greases, and animal fats can create slip hazards.

- 100% Nitrile rubber compound provides the highest degree of resistance to chemicals, oils, and greases
- Available in perforated (#650), or solid top (#656) versions
 - #650 has a large hole drainage system that facilitates the removal of liquid and debris from the work area
 - #656 offers solid-top construction for additional anti-fatigue relief, and is easy to clean
- Overall thickness is 3/4 inch
- Modular design is compatible with NoTrax® #551 M.D. Ramp System® and can accommodate a variety of custom configurations (see page 24 for more information)

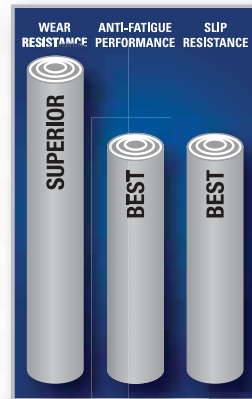

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Part of the Solutions™ product line. See pages 30 – 31 for details.

Solutions™
BY NOTRAX®

#650/656 Niru® Cushion-Ease® Solid

Stock Size	3' x 3'	3' x 5'
Weight (lbs.) #650	23	40
Weight (lbs.) #656	29	N/A

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



#650