



SEALED-BLOK™

SELF RETRACTING LIFELINES



- Field Proven Technology
- RSQ™ Feature
- 420 Lb. Capacity
- Retrieval Capabilities



WHY A SEALED-BLOK™ ?

Trusted

DBI-SALA™ continues to set the standard for quality in fall protection. The DBI-SALA™ Sealed-Blok™ family has the most comprehensive line of sealed SRLs in the industry and decades of proven field service.

The best just got better...

Durable

- Stands up to the harshest environments!
- Heavy-duty design
 - Corrosion resistant
 - Stainless steel end-plates
 - Aluminum housing
- Certified for horizontal applications

Reliable

- Dynamic components sealed inside the housing (IP68 rated).
 - Protects from particles entering product
 - Protected against complete or continuous submersion in water
- Decades of service
- Field proven in the world's toughest environments
- Design extends maintenance intervals and product longevity

Typical Applications

- Offshore platform access
- Confined space
- Saltwater environments
- Dirty environments

Typical Markets

- Oil and Gas
- Off-Shore Wind Energy
- Mining
- Marina
- Utilities
- Waste water treatment
- Municipalities



	15' (4.5m)	30' (9m)	50' (15m)	85' (26m)	130' (39m)	175' (52.5m)
Sealed Design	✓	✓	✓	✓	✓	
1 Retrieval Models		✓	✓	✓	✓	✓
2 RSQ™ Model			✓			
3 FAST-Line™ Field Replaceable Lifeline			✓			
310 lb. (140 kg) Capacity	✓	✓	✓	✓	✓	✓
4 420 lb. (190 kg) Capacity			✓			
Meets IP58	✓	✓	✓	✓	✓	
5 Meets IP68	✓	✓	✓			
6 Carrying Handle	✓	✓	✓			
7 Pivoting Anchorage Loop	✓	✓				
8 i-Safe™	✓	✓	✓	✓	✓	✓
9 Tripod/Davit Arm Bracket (Optional)		✓	✓			
Ladder Bracket (Optional)	✓	✓	✓	✓	✓	✓
Snap Hook (Patented)	✓	✓	✓	✓	✓	✓
10 - 3,600 lb. (1633 kg) Rated Gate	✓	✓	✓	✓	✓	✓
11 - Self-Locking Gate	✓	✓	✓	✓	✓	✓
- Swiveling Hook	✓	✓	✓	✓	✓	✓
12 - Impact Indicator on Hook	✓	✓	✓	✓	✓	✓
- ANSI Z359.1/ Z359.12 Compliant	✓	✓	✓	✓	✓	✓
13 3/16 (5mm) Diameter Wire Rope	✓	✓	✓	✓	✓	✓
14 Aluminum Housing	✓	✓	✓	✓	✓	✓
15 Stainless Steel End-Plate	✓	✓	✓	✓	✓	✓

420 Lb. Weight Capacity 4
Higher capacity for operator & tools

New Sealed Design (Patent Pending) 5
Meets IP68 Rating

Carrying Handle 6
Improved ergonomics

Retrieval Winch 1

3/16 (5mm) Diameter Wire Rope 13
Stainless steel for corrosion resistance

7 Pivoting Anchorage Loop
Centers the load

14 Aluminum Housing
Corrosion Resistant

15 Stainless Steel End-Plate
Durable construction for harsh environments

9 Tripod/Davit Arm Bracket
No tools required for install

2 RSQ™


3 FAST-Line™ Patent Pending

8 i-Safe™
Track inspection, control inventory & manage information

12 Impact Indicator
Provides visual indication of Fall Arrest

11 Self-Locking Swivel
Limits lifeline twisting

10 3600 lb. Gate
Reduces accidental disengagement

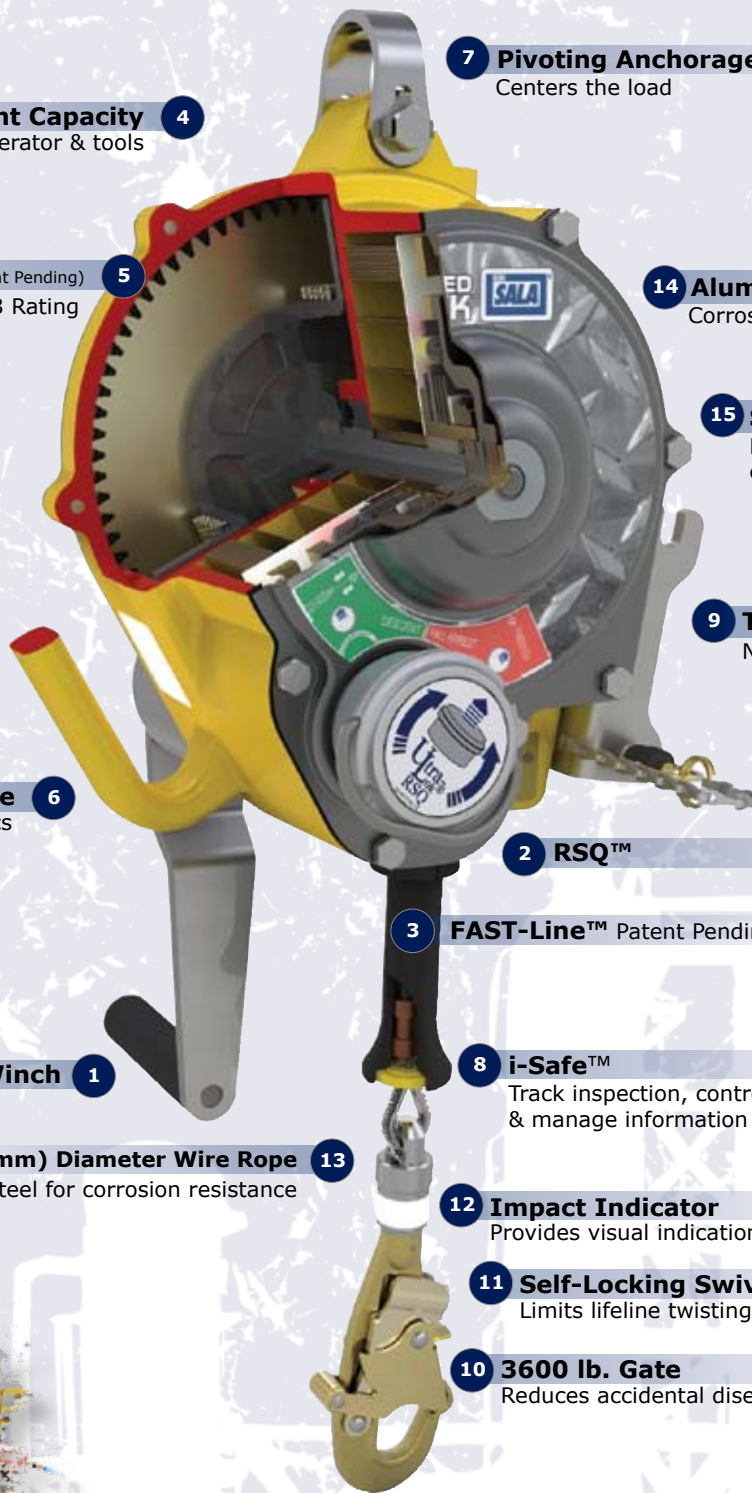



MULTIPLE BUILT-IN RESCUE OPTIONS FOR SUPERIOR SAFETY



Yellow = RSQ™ *

RSQ™ INTEGRAL PART OF ANY RESCUE PLAN

Patent-Pending Industry First!

No other brand has the exclusive DBI-SALA™ dual-mode rescue operation! Our RSQ™ feature allows the user, prior to connection, to choose their mode of operation. This two-in-one operation lowers the cost of ownership by reducing the need for separate rescue equipment.

- Built in Rescue Device becomes integral part of a Rescue Plan
- Standard fall arrest mode
- Automatic rescue mode
- Remote/Assisted activation

CHOOSE YOUR MODE



Fall Arrest Mode (Assisted Rescue, for retrieval use only):

1. Fall Occurs
2. Fall is Arrested (just like standard model)
3. Rescuer engages RSQ™ feature using remote tool or hand
4. User is lowered to next level or ground



Automatic Rescue/Descent Mode:

1. Fall Occurs
2. Fall is Arrested (just like standard model)
3. User is automatically lowered to next level or ground



These Assisted Rescue Options "Activate" the Automatic Rescue Mode. Traditional assisted rescue operations may also be conducted.



Retrieval Models

- Raise and lower personnel or materials
- Simple change in/out of Retrieval
- Stow away handle
- Optional bracket for davit attachment
- Available with RSQ™ Option
- For rescue use only

FAST-Line™ Field Replaceable Lifeline

- Provides trained End-Users with the ability to replace lifeline
- SRL will not operate if rebuilt improperly
- No need to break seal to replace lifeline
- Lowers overall cost of ownership
- Minimal training required

i-Safe™ Intelligent Safety System

- Track Inspections
- Control Inventory
- Manage Information



OPTIONS & ACCESSORIES




FAST-Line™ Cable Replacement Assemblies	
Model #	Description
3900105	Cable replacement assembly for FAST-Line™, Galvanized cable with plated hook (50ft/15m Model only)
3900106	Cable replacement assembly for FAST-Line™, Stainless Steel cable with plated hook (50ft/15m Model only)
3900107	Cable replacement assembly for FAST-Line™, Stainless Steel cable with Stainless Steel hook (50ft/15m Model only)



3500201: First-Man-Up™ Pole with Assisted Rescue Tool



1003006



5900551



3500200
Assisted Rescue
Tool Only



9600037
Repair Tool



2000112




2000113



2000114

Model #	Description
3500201	First-Man-Up™ Pole, 6-12 ft. (1.8-3.6m) with Assisted Rescue Tool
3500202	First-Man-Up™ Pole, 8-16 ft. (2.4-4.8m) with Assisted Rescue Tool
3500200	Assisted Rescue Tool Only - If you already have a First-Man-Up™ Pole
1003006	Tie-Off Adaptor, Pass-Thru Type, 6 ft. (1.8m)
5900551	Cable Choker, Pass-Thru Type, 6 ft. (1.8m)
2000112	Saflok™ Steel Carabiner, Self Locking/Closing, 3/4" Gate Opening (19mm)
2000113	Saflok™ Steel Carabiner, Self Locking/Closing, 1-3/16" Gate Opening (30mm)
2000114	Saflok™ Steel Carabiner, Self Locking/Closing, 2" Gate Opening (50mm)

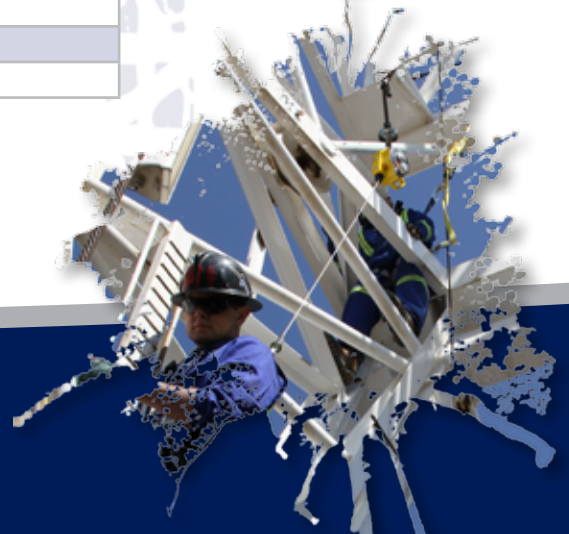



SEALED-BLOK™ ORDERING INFORMATION

		Cable Length															
		15 ft (4.5m)	30 ft (9m)	50 ft (15m)	85 ft (25.5m)	130 ft (39m)	175 ft (52.5m)										
Weight		12 lbs (5.5kg)	18 lbs (8kg)	29 lbs (13kg)	44 lbs (20kg)	60 lbs (27kg)	100 lbs (45kg)										
Housing Material		Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum										
Approximate Standard & RSQ Model Length		10.2" (26cm)	11.5" (29cm)	13.3" (34cm)	16" (41cm)	18.7" (48cm)	18.7" (48cm)										
Approximate Standard & RSQ Model Width		7.6" (19cm)	9.4" (24cm)	10.4" (27cm)	9.9" (25cm)	11.7" (30cm)	11.7" (30cm)										
Approximate Standard & RSQ Model Height		4.3" (11cm)	5.4" (14cm)	6.9" (18cm)	6.7" (17cm)	7.2" (18cm)	10.9" (28cm)										
Approximate Standard & RSQ Retrieval Model Length			11.5" (29cm)	13.3" (34cm)	16" (41cm)	18.7" (48cm)	18.7" (48cm)										
Approximate Standard & RSQ Retrieval Model Width			9.4" (24cm)	11.5" (29cm)	9.2" (23cm)	11.7" (30cm)	11.7" (30cm)										
Approximate Standard & RSQ Retrieval Model Height			8.8" (22cm)	12.7" (32cm)	10.2" (26cm)	10.7" (27cm)	10.7" (27cm)										
Sealed Design		Sealed	Sealed	Sealed	Sealed	Sealed	Non-Sealed										
FAST-Line™				Standard													
Certification	Lifeline Material	Hook Material	Includes Mounting Bracket	Retrieval Capability	RSQ™ Capability	310 (141kg) Weight Capacity	420 (189kg) Weight Capacity										
ANSI OSHA	Galv Cable	Steel						3400825	3400800			3400900	3403500	3403600	3400610		
										3400850			3403502	3403602	3400620		
													3400920				
													3400940				
													3400930				
											3400853			3400311	3400509		
	SS Cable	SS															
CSA	Galv Cable	Steel															
	SS Cable	SS															

Standards: Meets OSHA 1926.502, OSHA 1910.66, ANSI Z359.1, ANSI A10.32, CSA Z259.2.2 Type II

Capital Safety

USA: 800.328.6146 • Canada: 800.387.7484 • Latin America: +1 651.385.4301 • Asia: +65 6558 7758 • Australia: 1800 245 002
 New Zealand: 0800 212 505 • Europe, Middle East, Africa: +33 (0)4 97 10 00 10 • Northern Europe: +44 (0) 1928 571324
 Germany: +49 (0) 30 92 03 83 87 00

www.capitalsafety.com • info@capitalsafety.com

©2010, Capital Safety
 Form: 9700206 Rev: D